

BM78XX

... BM7805

3-TERMINAL POSITIVE VOLTAGE REGULATORS

Features

- Maximum Output Current of >1000mA (Tc=25°C)
- Internal Short-Circuit Current Limiting
- Internal Thermal Overload Protection
- 3% Output Tolerance
- TO252,TO263,TO220 Package

Description

BM78XX regulators employ internal current-limiting and thermal-shutdown, making them essentially indestructible. They can deliver up to 1000mA output BM7805 can continuously output 1.0A when +8V input


BM7805 TO220 and TO263 can output 0.8A when +12V input

Applications


- LCD-TV tuner
- Car electronics

Pin Assignment

TO-252 FRONT VIEW



2L TO-263 FRONT VIEW

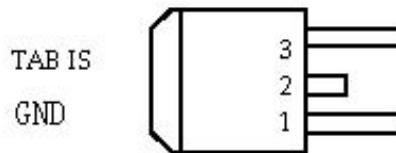

Ordering Information


BM78xxAS	1A	TO252 / TO220
BM7805L	1A	TO263-2

Note: XX: Voltage Output. 05(5V); 08(8V), 09(9V), 12(12V)

BM78xxAS, the marking is AS78XX, in datacode, it is BMabcdef(ab=year, cd=weeks, ef=producing number)

BM7805L, the marking is L7805CVA

Typical Application


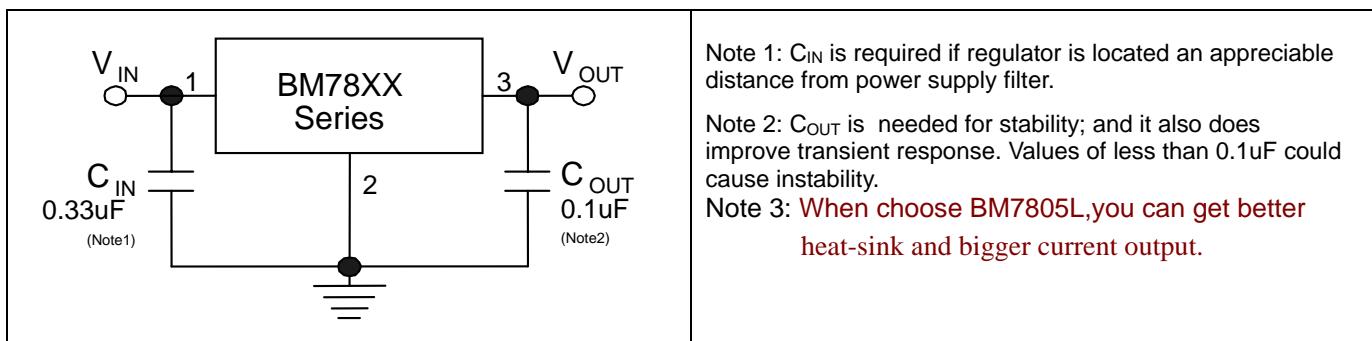


Absolute Maximum Ratings

(Ta=25°C, Unless Otherwise Specified)

Characteristic	Symbol	Rating		Unit
Input Voltage	V _{IN}	+37V		
Power Dissipation	P _D	TO252	3.50	W
Operating Temperature	T _{opr}	-20 to 85		°C
Storage Temperature	T _{stg}	-55 to 150		°C
Junction Temperature	T _j	150		°C
Thermal Resistance	R _{th(j-a)}	208		°C/W

Schematic Diagram & Equivalent Circuit

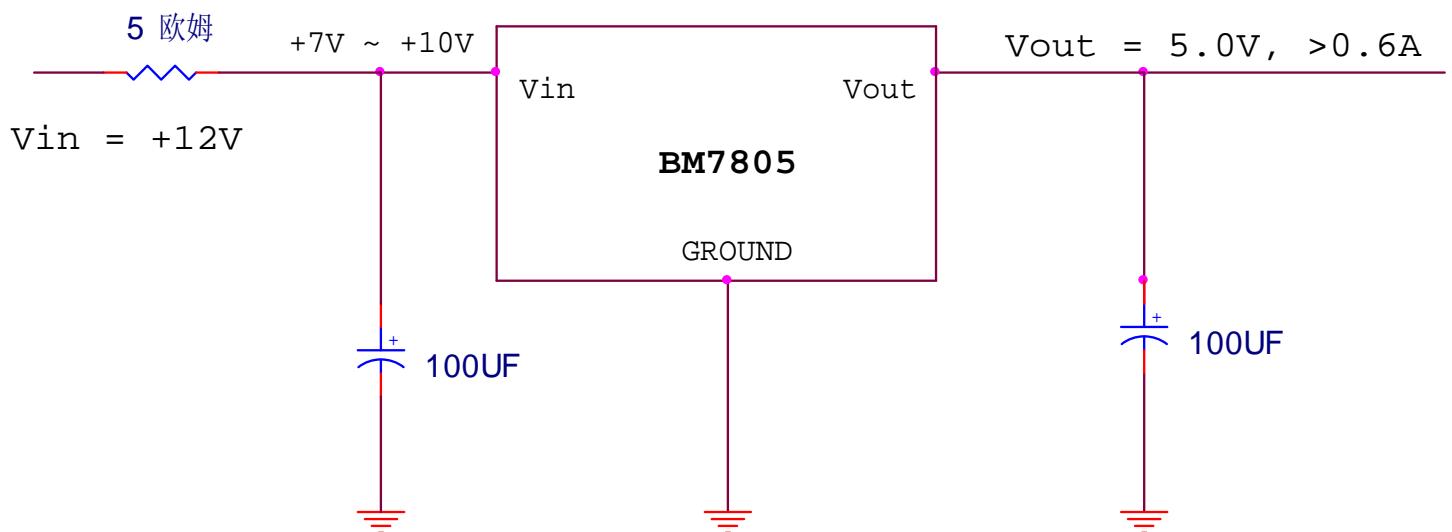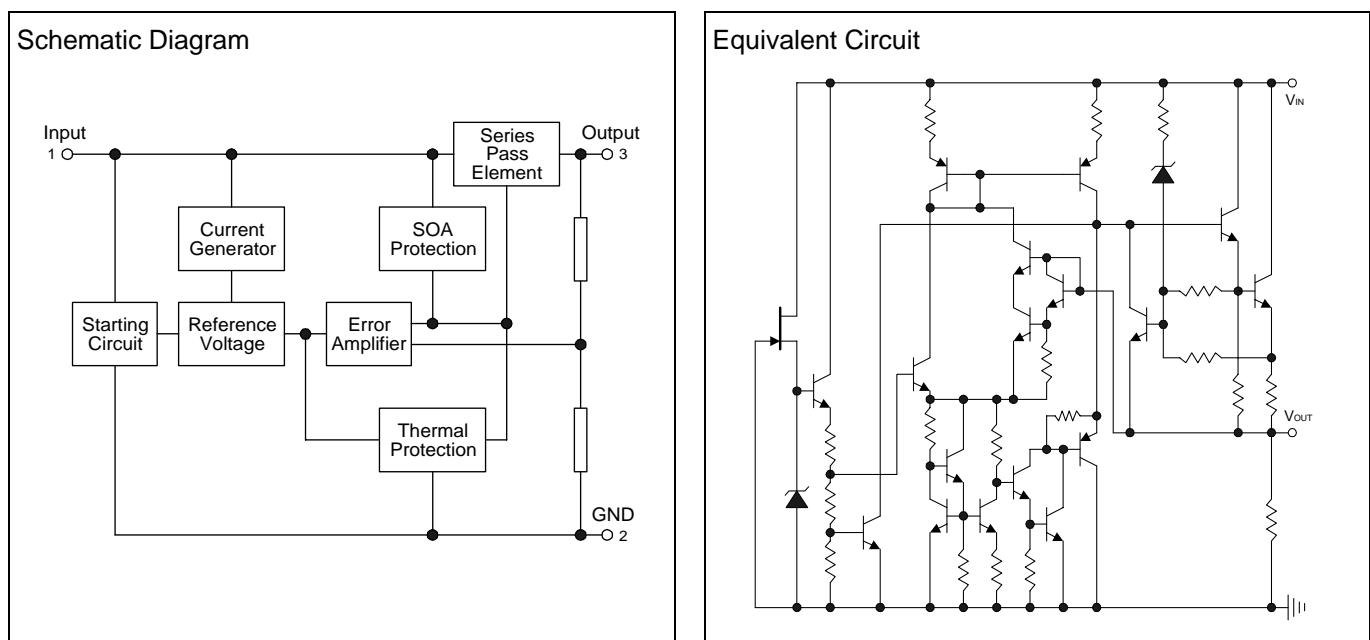

BM78XX

3-Terminal Positive Voltage Regulators

BM7805 Electrical Characteristics

$V_{IN}=10V$, $I_{OUT}=40mA$, $C_{IN}=0.33\mu F$, $C_{OUT}=0.1\mu F$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$

Symbol	Parameter	Conditions	BM7805			Units	
			Min	Typ	Max		
V_o	Output Voltage	$T_j=25^{\circ}C$	4.85	5	5.15	V	
		$1mA \leq I_{OUT} \leq 800mA$	4.85	5	5.15		
		$7V \leq V_{IN} \leq 18V$, $1mA \leq I_{OUT} \leq 40mA$					
Reg_{line}	Line Regulation	$T_j=25^{\circ}C$, $7V \leq V_{IN} \leq 18V$	-	15	150	mV	
		$T_j=25^{\circ}C$, $8V \leq V_{IN} \leq 18V$	-	15	100		
Reg_{load}	Load Regulation	$T_j=25^{\circ}C$, $1mA \leq I_{OUT} \leq 500mA$	-	11	60	mV	
		$T_j=25^{\circ}C$, $1mA \leq I_{OUT} \leq 40mA$	-	5	30		
I_B	Quiescent Current	$I_{OUT}=5mA$, $T_j=25^{\circ}C$	-	8	10	mA	
ΔI_B	Quiescent Current Change	$8V \leq V_{IN} \leq 18V$, $T_j=25^{\circ}C$	-	-	1.5	mA	
		$1mA \leq I_{OUT} \leq 40mA$, $T_j=25^{\circ}C$	-	-	0.1		
V_N	Output Noise Voltage	$10Hz \leq f \leq 100KHz$, $T_j=25^{\circ}C$	-	40	-	uVrms	
RR	Ripple Rejection	$8V \leq V_{IN} \leq 18V$, $f=120Hz$, $T_j=25^{\circ}C$	41	49	-	dB	
V_D	Dropout Voltage	$T_j=25^{\circ}C$, $I_{OUT}=100mA$	1.7	2.5	-	V	
R_O	Output Resistance	$f=1KHz$	-	17	-	mΩ	
I_{SC}	Short Circuit Current	$V_{IN}=10V$, $T_j=25^{\circ}C$	-	1.5	2	A	
T_{CVO}	Average Temperature Coefficient of Output Voltage	$I_{OUT}=5mA$	-	-	0.6	mV/°C	

BM7808 Electrical Characteristics $V_{IN}=14V$, $I_{OUT}=40mA$, $C_{IN}=0.33\mu F$, $C_{OUT}=0.1\mu F$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$ (unless otherwise specified)

Symbol	Parameter	Conditions	BM7808			Units	
			Min	Typ	Max		
V_O	Output Voltage	$T_j=25^{\circ}C$	7.8	8	8.25	V	
		$1mA \leq I_{OUT} \leq 1000mA$	7.8	8	8.25		
		$10.5V \leq V_{IN} \leq 23V$, $1mA \leq I_{OUT} \leq 40mA$					
Reg_{line}	Line Regulation	$T_j=25^{\circ}C$, $10.5V \leq V_{IN} \leq 23V$	-	20	175	mV	
		$T_j=25^{\circ}C$, $11V \leq V_{IN} \leq 23V$	-	20	125		
Reg_{load}	Load Regulation	$T_j=25^{\circ}C$, $1mA \leq I_{OUT} \leq 500mA$	-	15	80	mV	
		$T_j=25^{\circ}C$, $1mA \leq I_{OUT} \leq 40mA$	-	7	40		
I_B	Quiescent Current	$I_{OUT}=5mA$, $T_j=25^{\circ}C$	-	3.9	6	mA	
ΔI_B	Quiescent Current Change	$11V \leq V_{IN} \leq 23V$, $T_j=25^{\circ}C$	-	-	1.5	mA	
		$1mA \leq I_{OUT} \leq 40mA$, $T_j=25^{\circ}C$	-	-	0.1		
V_N	Output Noise Voltage	$10Hz \leq f \leq 100KHz$, $T_j=25^{\circ}C$	-	60	-	uVrms	
RR	Ripple Rejection	$12V \leq V_{IN} \leq 23V$, $f=120Hz$, $T_j=25^{\circ}C$	37	45	-	dB	
V_D	Dropout Voltage	$T_j=25^{\circ}C$, $I_{OUT}=100mA$	-	1.7	2.5	V	
R_O	Output Resistance	$f=1KHz$	-	17	-	mΩ	
I_{SC}	Short Circuit Current	$T_j=25^{\circ}C$	-	1.5	2	A	
T_{CVO}	Average Temperature Coefficient of Output Voltage	$I_{OUT}=5mA$	-	-	0.9	mV/°C	


BM7809 Electrical Characteristics $V_{IN}=15V$, $I_{OUT}=40mA$, $C_{IN}=0.33\mu F$, $C_{OUT}=0.1\mu F$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$ (unless otherwise specified)

Symbol	Parameter	Conditions	BM7809			Units	
			Min	Typ	Max		
V_O	Output Voltage	$T_j=25^{\circ}C$	8.70	9	9.30	V	
		$1mA \leq I_{OUT} \leq 500mA$	8.70	9	9.30		
		$11.4V \leq V_{IN} \leq 24V$, $1mA \leq I_{OUT} \leq 40mA$					
Reg_{line}	Line Regulation	$T_j=25^{\circ}C$, $11.4V \leq V_{IN} \leq 24V$	-	80	200	mV	
		$T_j=25^{\circ}C$, $12V \leq V_{IN} \leq 24V$	-	20	160		
Reg_{load}	Load Regulation	$T_j=25^{\circ}C$, $1mA \leq I_{OUT} \leq 500mA$	-	17	90	mV	
		$T_j=25^{\circ}C$, $1mA \leq I_{OUT} \leq 40mA$	-	8	45		
I_B	Quiescent Current	$I_{OUT}=5mA$, $T_j=25^{\circ}C$	-	3.9	6	mA	
ΔI_B	Quiescent Current Change	$12V \leq V_{IN} \leq 24V$, $T_j=25^{\circ}C$	-	-	1.5	mA	
		$1mA \leq I_{OUT} \leq 40mA$, $T_j=25^{\circ}C$	-	-	0.1		
V_N	Output Noise Voltage	$10Hz \leq f \leq 100KHz$, $T_j=25^{\circ}C$	-	65	-	uVrms	
RR	Ripple Rejection	$12V \leq V_{IN} \leq 24V$, $f=120Hz$, $T_j=25^{\circ}C$	36	44	-	dB	
V_D	Dropout Voltage	$T_j=25^{\circ}C$, $I_{OUT}=100mA$	-	1.7	2.5	V	
R_O	Output Resistance	$f=1KHz$	-	17	-	mΩ	

I_{SC}	Short Circuit Current $T_j=25^\circ C$	-	1.5	2	A
T_{CVO}	Average Temperature Coefficient of Output Voltage $I_{OUT}=5mA$	-	-	1	$mV/^\circ C$


BM7812 Electrical Characteristics $V_{IN}=19V$, $I_{OUT}=40mA$, $C_{IN}=0.33\mu F$, $C_{OUT}=0.1\mu F$, $0^\circ C \leq T_j \leq 125^\circ C$ (unless otherwise specified)

Symbol	Parameter	Conditions	BM7812			Units
			Min	Typ	Max	
V_O	Output Voltage	$T_j=25^\circ C$	11.5	12	12.5	V
		$1mA \leq I_{OUT} \leq 500mA$	11.5	12	12.5	
		$14.5V \leq V_{IN} \leq 27V$, $1mA \leq I_{OUT} \leq 40mA$	-	-	-	
Reg_{line}	Line Regulation	$T_j=25^\circ C$, $14.5V \leq V_{IN} \leq 27V$	-	120	250	mV
		$T_j=25^\circ C$, $16V \leq V_{IN} \leq 27V$	-	100	200	
Reg_{load}	Load Regulation	$T_j=25^\circ C$, $1mA \leq I_{OUT} \leq 500mA$	-	20	100	mV
		$T_j=25^\circ C$, $1mA \leq I_{OUT} \leq 40mA$	-	10	50	
I_B	Quiescent Current	$I_{OUT}=5mA$, $T_j=25^\circ C$	-	3.9	6	mA
ΔI_B	Quiescent Current Change	$16V \leq V_{IN} \leq 27V$, $T_j=25^\circ C$	-	-	1.5	mA
		$1mA \leq I_{OUT} \leq 40mA$, $T_j=25^\circ C$	-	-	0.1	
V_N	Output Noise Voltage	$10Hz \leq f \leq 100KHz$, $T_j=25^\circ C$	-	80	-	μV_{rms}
RR	Ripple Rejection	$15V \leq V_{IN} \leq 25V$, $f=120Hz$, $T_j=25^\circ C$	36	41	-	dB
V_D	Dropout Voltage	$T_j=25^\circ C$, $I_{OUT}=100mA$	-	1.7	2.5	V
R_O	Output Resistance	$f=1KHz$	-	17	-	$m\Omega$
I_{SC}	Short Circuit Current	$T_j=25^\circ C$	-	1.5	2	A
T_{CVO}	Average Temperature Coefficient of Output Voltage	$I_{OUT}=5mA$	-	-	1.4	$mV/^\circ C$

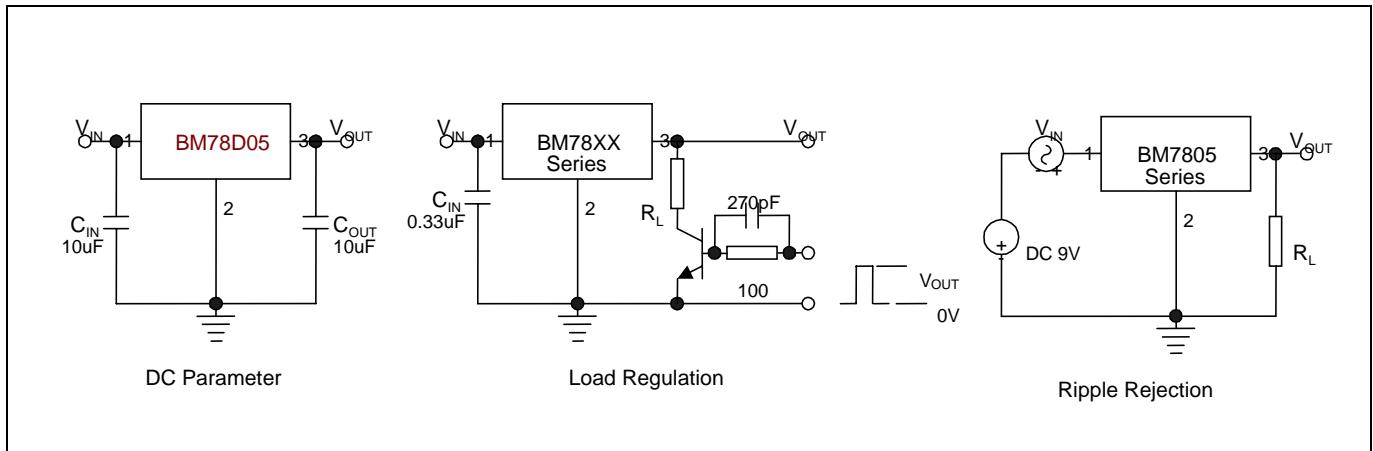Test Circuits

Application Circuits


Constant Current Regulator

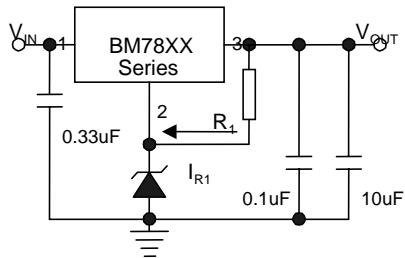

$$V_{OUT} = V_{OUT(IC)} + V_Z$$


$$I_I = V_{OUT(IC)} / R_1$$

Circuit for Increasing Output Voltage

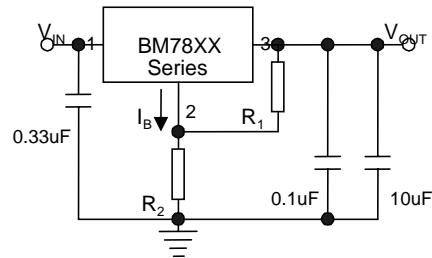


$$V_{OUT} = V_{OUT(IC)}(1 + R_2/R_1) + R_2 \cdot I_B$$

Adjustable Output Regulator

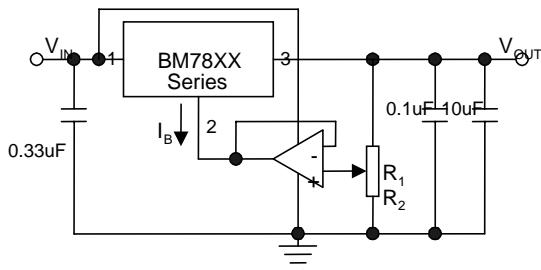

$$V_{OUT} = V_{OUT(IC)}(1 + R_2/R_1)$$


High Output Current with Short-circuit Protection

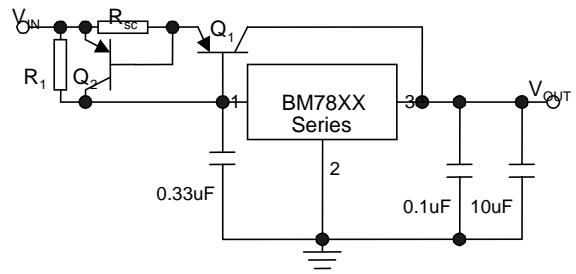

$$R_1 \leq V_{BE1} / I_{B(max)}$$

$R_{SC} = V_{BE2} / I_{SC}$, I_{SC} : Short-Circuit Current

TO252-2 Dimension

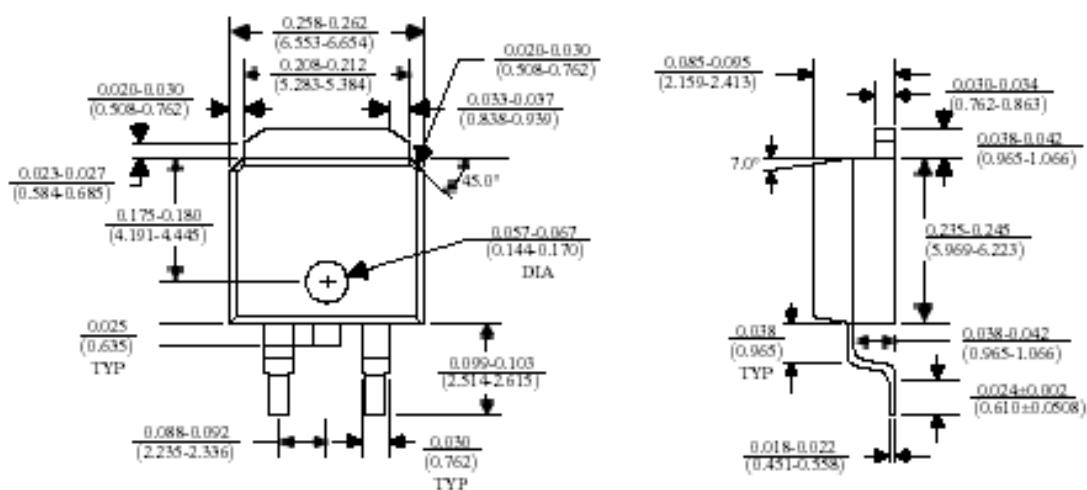


Soldering Methods

1. Storage environment: Temperature=10°C~35°C Humidity=65%±15%

2. Reflow soldering of surface-mount devices

Figure 1: Temperature profile

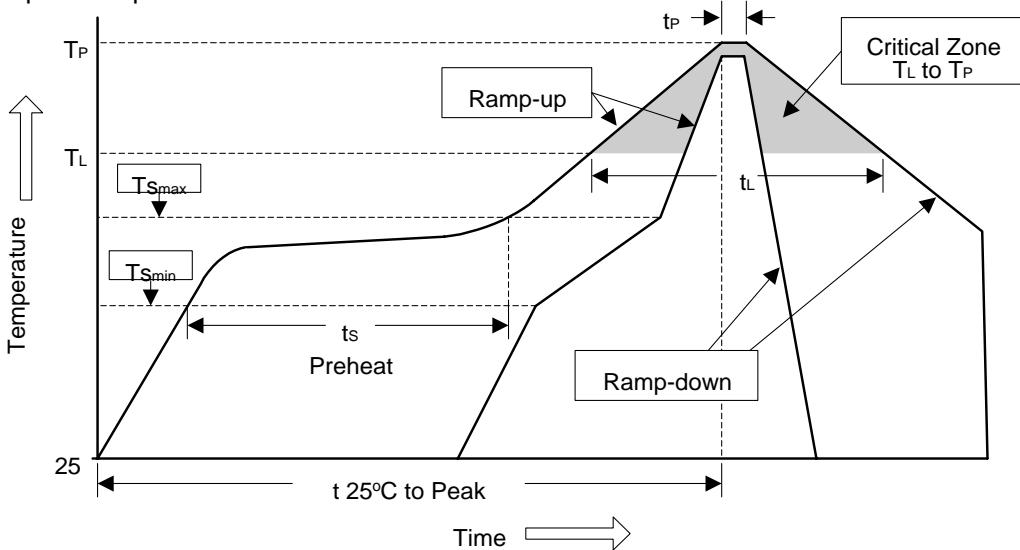

Profile Feature	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Average ramp-up rate (T_L to T_P)	<3°C/sec	<3°C/sec
Preheat		
- Temperature Min ($T_{S\min}$)	100°C	150°C
- Temperature Max ($T_{S\max}$)	150°C	200°C
- Time (min to max) (t_S)	60~120 sec	60~180 sec
$T_{S\max}$ to T_L		
- Ramp-up Rate	<3°C/sec	<3°C/sec
Time maintained above:		
- Temperature (T_L)	183°C	217°C
- Time (t_L)	60~150 sec	60~150 sec
Peak Temperature (T_P)	240°C +0/-5°C	260°C +0/-5°C
Time within 5°C of actual Peak Temperature (t_P)	10~30 sec	20~40 sec
Ramp-down Rate	<6°C/sec	<6°C/sec
Time 25°C to Peak Temperature	<6 minutes	<8 minutes

3. Flow (wave) soldering (solder dipping)

Products	Peak temperature	Dipping time
Pb devices. STOPPED		
Pb-Free devices.	260°C +0/-5°C	5sec ±1sec