


70 MHz Bandpass SAW Filter

11 MHz Bandwidth



BP60180

Specifications					
Parameter	Sym	Minimum	Typical	Maximum	Unit
Center Frequency at 25°C	fc	69.8	70	70.2	MHz
Insertion Loss at fc	IL	-	22.6	24.0	dB
1 dB Bandwidth	BW ₁	10.7	11.2	-	MHz
3 dB Bandwidth	BW ₃	11.0	11.9	-	MHz
40dB Bandwidth	BW ₄₀	-	14.0	14.2	MHz
Passband Variation	-	-	0.5	0.6	dB
Phase Linearity	-	-	3.0	4.0	Deg
Group Delay Variation	-	-	40	70	nsec
Absolute Delay	-	-	2.0	-	μsec
Ultimate Rejection	-	55	60	-	dB
Substrate Material	-	-	128-LiNbO ₃	-	-
Ambient Temperature	Ta	-	25	-	°C
Operating Temperature Range	To	-55	25	85	°C

Typical Performance

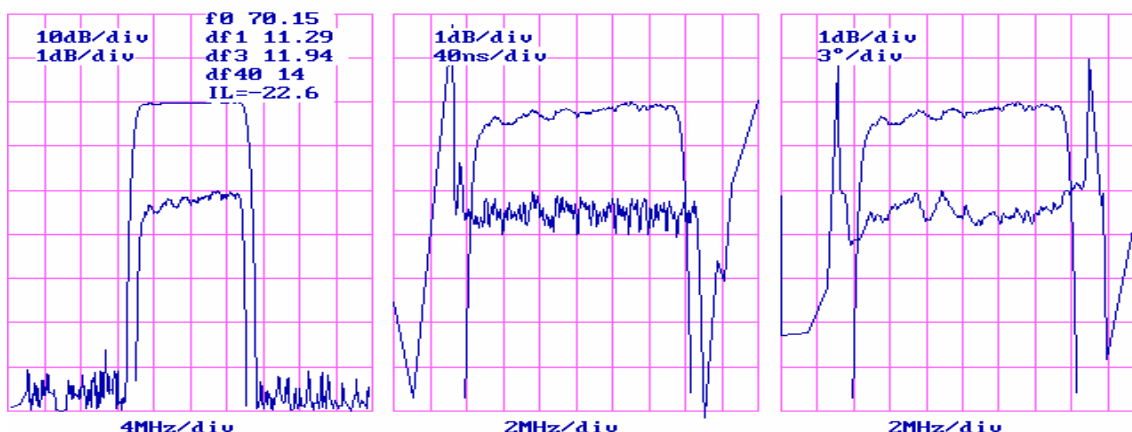

Package Outline
Matching Configuration

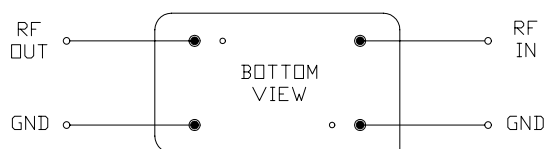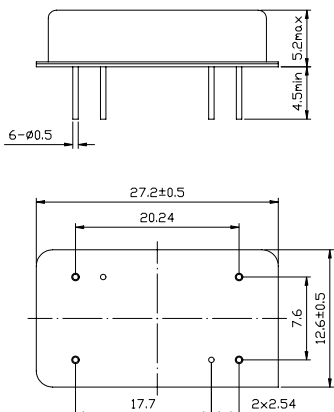

No Matching Required
Nominal Source/Load Impedance : 50 Ω