


# 70 MHz Bandpass SAW Filter

9 MHz Bandwidth



## BP60210

Specifications					
Parameter	Sym	Minimum	Typical	Maximum	Unit
Center Frequency at 25°C	fc	69.88	70	70.12	MHz
Insertion Loss at fc	IL	-	24.3	25.0	dB
1 dB Bandwidth	BW <sub>1</sub>	8.6	8.8	-	MHz
3 dB Bandwidth	BW <sub>3</sub>	9.0	9.3	-	MHz
40dB Bandwidth	BW <sub>40</sub>	-	11.3	11.7	MHz
Passband Variation	-	-	0.3	0.8	dB
Phase Linearity	-	-	2.1	4.0	Deg
Group Delay Variation	-	-	40	60	nsec
Absolute Delay	-	-	2.1	-	μsec
Ultimate Rejection	-	50	60	-	dB
Substrate Material	-	-	YZ-LiNbO <sub>3</sub>	-	-
Ambient Temperature	Ta	-	25	-	°C
Operating Temperature Range	To	-55	25	85	°C

### Typical Performance

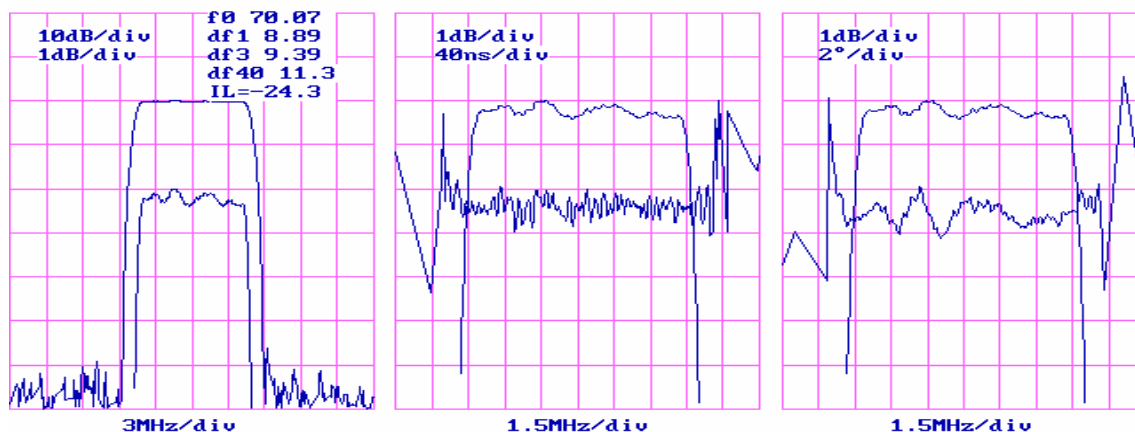

### Package Outline      Matching Configuration

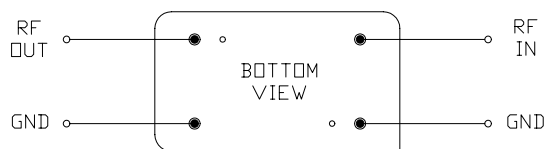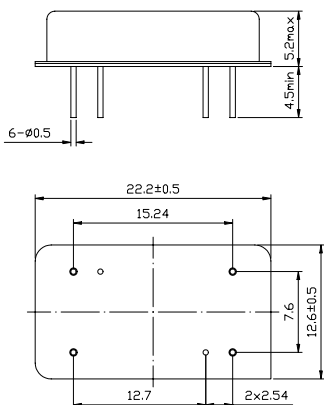

No Matching Required  
Nominal Source/Load Impedance : 50 Ω