


70 MHz Bandpass SAW Filter

1.50 MHz Bandwidth


BP60650

Specifications					
Parameter	Sym	Minimum	Typical	Maximum	Unit
Center Frequency at 25°C	fc	69.9	70	70.1	MHz
Insertion Loss at fc	IL	-	21.05	25.0	dB
1 dB Bandwidth	BW ₁	1.23	1.33	-	MHz
3 dB Bandwidth	BW ₃	1.50	1.72	-	MHz
40dB Bandwidth	BW ₄₀	-	3.35	3.80	MHz
Passband Variation	-	-	0.2	0.6	dB
Absolute Delay	-	-	1.88	2	μsec
Ultimate Rejection	-	50	55	-	dB
Substrate Material	-	-	Quartz	-	-
Ambient Temperature	Ta	-	25	-	°C
Operating Temperature Range	To	-55	25	85	°C


Typical Performance

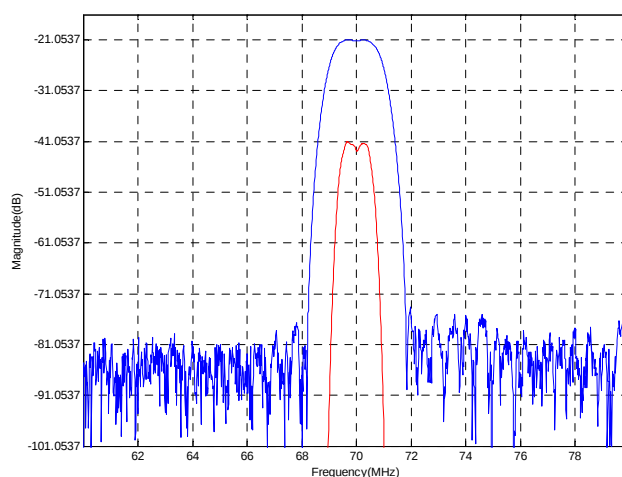

Package Outline

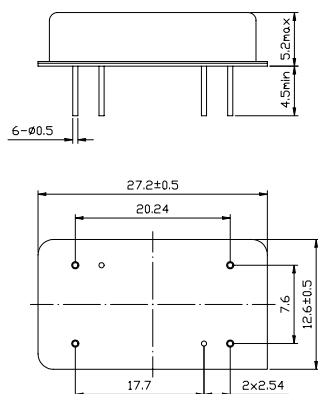

Matching Configuration

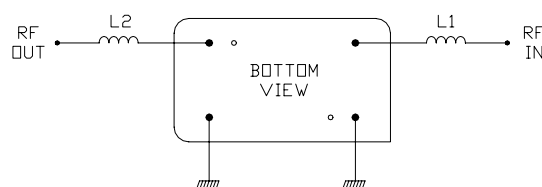

L1 : 470 nH

L3 : 470 nH

Nominal Source/Load Impedance : 50 Ω