

Model NO.	BPHE005C701	Model Name	LED Driver
Part NO.	PLKBPHE005C701	SIZE	66.5mm * 35mm * 23.5mm

FEATURES

- ◆ AC Input 100~240Vac
- ◆ Protection: SCP / OTP / OVP
- ◆ High Operating ambient Temp: -20℃ ~ +60℃
- ◆ Safety: UL / TUV / PSE
- ◆ EMC: CE
- ◆ Comply with Indoor/Outdoor Waterproof (IP 67)
- ◆ Dimension (mm): L*W*H: 66.5mm * 35mm * 23.5mm
- ◆ ROHS



Module : BPHE005C701		*,# =SEE NOTES BELOW		
*(8)	SPECIFICATION	MODEL BPHE005C701		
		min.	norm.	max.
	DC OUTPUT VOLTAGE (V)		7	
*	PRESET ACCURACY (%) *(7)		10	
*	OUTPUT CURRENT(A) *(5)		0.7	
*	O/P NOISE (P-P, V) *(3)			0.25
*	LINE REGULATION (%) *(6)		10	
	DC OUTPUT POWER	4.9 W		
	EFFICIENCY(typ @Full Load)	64%		
	SETUP, Softstart	3200ms,2000ms at full load 115VAC/230VAC		
	INPUT VOLTAGE RANGE	90-264VAC, 127-373VDC, Normal : 100-240VAC		
	INPUT FREQUENCY	Range:47-63Hz, Normal : 50-60Hz		
	INRUSH CURRENT (typ)	COLD START 30A @ 240VAC		
	AC CURRENT	0.18A/110VAC		
	LEAKAGE CURRENT	<0.7mA/264VAC		
	SHORT CIRCUIT PROTECTION	SCP, OTP, OVP will restart automatically after the fault condition is removed		
	OVER TEMP. PROTECTION			
	OVER V, PROTECTION			
*	OPERATING TEMP.*(4)	-20 to +60℃ @full load		
	STORAGE TEMPERATURE	-40 to +80℃		
	RELATIVE HUMIDITY	10 to +95%		
	TEMP. COEFFICIENT	0.03% / °C (0-50℃, typ)		
	SAFETY	UL1310 / TUV EN 61347-2-13 / PSE		
	EMI	CE EN55022		
	DIMENSIONS	66.5mm * 35mm * 23.5mm (L*W*H)		

NOTES : (1)All parameters not specially mentioned are measured 230VAC input.

(2)All specifications Typical @25℃, unless otherwise noted, at normal line and load.

(3)Ripple and Noise measured directly at pins/terminals at nom. load, @20MHz bandwidth.

(4)Specified for free-air convection cooling.

(5)Minimum load is NOT required for proper operation .


(6)Line regulation measured from 100VAC to 240VAC.

(7)Preset accuracy measured at normal load, 120VAC input.

(8)100% Production Tested.

Model NO.	BPHE005C701	Model Name	LED Driver
Part NO.	PLKBPHE005C701	SIZE	66.5mm * 35mm * 23.5mm

Dimensions

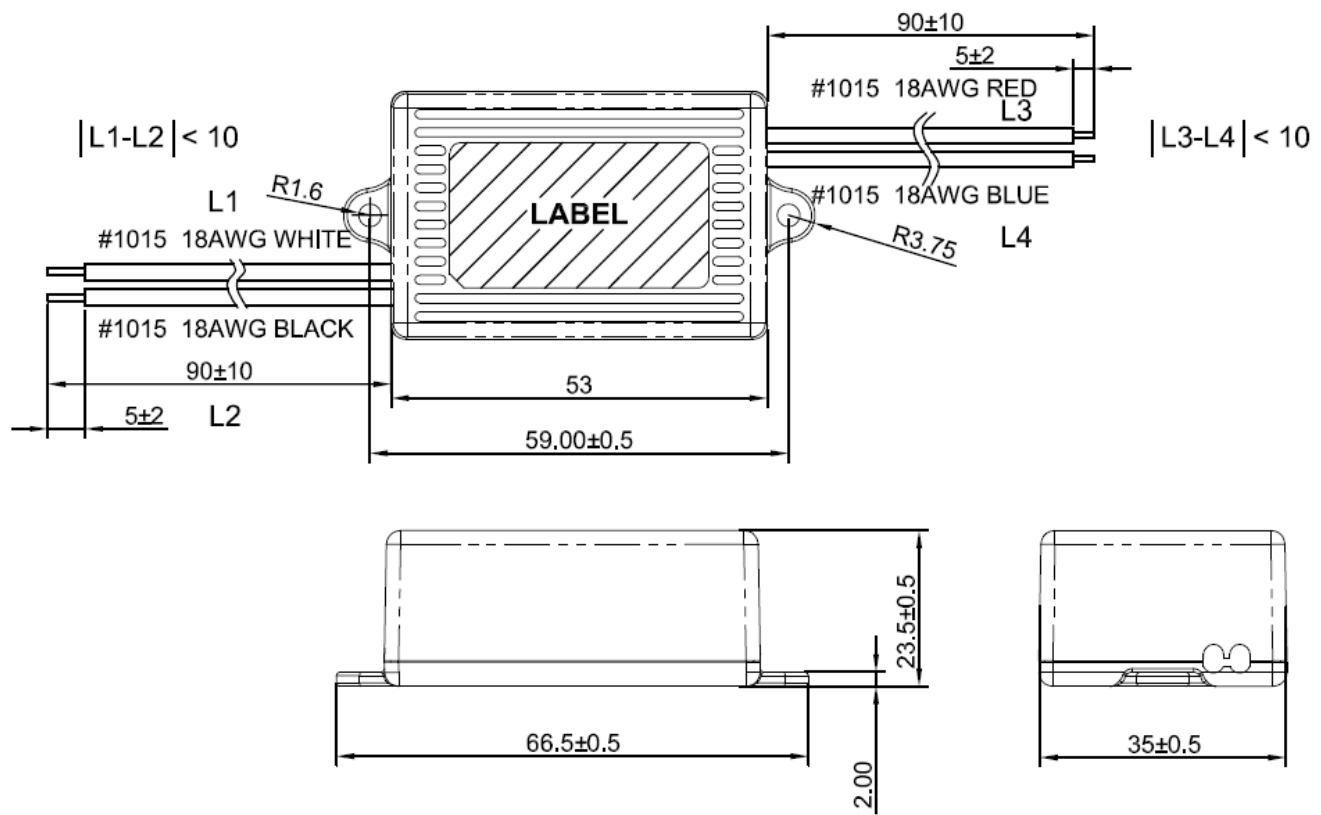

Unit : mm

※Reference