

BIAS Standby Supply Module BPS200 Series

The BPS200 Standby Power Supply Module is an ideal replacement for current standby power applications in appliances and consumer electronics. This low-cost supply provides up to two watt of output power, nominal output of 6, 12 or 14 VDC (V_o), and an additional regulated output of 3.3, 5.0 or 12.0 VDC (V_r) to maintain standby functions such as powering an LED, microprocessor or remote control sensor. Incorporating a custom integrated circuit into a small package, the BIAS Standby Module provides an immediate “drop-in” solution, requiring no additional external components.

Features

- Low Cost
- Single Component Solution
- Quick Time-To-Market
- Universal Input (85 to 265 VAC)
- Small Size

Operating Specifications

(@120VAC / 60 Hz / 25°C / 12VDC V_o unless otherwise specified)

Electrical

Input Voltage Range	85 to 265 VAC (50/60Hz)
Output Power	2.0 W max
Efficiency	70% nom.
Output (V_o)	6, 12, 14 VDC nom.
Regulation V_o	+/- 5% (options B, C)
Ripple V_o (@120 Hz)	1V
Regulated Output (V_r)	3.3, 5.0, 12.0 VDC (option C)
Regulation V_r	+/- 0.1% (option C)
Ripple V_r (@120 Hz)	30 mV (option C)
No-load Consumption	20 mW typical
Isolation	3000 VAC

Thermal

Operating Temperature	-10 to 85° C
Operating Relative Humidity	20 – 90% RH
Storage Temperature	-40 to 105° C

Mechanical

Package Size (L x W x H)	TBD
-----------------------------	-----


Safety

Safety Compliance ¹	UL1950 / EN60950 (VDE)
EMI Emissions ¹	EN 55011 / FCC Part 15-B
EFT/B Compliance ¹	IEC 1000-4-4 Level 4 ²

¹ Certification pending


Specifications subject to change

² Utilizing external TVS device

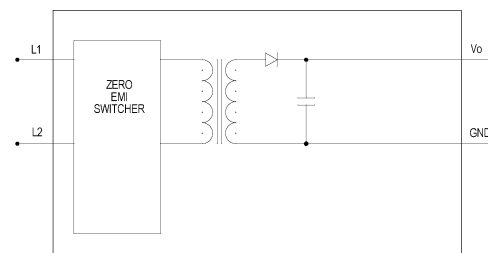


Option A: Constant Power

Lowest cost solution, best applied in constant load applications.

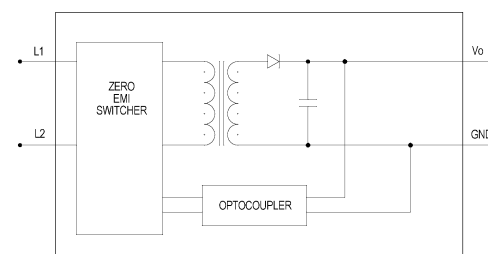

Option B: Demand Power

Designed for variable or intermittent load applications. Power is available upon demand and adjustable up to two watts.

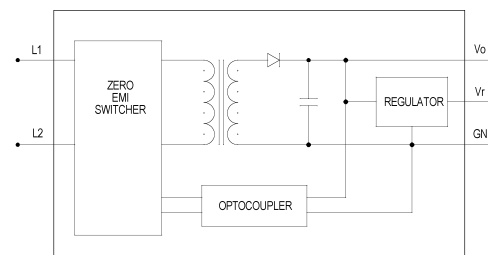

Option C: Demand Power with Voltage Regulation

Provides dual isolated outputs for applications requiring a regulated output ($V_r \pm 0.1\%$) in addition to the standard unregulated output.



Part Number Designation


Model	Series	Power Configuration	Vo Output	Vr Reg. Output	Option
BPS: Standby Power Module	200: 2 Watt	A: Constant Power B: Demand Power C: Demand Power with Regulation	06: 6 VDC 12: 12 VDC 14: 14 VDC	00: N/A 33: 3.3 VDC 50: 5.0 VDC 12: 12.0 VDC	

Ex: **BPS200C-1250**: standby module, 2W series with demand power adjustable up to 2W, Vo = 12V, Vr = 5.0V regulated

Part Number	Power Configuration	Vo	Vr	Option
BPS200A-0600	Constant Power	6 VDC	N/A	
BPS200A-1200		12 VDC		
BPS200A-1400		14 VDC		
BPS200B-0600	Demand Power	6 VDC	N/A	
BPS200B-1200		12 VDC		
BPS200B-1400		14 VDC		
BPS200C-0633	Demand Power with Regulation	6 VDC	3.3 VDC	
BPS200C-0650		6 VDC	5.0 VDC	
BPS200C-1250		12 VDC	5.0 VDC	
BPS200C-1412		14 VDC	12 VDC	

Custom configurations available; contact BIAS Power Technology for specific applications

Efficiency Characteristics of Regulation

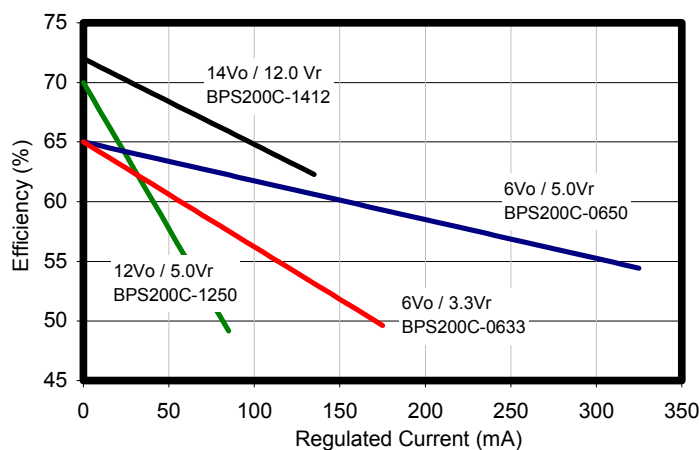

Package Dimensions

Regulation Operating Range

