

# BRIGHT LED ELECTRONICS CORP.

## LED DISPLAY SPECIFICATION

● COMMODITY : 0.52"(13.20mm) FOUR DIGIT LED DISPLAYS

● DEVICE NUMBER : BQ-A536RD

VERSION : 1.0 / 1999.07.27


● ELECTRICAL AND OPTICAL CHARACTERISTICS (Ta=25°C)

| Chip          |                                  | Absolute Maximum Rating |         |         |             | Electro-optical Data (At 10mA) |               | Surface Color | Segment Color |       |
|---------------|----------------------------------|-------------------------|---------|---------|-------------|--------------------------------|---------------|---------------|---------------|-------|
| Emitted Color | Peak Wave Length $\lambda$ P(nm) | $\Delta \lambda$ (nm)   | Pd (mW) | If (mA) | Peak If(mA) | Vf(V)                          | Iv Typ. (mcd) |               |               |       |
|               |                                  | Typ.                    | Max.    |         |             |                                |               |               |               |       |
| Super Red     | 660                              | 20                      | 60      | 30      | 150         | 1.7                            | 2.5           | 5.0           | Black         | White |

● ABSOLUTE MAXIMUM RATINGS (Ta=25°C)


Reverse Voltage ..... 5V  
 Reverse Current (-Vr=5V) ..... 50μA  
 Operating Temperature Range ..... -40°C ~ 80°C  
 Storage Temperature Range ..... -40°C ~ 85°C  
 Lead Soldering Temperature (1/16" From Body)..... 260°C For 5 Seconds

PACKAGE DIMENSIONS:

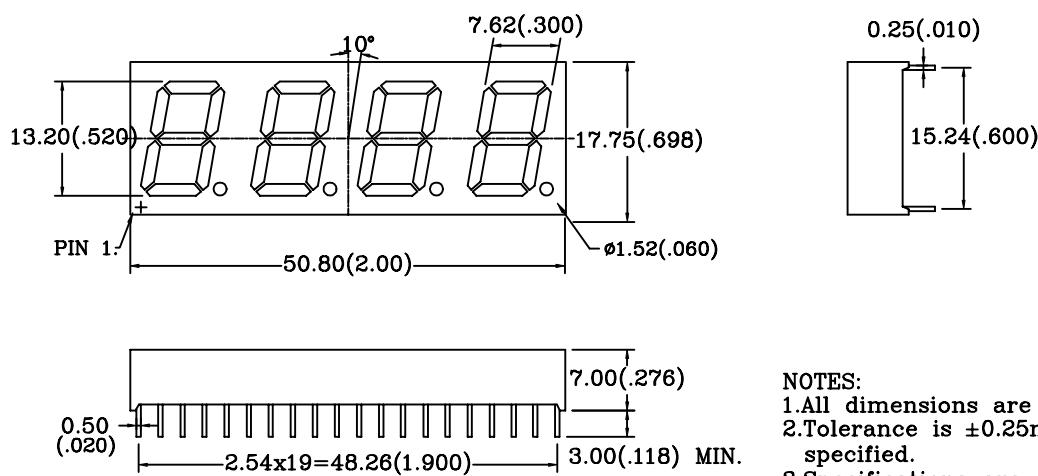

NOTES:  
 1. All dimensions are in millimeters(inches).  
 2. Tolerance is  $\pm 0.25\text{mm}(.01")$  unless otherwise specified.  
 3. Specifications are subject to change without notice.

PIN FUNCTIONS:

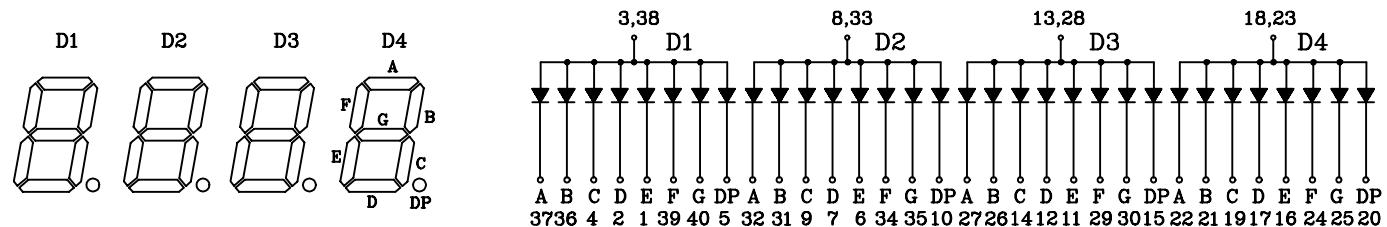

RELEASED:

曾志宏  
2001.02.16

ENGINEER:

余愛萍  
2001.02.16