

# BRIGHT LED ELECTRONICS CORP.

## LED DISPLAY SPECIFICATION

●COMMODITY：0.56”(14.20mm) FOUR DIGIT LED DISPLAY

●DEVICE NUMBER：BQ-N 516RD

VERSION：1.0 / 2001.04.19


●ELECTRICAL AND OPTICAL CHARACTERISTICS (Ta=25℃)

| Chip             |                                            | Absolute Maximum<br>Rating |            |            |                | Electro-optical<br>Data (At 10mA) |     |                  | Surface<br>Color | Segment<br>Color |
|------------------|--------------------------------------------|----------------------------|------------|------------|----------------|-----------------------------------|-----|------------------|------------------|------------------|
| Emitted<br>Color | Peak<br>Wave<br>Length<br>$\lambda_P$ (nm) |                            |            |            |                |                                   |     |                  |                  |                  |
|                  |                                            | $\Delta \lambda$<br>(nm)   | Pd<br>(mW) | If<br>(mA) | Peak<br>If(mA) | Vf(V)                             |     | Iv Typ.<br>(mcd) |                  |                  |
| Typ.             | Max.                                       |                            |            |            |                |                                   |     |                  |                  |                  |
| Super Red        | 660                                        | 20                         | 80         | 30         | 150            | 1.7                               | 2.5 | 6.5              | Black            | White            |


●ABSOLUTE MAXIMUM RATINGS (Ta=25℃)

|                                                   |                    |
|---------------------------------------------------|--------------------|
| Reverse Voltage .....                             | 5V                 |
| Reverse Current ( $V_R=5V$ ) .....                | 100 $\mu$ A        |
| Operating Temperature Range .....                 | -40℃ ~ 80℃         |
| Storage Temperature Range .....                   | -40℃ ~ 85℃         |
| Lead Soldering Temperature (1/16” From Body)..... | 260℃ For 5 Seconds |

### PACKAGE DIMMENSIONS:

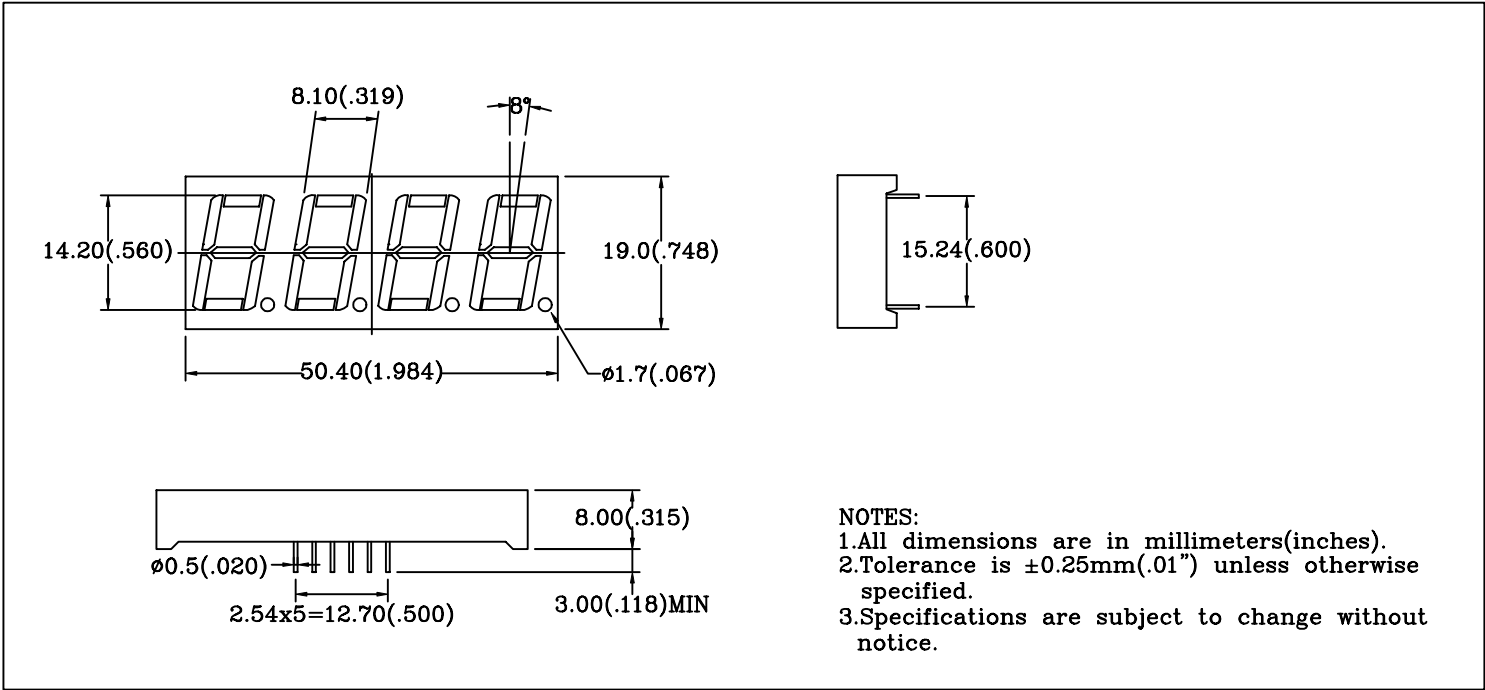

### PIN FUNCTIONS:

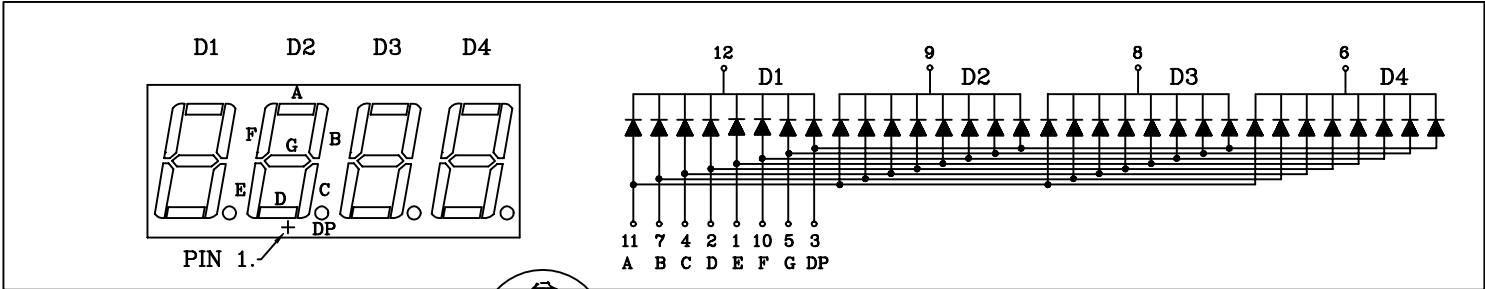

RELEASED:








ENGINEER:



# BRIGHT LED ELECTRONICS CORP.

## TYPICAL CHARACTERISTICS

DEVICE NUMBER:BQ-N516RD

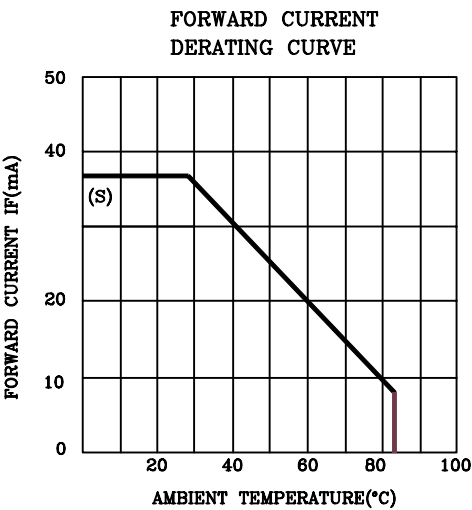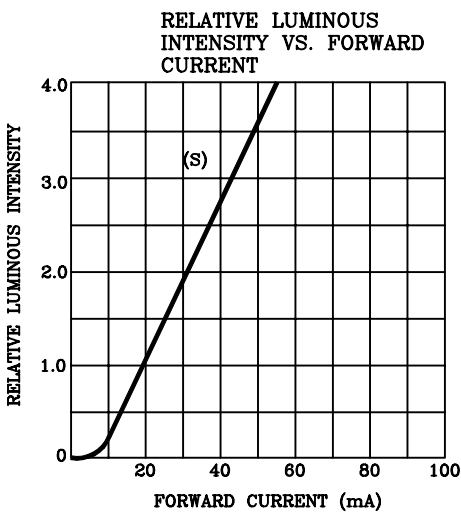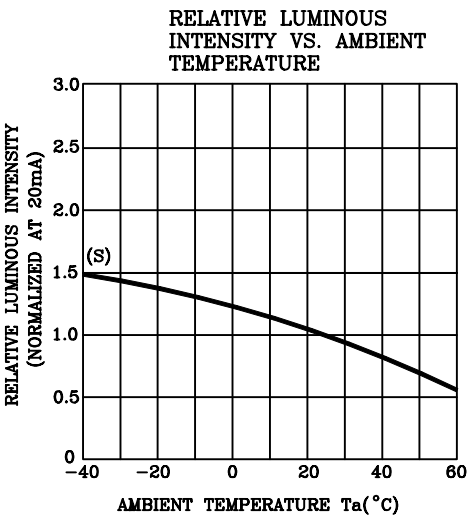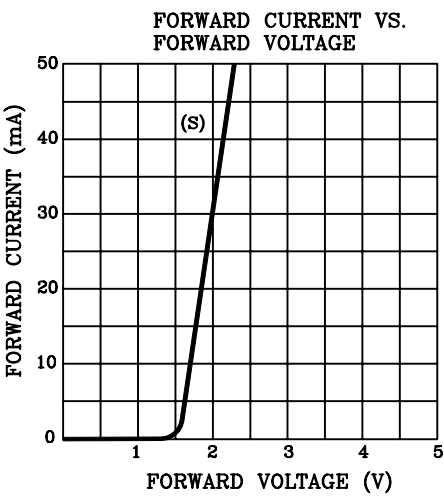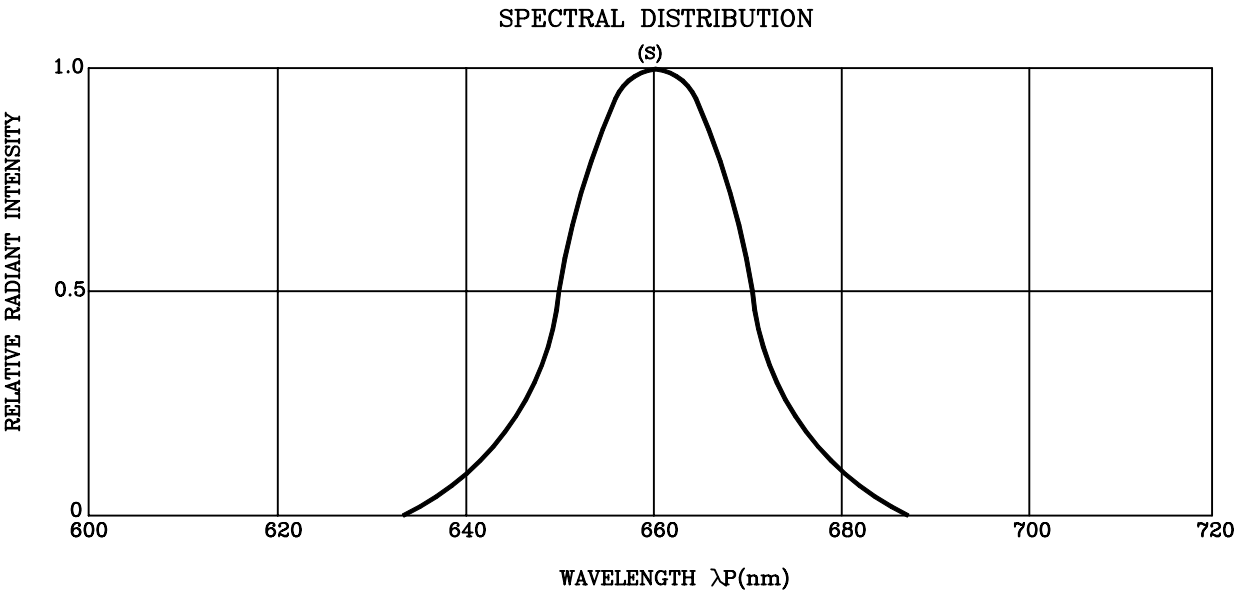

# RELIABILITY TEST

DEVICE NO.: BQ-N516RD

| Classification     | Test Item                                    | Reference Standard                                                          | Test Conditions                                                                                | Result |
|--------------------|----------------------------------------------|-----------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|--------|
| Endurance Test     | Operation Life                               | MIL-STD-750:1026<br>MIL-STD-883:1005<br>JIS C 7021 :B-1                     | Connect with a power If=30mA<br>Ta=Under room temperature<br>Test time=1,000hrs(-24hrs,+72hrs) | 0/10   |
|                    | High Temperature<br>High Humidity<br>Storage | MIL-STD-202:103B<br>JIS C 7021 :B-11                                        | Ta=65°C ± 5°C<br>RH=90%-95%<br>Test time=240hrs±2hrs                                           | 0/10   |
|                    | High Temperature<br>Storage                  | MIL-STD-883:1008<br>JIS C 7021 :B-10                                        | High Ta=85°C ± 5°C<br>Test time=1,000hrs(-24hrs,+72hrs)                                        | 0/10   |
|                    | Low Temperature<br>Storage                   | JIS-C-7021 :B-12                                                            | Low Ta= -35°C ± 5°C<br>Test time=1,000hrs(-24hrs,+72hrs)                                       | 0/10   |
| Environmental Test | Temperature Cycling                          | MIL-STD-202:107D<br>MIL-STD-750:1051<br>MIL-STD-883:1010<br>JIS C 7021 :A-4 | -35°C ~ 25°C ~ 85°C ~ 25°C<br>30min 5min 30min 5min<br>Test Time=10cycle                       | 0/10   |
|                    | Thermal Shock                                | MIL-STD-202:107D<br>MIL-STD-750:1051<br>MIL-STD-883:1011                    | 85°C ± 5°C ~ -35°C ± 5°C<br>10min 10min<br>Test Time=10cycle                                   | 0/10   |
|                    | Solder Resistance                            | MIL-STD-202:201A<br>MIL-STD-750:2031<br>JIS C 7021 :A-1                     | T.sol=260 ± 5°C<br>Dwell Time=10 ± 1 sec.                                                      | 0/10   |
|                    | Solderability                                | MIL-STD-202:208D<br>MIL-STD-750:2026<br>MIL-STD-883:2003<br>JIS C 7021 :A-2 | T.sol=230 ± 5°C<br>Dwell Time=5 ± 1 sec.                                                       | 0/10   |

## JUDGMENT CRITERIA OF FAILURE FOR THE RELIABILITY

| Measuring items    | Symbol | Measuring conditions | Judgement criteria for failure |
|--------------------|--------|----------------------|--------------------------------|
| Forward voltage    | VF     | IF=10mA              | Over Ux1.2                     |
| Reverse current    | IR     | VR=5V                | Over Ux2                       |
| Luminous intensity | IV     | IF=10mA              | Below Sx0.5                    |

Note: 1.U means the upper limit of specified characteristics. S means initial value.

2.Measurment shall be taken between 2 hours and after the test pieces have been returned to normal ambient conditions after completion of each test.