


ENERGIZER NO. BR2325

LITHIUM COIN



Industry Standard Dimensions


(mm)

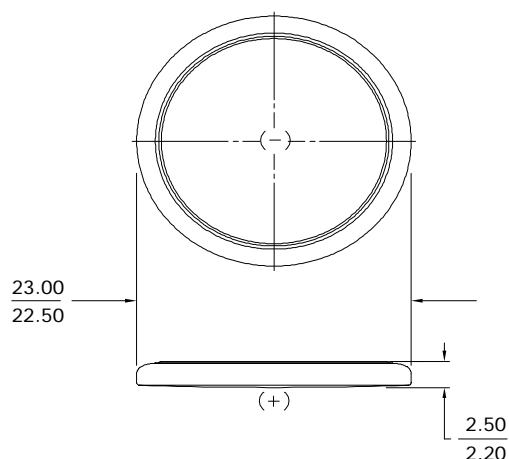

Specifications


Classification:	"Lithium Coin"
Chemical System:	Lithium / Poly-Carbon Monofluoride (Li/CFx)
Designation:	IEC-BR2325
Nominal Voltage:	3.0 Volts
Typical Capacity:	165 mAh (to 2.0 volts) (Rated at 15K ohms at 21°C)
Typical Weight:	3.0 grams
Typical Volume:	1.0 cubic centimeters
Max Rev Charge:	1 microampere
Energy Density:	160 milliwatt hr/g, 479 milliwatt hr/cc
Shipping:	For complete details, please reference: Special Provision A45 of the International Air Transport Association Dangerous Goods Regulations

Cross Section

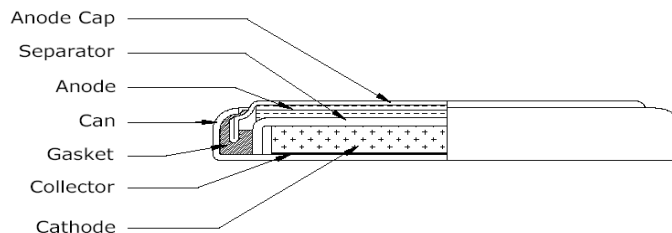

Typical Discharge Characteristics

Load: 15K ohms - Continuous
Typical Drain @ 2.7V: 0.186 mA

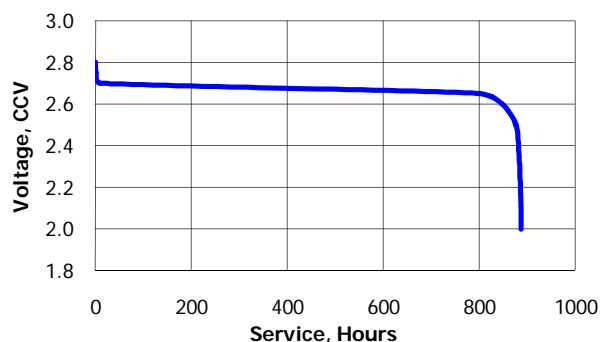

Simulated Application test

Typical Performance at 21°C (70°F)

Schedule:	Typical Drains: at 2.7V (mA)	Load (ohms)	Cutoff 2.0V (hours)
Continuous	0.186	15,000	887

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.