

Chimei-Innolux Corporation

BT140GW02 V.9 LCD MODULE SPECIFICATION

- () Preliminary Specification
() Final Specification

| | |
|----------|-----------------------|
| Customer | Checked & Approved by |
| ASUS | |

| | | |
|-------------|------------|-------------|
| Approved by | Checked by | Prepared by |
| MKT | PD | PM |
| 楊竣傑 | 柯瑞峰 詹銘斯 | 陳郁甫 |

Date: 2011/05/06

Chimei-Innolux Corporation

No.160 Kesyue Rd., Chu-Nan Site, Hsinchu Science Park,

Chu-Nan 350, Miao-Li County, Taiwan

Tel: 886-37-586000

Fax: 886-37-586060

Record of Revision

| Version | Revise Date | Page | Content |
|---------|-------------|----------|------------------------------|
| 0 | 2010/05/13 | All | First Edition issued |
| 1 | 2010/05/19 | 22 | Label |
| 2 | 2010/10/08 | 16 | OPT Spec |
| | | 21,22 | Label drawing |
| | | 23 | Package Drawing |
| | | 25,26 | Label position |
| | | 27 | EDID code |
| 3 | 2010/10/19 | 5,6 | Modify LVDS connector source |
| 4 | 2011/05/06 | 21,22,26 | Label Logo |
| | | | |
| | | | |
| | | | |
| | | | |

| Contents: | Page |
|---------------------------------------|-------------|
| 1. General Specifications | 2 |
| 2. Electrical Specifications | |
| 2-1 Pin Assignment | 3 |
| 2-2 Absolute Maximum Ratings | 5 |
| 2-3 Electrical Characteristics | 6 |
| 3. Optical Specifications | 14 |
| 4. Reliability Test Items | 17 |
| 5. Safety | 18 |
| 6. Display Quality | 18 |
| 7. Handling Precaution | 18 |
| 8. Label Definition | 19 |
| 9. Packing Form | 21 |
| 10. Mechanical Drawings | 22 |
| 11. System Cover Design Notice | 24 |
| Appendix | 25 |

1. General Specifications

| NO. | Item | Specification | Unit |
|------------|----------------------------|----------------------------------|-------------|
| 1 | Display resolution (pixel) | 1366(H) X 768(V), HD resolution | |
| 2 | Active area | 309.40(H) X 173.95(V) | mm |
| 3 | Screen size | 14.0 inches diagonal | Inches |
| 4 | Pixel pitch | 0.2265(H) X 0.2265(V) | mm |
| 5 | Color configuration | Stripe | |
| 6 | Overall dimension | 324(W) X 192.5(H) X 5.2(D) (max) | mm |
| 7 | Weight | 350Max. | Grams |
| 8 | Surface treatment | Anti Glare | |
| 9 | Input color signal | 6 bit LVDS | |
| 10 | Display colors | 262K (6 bit) | |
| 11 | Optimum viewing direction | 6 o'clock | |
| 12 | Backlight | W-LED | |
| 13 | Glass thickness | 0.5 | mm |
| 14 | LED life time with LCM | 12,000 (min.), T = 25°C | Hours |
| 15 | RoHS | RoHS compliance | |

2. Electrical Specifications

2-1 Pin Assignment



a. Panel connector

Connector Part No: GS13401-1110S (Foxconn) & 20455-040E-12 (I-PEX)

User's connector Part No: 20453-040T-12(I-PEX) or equivalent

| Pin No | Symbol | Description | Remark |
|--------|----------------------|--------------------------|----------------------|
| 1 | NC | No connection (Reserve) | |
| 2 | V _{CC} | Power Supply (+3.3V) | |
| 3 | V _{CC} | Power Supply (+3.3V) | |
| 4 | V _{EDID} | DDC Power +3.3V | |
| 5 | NC | No connection (Reserve) | |
| 6 | CLK _{EDID} | DDC Clock | |
| 7 | DATA _{EDID} | DDC Data | |
| 8 | Rxin0- | Differential Data Input | R0~R5,G0 |
| 9 | Rxin0+ | Differential Data Input | |
| 10 | GND | Ground | |
| 11 | Rxin1- | Differential Data Input | G1~G5,B0,B1 |
| 12 | Rxin1+ | Differential Data Input | |
| 13 | GND | Ground | |
| 14 | Rxin2- | Differential Data Input | B2~B5,DE,Hsync,Vsync |
| 15 | Rxin2+ | Differential Data Input | |
| 16 | GND | Ground | |
| 17 | CLK- | Differential Clock Input | |
| 18 | CLK+ | Differential Clock Input | |
| 19 | GND | Ground | |
| 20 | NC | No connection (Reserve) | |
| 21 | NC | No connection (Reserve) | |
| 22 | GND | Ground | |
| 23 | NC | No connection (Reserve) | |
| 24 | NC | No connection (Reserve) | |
| 25 | GND | Ground | |
| 26 | NC | No connection (Reserve) | |
| 27 | NC | No connection (Reserve) | |
| 28 | GND | Ground | |
| 29 | NC | No connection (Reserve) | |
| 30 | NC | No connection (Reserve) | |
| 31 | LED_GND | LED Ground | |
| 32 | LED_GND | LED Ground | |
| 33 | LED_GND | LED Ground | |
| 34 | NC | No connection (Reserve) | |
| 35 | LED_PWM | PWM dimming signal input | |
| 36 | LED_EN | LED enable pin (3.3V) | |
| 37 | NC | No connection (Reserve) | |
| 38 | V_LED | LED power supply 6V~21V | |
| 39 | V_LED | LED power supply 6V~21V | |
| 40 | V_LED | LED power supply 6V~21V | |

b. General block diagram (Rear-side)

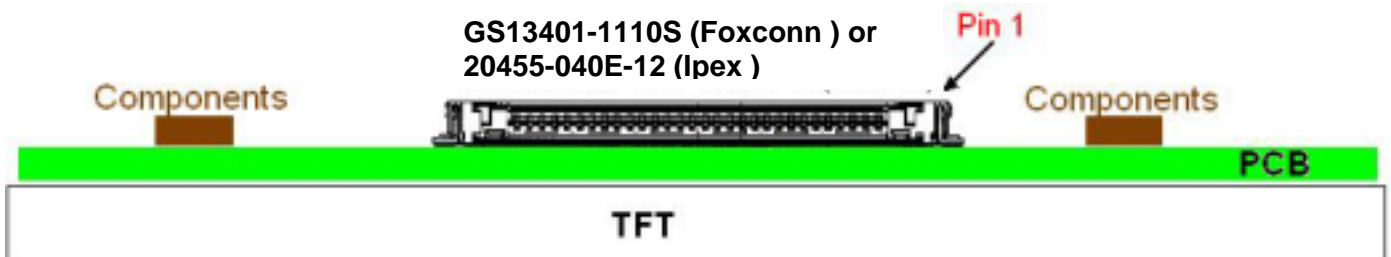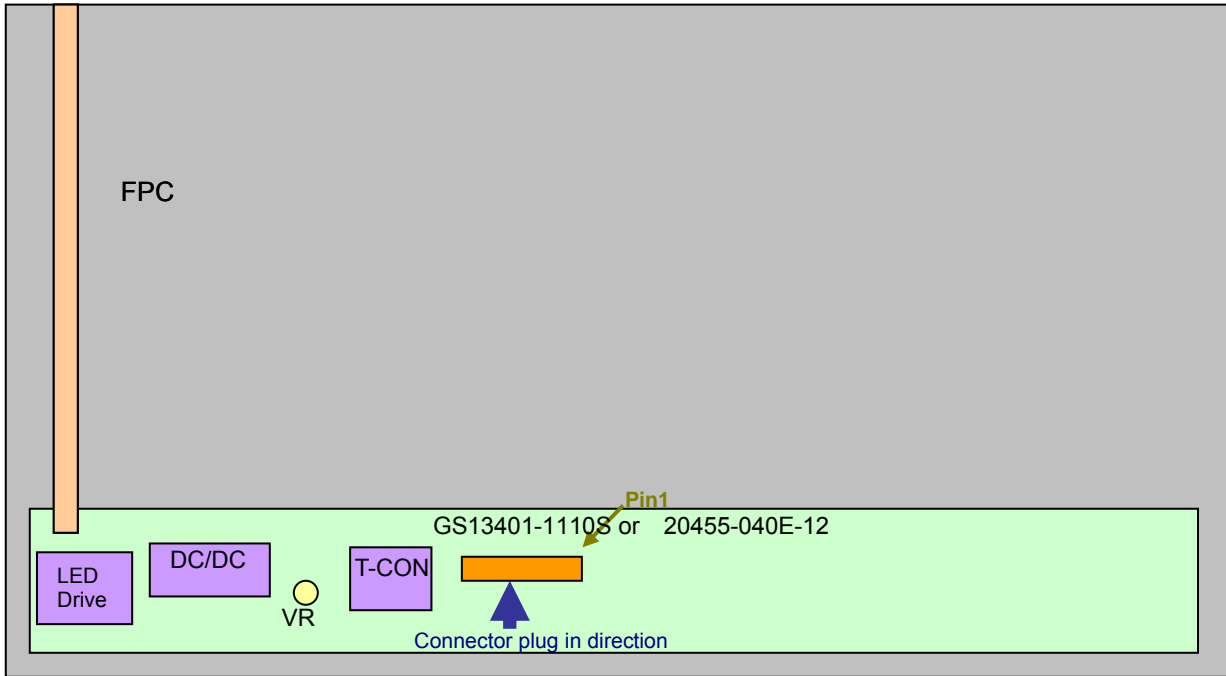


2-2. Absolute Maximum Ratings

| Parameter | Symbol | Values | | Unit | Remark |
|------------------------------|-----------|--------|------|--------|--------|
| | | Min. | Max. | | |
| Power input voltage | V_{CC} | - 0.3 | 4.0 | V | At 25 |
| Signal input voltage | V_{IN} | - 0.3 | 4.0 | V | At 25 |
| LED input voltage | V_{LED} | - 0.3 | 30 | V | At 25 |
| Operating temperature | T_{OP} | 0 | 50 | | Note 1 |
| Storage temperature | T_{ST} | - 20 | 60 | | Note 2 |
| Re-screw | | - | 5 | Times | |
| Assured torque at side mount | | - | 2 | kgf.cm | |

Note 1: The relative humidity must not exceed 90%, non-condensing at temperatures of 40 °C or less. At temperatures greater than 40 °C, the wet bulb temperature must not exceed 39 °C.

Note 2: The unit should not be exposed to corrosive chemicals.

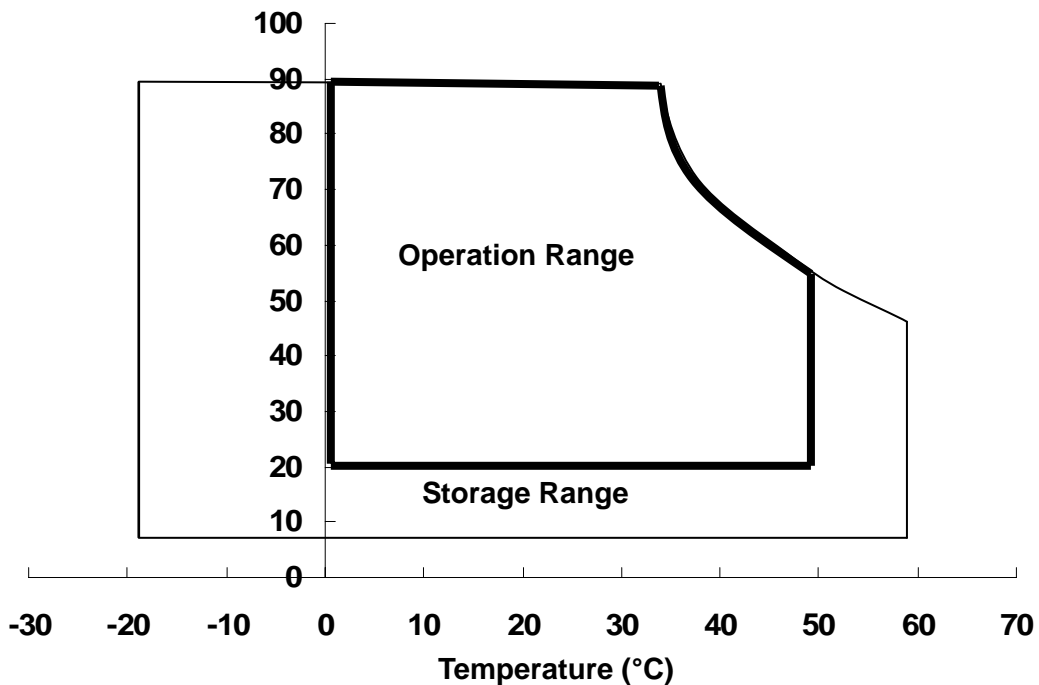Relative Humidity (%RH)


2-3. Electrical Characteristics

a. Typical operating conditions

| Item | Symbol | Min. | Typ. | Max. | Unit | Remark | |
|-------------------------------|---|------------|------|------|-------|--------|----------------|
| Power input voltage | V_{CC} | 3 | 3.3 | 3.6 | V | | |
| Permissive power input ripple | V_{RF} | - | - | 0.1 | V | | |
| Power input current | I_{CC} | - | 300 | 330 | mA | Note 1 | |
| Power consumption | P_C | - | | 1 | Watts | Note 1 | |
| LVDS interface | Differential input high threshold voltage | V_{LVTH} | - | - | +100 | mV | LVDS interface |
| | Differential input low threshold voltage | V_{LVTL} | -100 | - | - | mV | |
| | Common input voltage | V_{LVC} | 1.0 | 1.2 | 1.4 | V | |
| | Terminating resistor | R_T | 90 | 100 | 110 | ohm | |
| Rush current | I_{Rush} | - | - | 1.5 | A | Note 3 | |
| LED rush current | $I_{LED-Rush}$ | - | - | 3.0 | A | Note 4 | |


Note 1: The specified input current and power consumption are under the $V_{CC} = 3.3\text{ V}$, 25°C , $f_V = 60\text{ Hz}$ (frame frequency) condition whereas mosaic pattern is displayed.

Note 2: LVDS waveform diagram

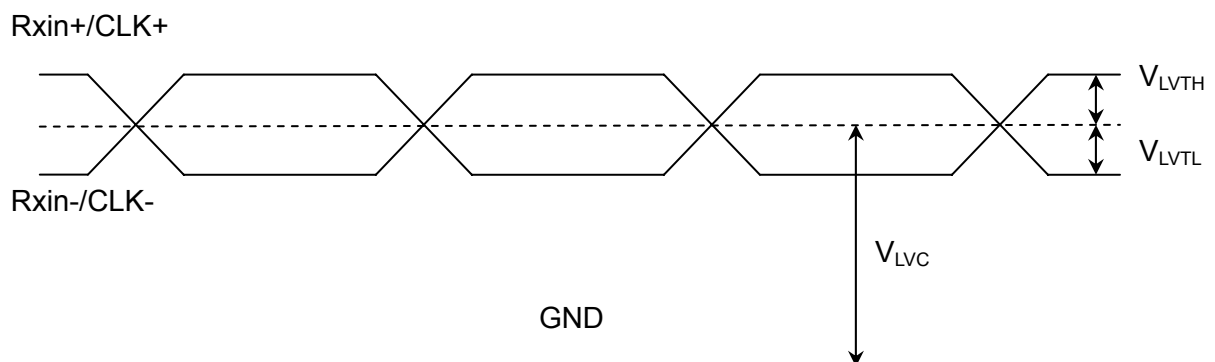


Note 3: Test condition

- (1) Pattern: Black pattern
- (2) $V_{CC} = 3.3\text{ V}$, V_{CC} rising time = $470\ \mu\text{s} \pm 10\%$

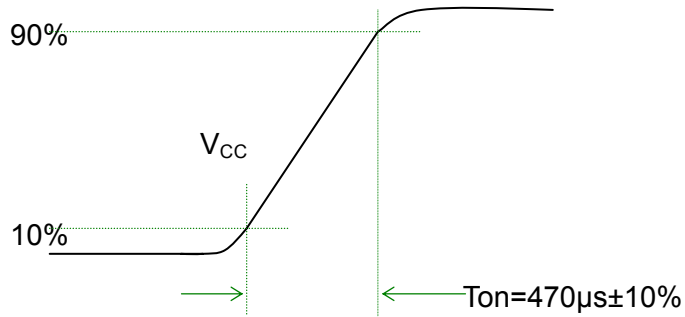


(3) Test circuit

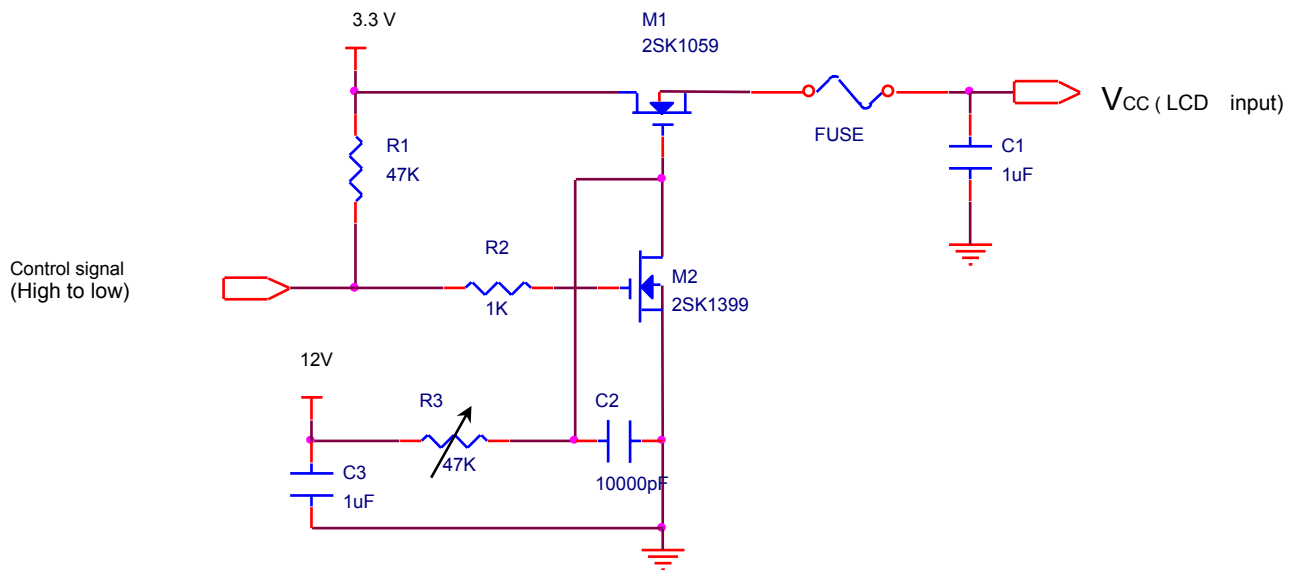


Note 4: Test condition


- (1) Pattern: LED duty 100%
- (2) $V_{LED} = 12.0V$, V_{LED} rising time = $470 \mu s \pm 10\%$

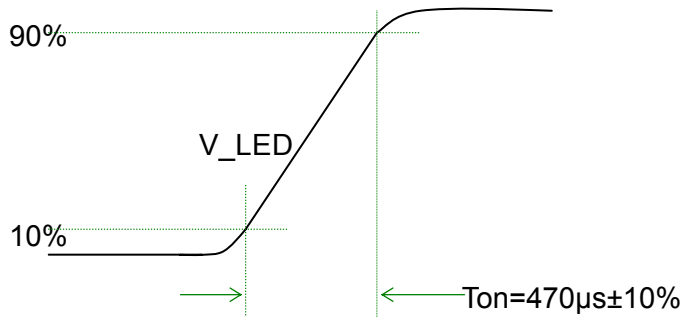

(3) Test circuit

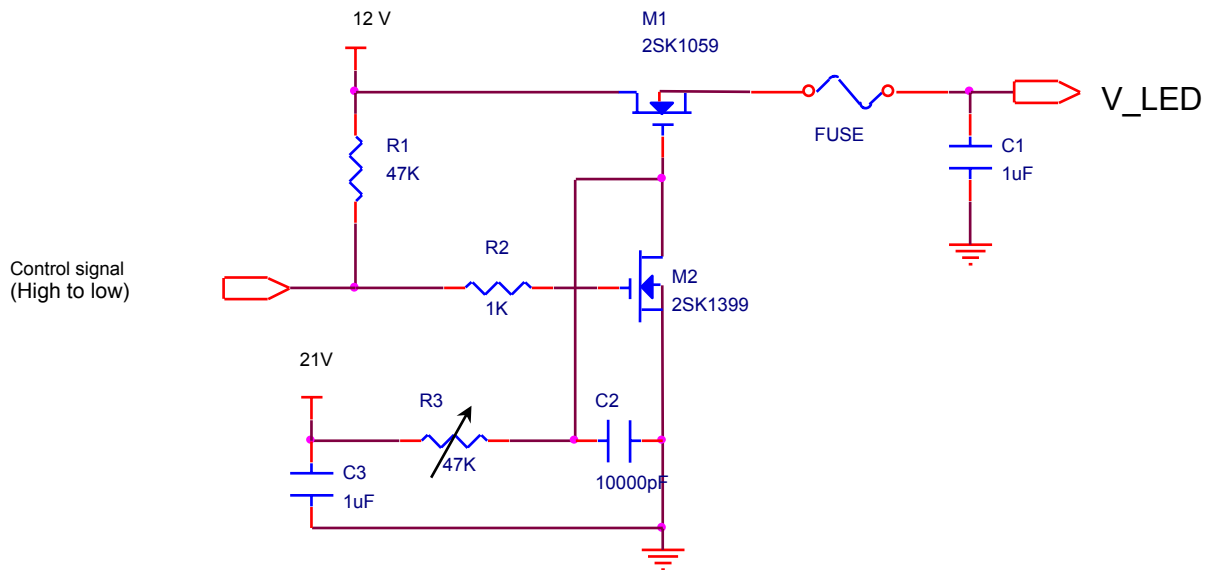

b. Power sequence

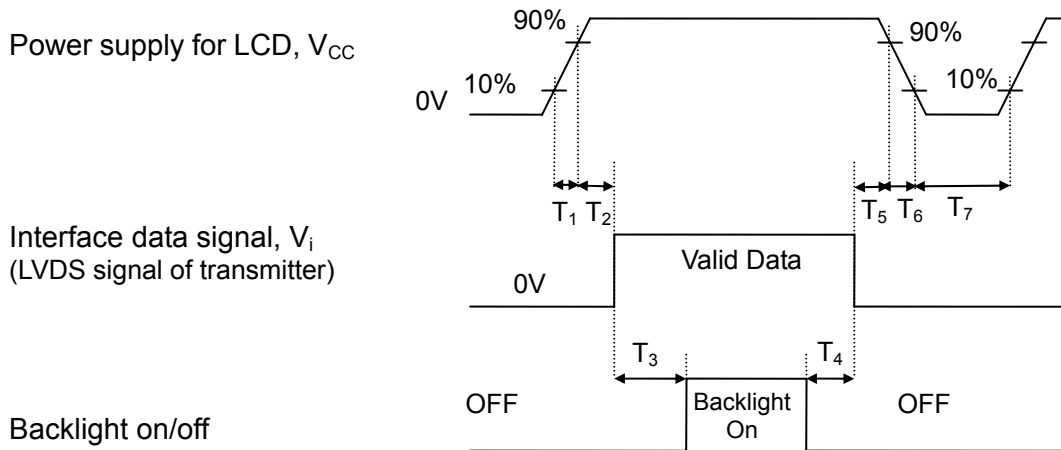


Power sequence timing table

| Parameter | Value | | | Units |
|-----------|-------|------|------|-------|
| | Min. | Typ. | Max. | |
| T_1 | 0.5 | - | 10 | ms |
| T_2 | 0 | - | 50 | ms |
| T_3 | 200 | - | - | ms |
| T_4 | 200 | - | - | ms |
| T_5 | 0 | - | 50 | ms |
| T_6 | 0.5 | - | 10 | ms |
| T_7 | 400 | - | - | ms |

c. Display color vs. input data signals

| Signal Name | Description | Remark |
|-------------|-------------------------|---|
| R5 | Red Data 5 (MSB) | Red-pixel data. Each red pixel's brightness data consists of these 6 bits pixel data. |
| R4 | Red Data 4 | |
| R3 | Red Data 3 | |
| R2 | Red Data 2 | |
| R1 | Red Data 1 | |
| R0 | Red Data 0 (LSB) | |
| | Red-pixel Data | |
| G5 | Green Data 5 (MSB) | Green-pixel data. Each green pixel's brightness data consists of these 6 bits pixel data. |
| G4 | Green Data 4 | |
| G3 | Green Data 3 | |
| G2 | Green Data 2 | |
| G1 | Green Data 1 | |
| G0 | Green Data 0 (LSB) | |
| | Green-pixel Data | |
| B5 | Blue Data 5 (MSB) | Blue-pixel data. Each blue pixel's brightness data consists of these 6 bits pixel data. |
| B4 | Blue Data 4 | |
| B3 | Blue Data 3 | |
| B2 | Blue Data 2 | |
| B1 | Blue Data 1 | |
| B0 | Blue Data 0 (LSB) | |
| | Blue-pixel Data | |

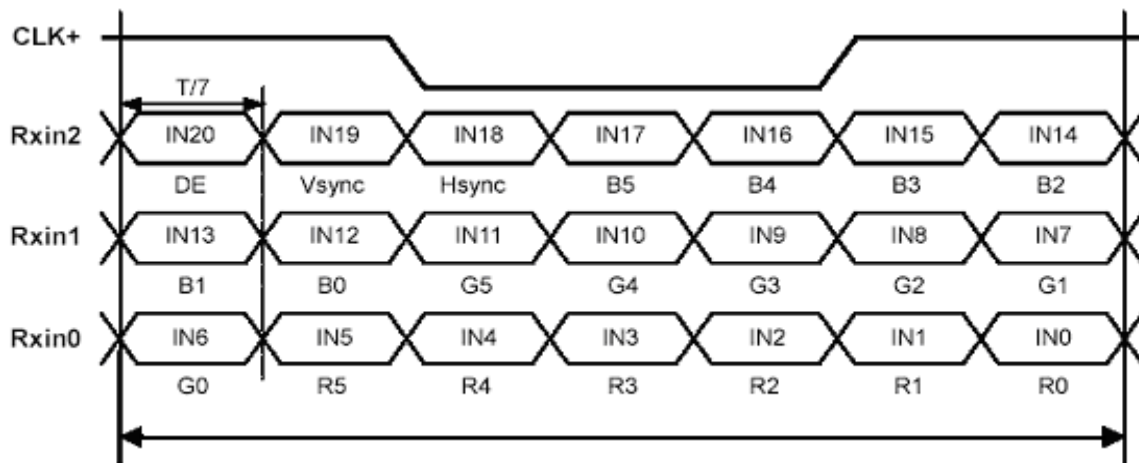


Signal for 1 DCLK cycle (t_{CLK})

d. Input signal timing

Timing table

| Description | Symbol | Min | Typ | Max | Unit |
|-------------------|-------------|------|------|------|-----------|
| Frame rate | -- | 40 | 60 | -- | Hz |
| Clock freq. | $1/t_{CLK}$ | 45 | 71 | 85 | MHz |
| Line cycle time | t_H | 1400 | 1498 | 1800 | t_{CLK} |
| Line width-active | t_{Hd} | 1366 | 1366 | 1366 | t_{CLK} |
| Frame cycle time | t_v | 780 | 790 | 900 | t_H |
| V width-active | t_{Vd} | 768 | 768 | 768 | t_H |

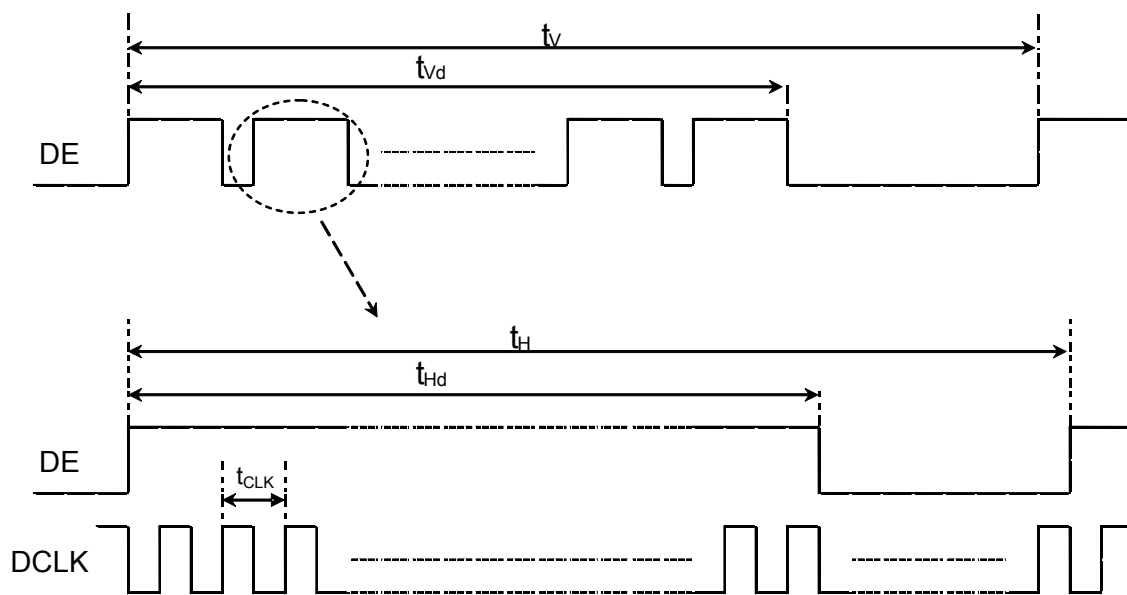

e. Display position

| | | | | | | |
|-----------|-----------|-------|-------------|-------|--------------|--------------|
| D(1, 1) | D(2, 1) | | D(683, 1) | | D(1365, 1) | D(1366, 1) |
| D(1, 2) | D(2, 2) | | D(683, 2) | | D(1365, 2) | D(1366, 2) |
| ⋮ | | | ⋮ | | ⋮ | ⋮ |
| D(1, 384) | D(2, 384) | | D(683, 384) | | D(1365, 384) | D(1366, 384) |
| ⋮ | | | ⋮ | | ⋮ | ⋮ |
| D(1, 767) | D(2, 767) | | D(683, 767) | | D(1365, 767) | D(1366, 767) |
| D(1, 768) | D(2, 768) | | D(683, 768) | | D(1365, 768) | D(1366, 768) |

f. Backlight driving conditions


| Parameter | Symbol | Min. | Typ. | Max. | Unit | Remark |
|--------------------------|-------------|--------|------|------|------------|-------------------|
| LED forward voltage | V_F | 3 | 3.2 | 3.4 | V_{rms} | T = 25°C |
| LED forward current | I_F | | 20 | | mA_{rms} | T = 25°C |
| LED power consumption | P_{LED} | | 2.8 | 3 | W | T = 25°C |
| | P_{LED-G} | | | 1.2 | W | Note 1 |
| Input PWM frequency | F_{PWM} | 190 | 1000 | 2000 | Hz | T = 25°C |
| Duty ratio | - | 5 | | 100 | % | Note 2 |
| LED life time (LED only) | - | 15,000 | | | Hr | T = 25°C , Note 3 |

Note 1: The BL power consumption @100 nits with full white pattern under the $V_{cc} = 3.3V$, 25 °C, $f_v = 60Hz$ (frame frequency) condition


Note 2: PWM duty ratio linearity guarantees 10~100%.

Note 3: LED life time definition is brightness decrease to 50% of initial or abnormal lighting.

g. Module function block

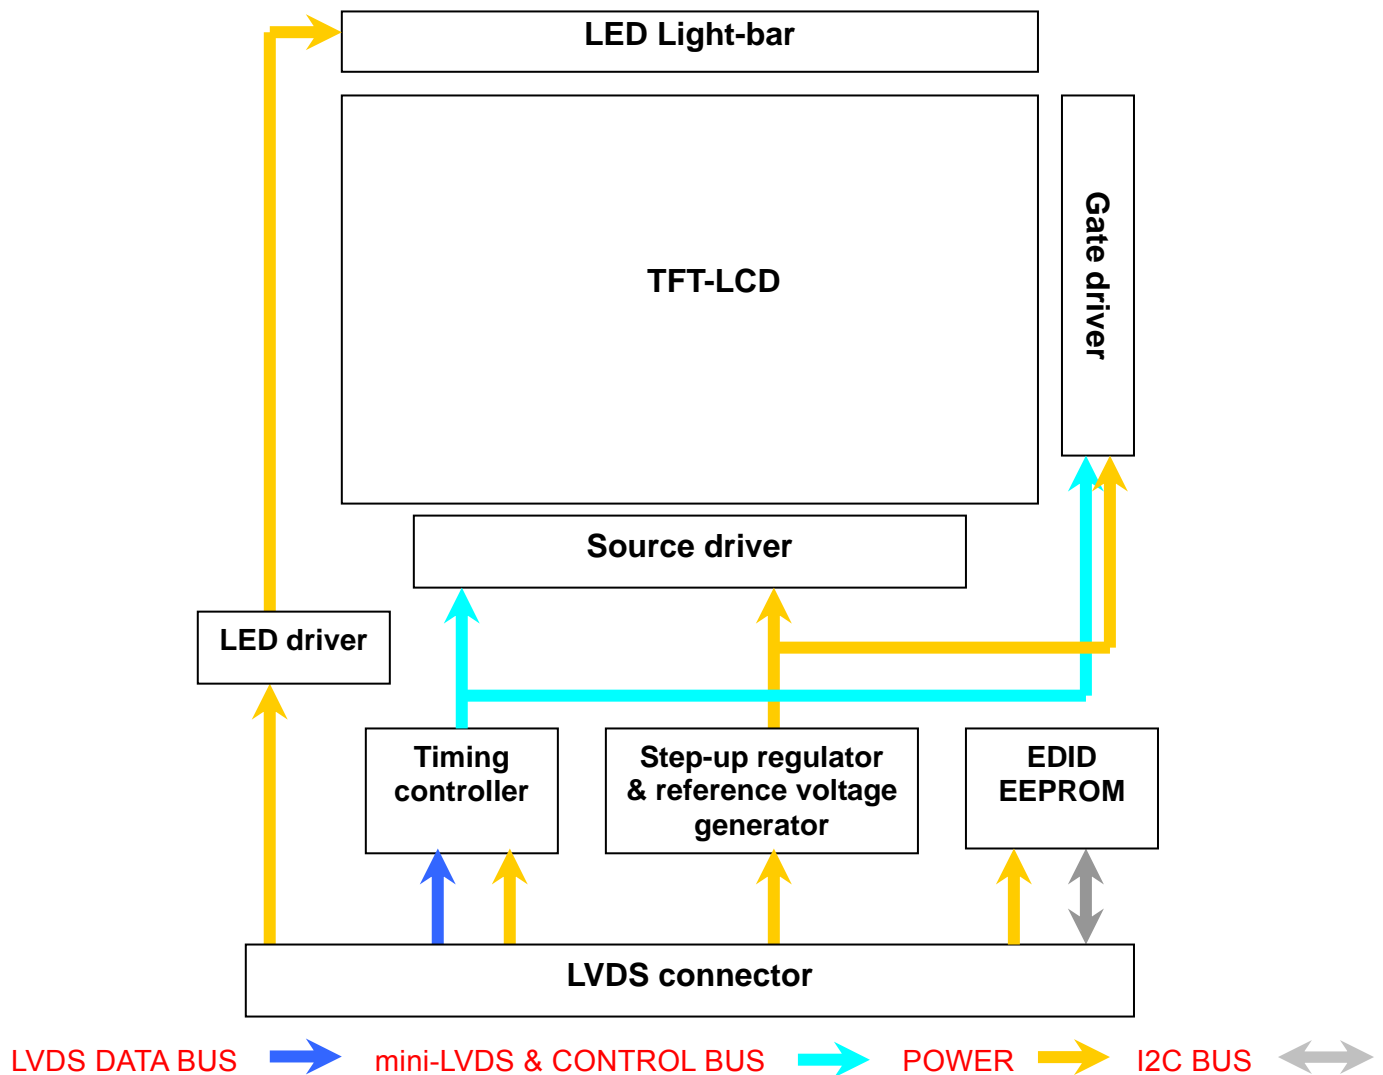

h. LED circuit block

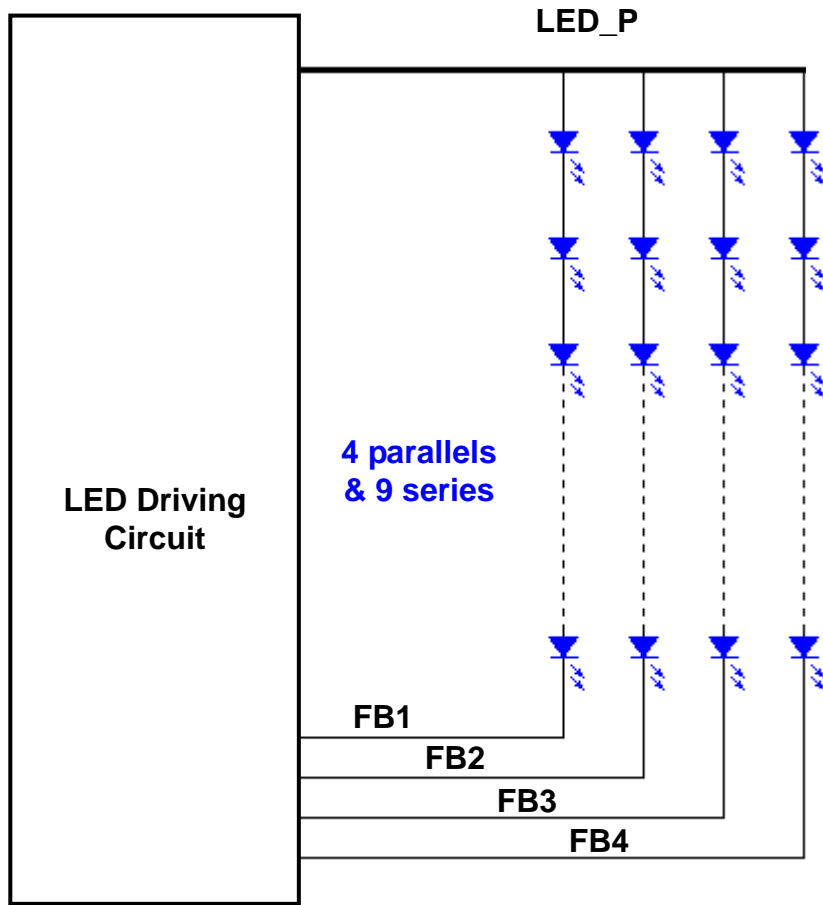

3. Optical specifications**Ambient temperature = 25**


| Item | Symbol | Condition | Specification | | | Unit | Remark |
|----------------------------------|------------------------|--------------------|---------------|-------|-------|------|------------|
| | | | Min. | Typ. | Max. | | |
| Response time | Tr+Tf | $\theta = 0^\circ$ | | 8 | 15 | ms | Note 3 |
| Contrast ratio | CR | $\theta = 0^\circ$ | | 500 | | | Note 2,4 |
| Viewing angle | Top | CR 10 | 15 | | | deg | Note 2,4,6 |
| | Bottom | | 30 | | | | |
| | Left | | 40 | | | | |
| | Right | | 40 | | | | |
| | Top | CR 100 | 6 | | | | |
| | Bottom | | 11 | | | | |
| | Left | | 25 | | | | |
| | Right | | 25 | | | | |
| Brightness (5 points average) | Y_L | | 187 | 220 | | nit | Note 2,5 |
| Color chromaticity (CIE) | W_x | $\theta = 0^\circ$ | -0.03 | 0.313 | +0.03 | | Note 2 |
| | W_y | | | 0.329 | | | |
| | R_x | | | 0.586 | | | |
| | R_y | | | 0.355 | | | |
| | G_x | | | 0.323 | | | |
| | G_y | | | 0.57 | | | |
| | B_x | | | 0.163 | | | |
| | B_y | | | 0.141 | | | |
| Color gamut | NTSC | CIE1931 | | 45 | | % | - |
| White uniformity | $\bar{\delta}_{W(5)}$ | | | | 1.25 | | Note 2,7 |
| | $\bar{\delta}_{W(13)}$ | | | | 1.5 | | |
| Cross talk | Ct | | | | 2% | | Note 8 |

Note 1: To be measured in dark room.

Note 2: To be measured with a viewing cone of 2° by Topcon luminance meter BM-5A.

Note 3: Definition of response time:

The output signals of BM-7 are measured when the input pattern are changed from "Black" to "White" (falling time) and from "White" to "Black" (rising time), respectively. The response time interval is between 10% and 90% of amplitudes. Refer to figure as below.

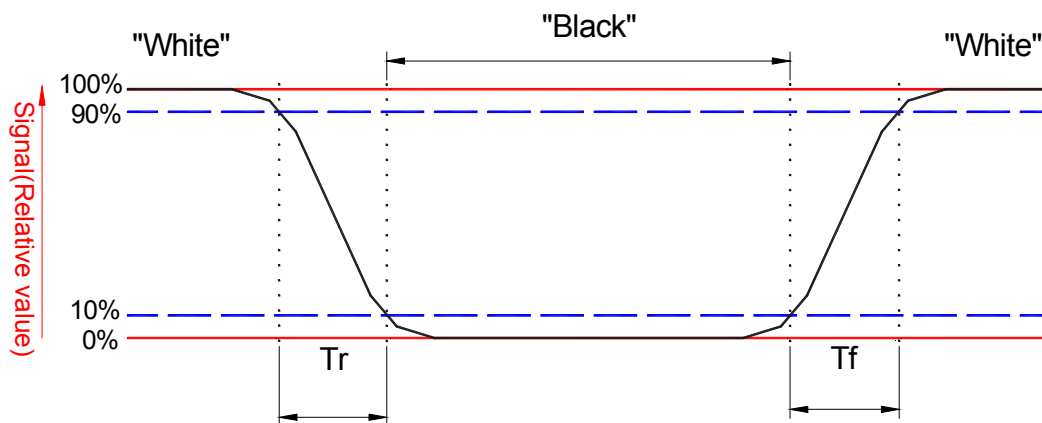

Note 4: Definition of contrast ratio:

Contrast ratio is calculated with the following formula:


$$\text{Contrast ratio (Avg of 5pts)} = \frac{L_{\text{white (Avg of 5pts.)}}}{L_{\text{Black (Avg of 5pts.)}}}$$

Note 5: Driving current for LED should be 20 mA.

Luminance is measured at the following thirteen points (1~13):

$$Y_L = (Y_5 + Y_{10} + Y_{11} + Y_{12} + Y_{13}) / 5$$

Note 6: Definition of viewing angle

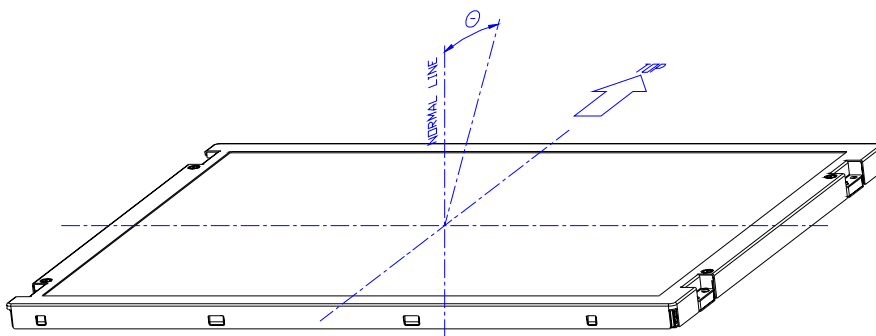

Note 7: Definition white uniformity


Luminance is measured at the following thirteen points (1~13):

$$W(13) = \frac{\text{Maximum brightness of thirteen points}}{\text{Minimum brightness of thirteen points}}$$


$$W(5) = \frac{\text{Maximum brightness of five points}}{\text{Minimum brightness of five points}}$$

13 point measuring locations refer to the point 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12 and 13.

5 point measuring locations refer to the point 5, 10, 11, 12 and 13.

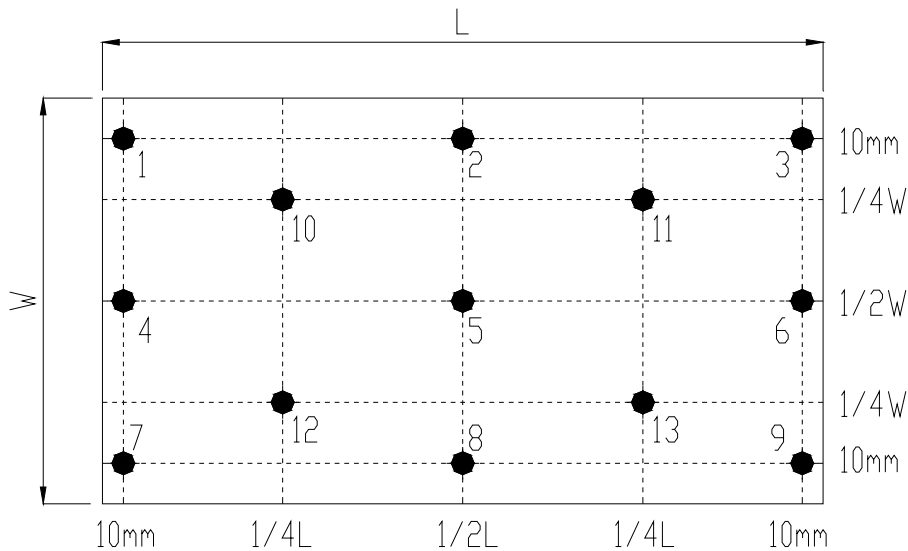

Note 8:

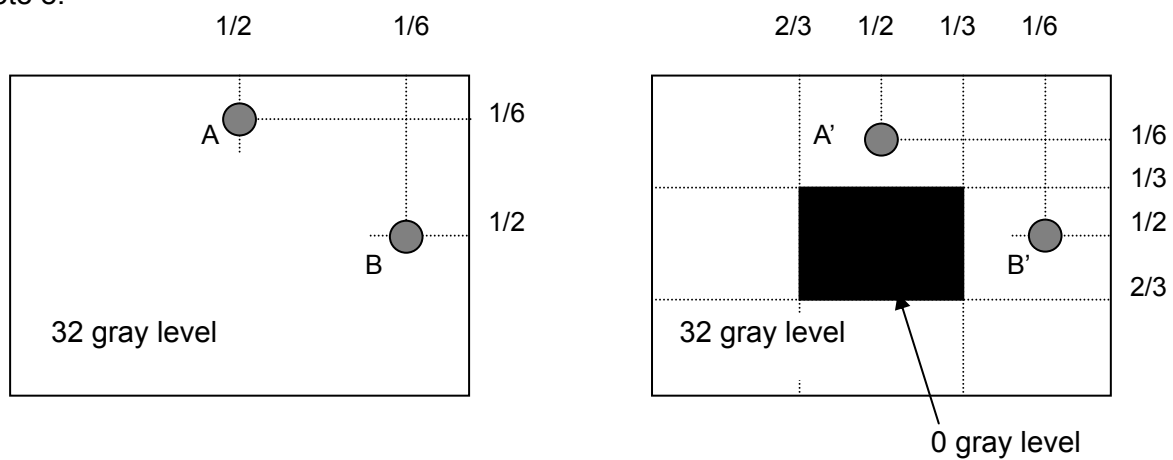

Unit: percentage of dimension of display area

$|L_A - L_{A'}| / L_A \times 100\% = 2\% \text{ max.}$, L_A and $L_{A'}$ are brightness at location A and A'

$|L_B - L_{B'}| / L_B \times 100\% = 2\% \text{ max.}$, L_B and $L_{B'}$ are brightness at location B and B'

4. Reliability test items

| Test Item | Test Condition | Judgment | Remark |
|--|---|----------|--------|
| High temperature storage | 60 , 240 hours | Note 1 | Note 2 |
| Low temperature storage | -20 , 240 hours | Note 1 | Note 2 |
| High temperature & high humidity operation | 40°C, 90% RH, 240 hours (No condensation) | Note 1 | Note 2 |
| High temperature operation | 50 , 240 hours | Note 1 | Note 2 |
| Low temperature operation | 0 , 240 hours | Note 1 | Note 2 |
| Thermal shock (Non-operation) | -25°C / 30 mins ~ -65°C / 30 mins 100 cycles | Note 1 | Note 2 |
| Electrostatic discharge (ESD) | 150 pF, 330Ω, Contact: ±8kV, Air: ±15kV | Note 1 | |
| Vibration (Non-operation) | 1.5G, 10 to 500 Hz random; 0.5hr in each perpendicular axes (X, Y, Z). | Note 1 | Note 2 |
| Mechanical shock (Non-operation) | 220G/2ms, Half sine wave, ±X, ±Y, ±Z one time for each direction | Note 1 | Note 2 |

Note 1: Pass: Normal display image with no obvious non-uniformity and no line defect.

Fail: No display image, obvious non-uniformity, or line defects.

Partial transformation of the module parts should be ignored.

Note 2: Evaluation should be tested after storage at room temperature more than one hour.

5. Safety

5-1. Sharp edge requirements

There will be no sharp edges or corners on the display assembly that could cause injury.

5-2. Materials

a. Toxicity

There will be no carcinogenic materials used anywhere in the display module. If toxic materials are used, they will be reviewed and approved by the responsible InnoLux Toxicologist.

b. Flammability

All components including electrical components that do not meet the flammability grade UL94-V0 in the module will complete the flammability rating exception approval process. The printed circuit board will be made from material rated 94-V0 or better. The actual UL flammability rating will be printed on the printed circuit board.

c. Capacitors

If any polarized capacitors are used in the display assembly, provisions will be made to keep them from being inserted backwards.

6. Display quality


The display quality of the color TFT-LCD module should be in compliance with the InnoLux incoming inspection standard.

7. Handling precaution


- (1) Do not apply rough force such as bending or twisting to the module during assembly.
- (2) To assemble or install module into user's system can be only in clean working areas. The dust and oil may cause electrical short or worsen the polarizer.
- (3) It's not permitted to have pressure or impulse on the module because the LCD panel and backlight will be damaged.
- (4) Always follow the correct power sequence when LCD module is connecting and operating.
- (5) Do not pull the I/F connector in or out while the module is operating.
- (6) Do not disassemble the module.
- (7) Use a soft dry cloth without chemicals for cleaning, because the surface of polarizer is very soft and easily scratched.
- (8) It is dangerous that moisture come into or contacted the LCD module, because moisture may damage LCD module when it is operating.
- (9) High temperature or humidity may reduce the performance of module. Please store LCD module within the specified storage conditions.

8. Label Definition

8-1. Module label

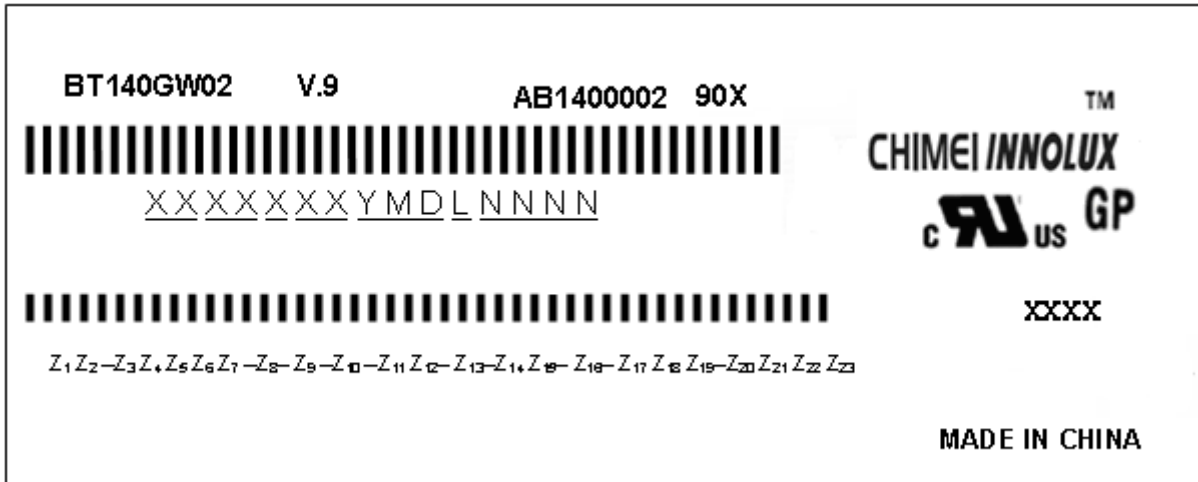

- (a) Model Number : BT140GW02 V.9
- (b) Product Number : AB140000290X
- (c) Serial ID: XXXXXXXXYMDLNNNN

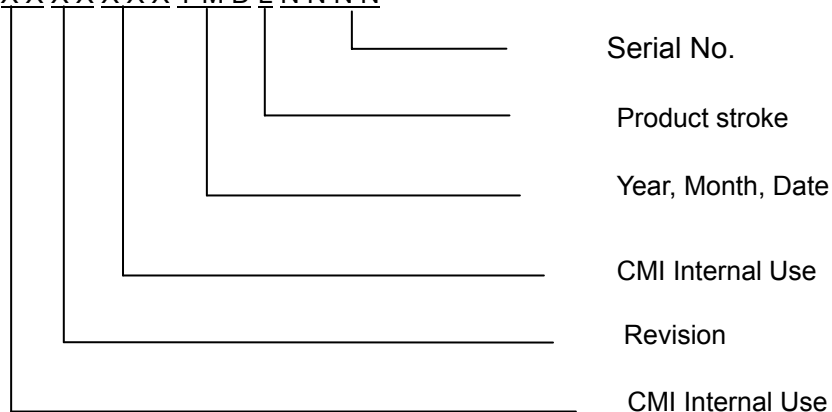


- (d) Production Location: MADE IN XXXX.
- (e) UL/CB logo: "XXXX" especially stands for panel manufactured by CMI Ningbo satisfying UL/CB requirement. "LEOO" "CANO" is the CMI's UL factory code for Ningbo factory.

Serial ID II (INL Internal Use):

Z₁ Z₂ -Z₃ Z₄ Z₅ Z₆ Z₇ -Z₈ -Z₉ -Z₁₀ -Z₁₁ Z₁₂- Z₁₃-Z₁₄ Z₁₅- Z₁₆- Z₁₇ Z₁₈ Z₁₉-Z₂₀ Z₂₁ Z₂₂ Z₂₃


8-2. Carton label

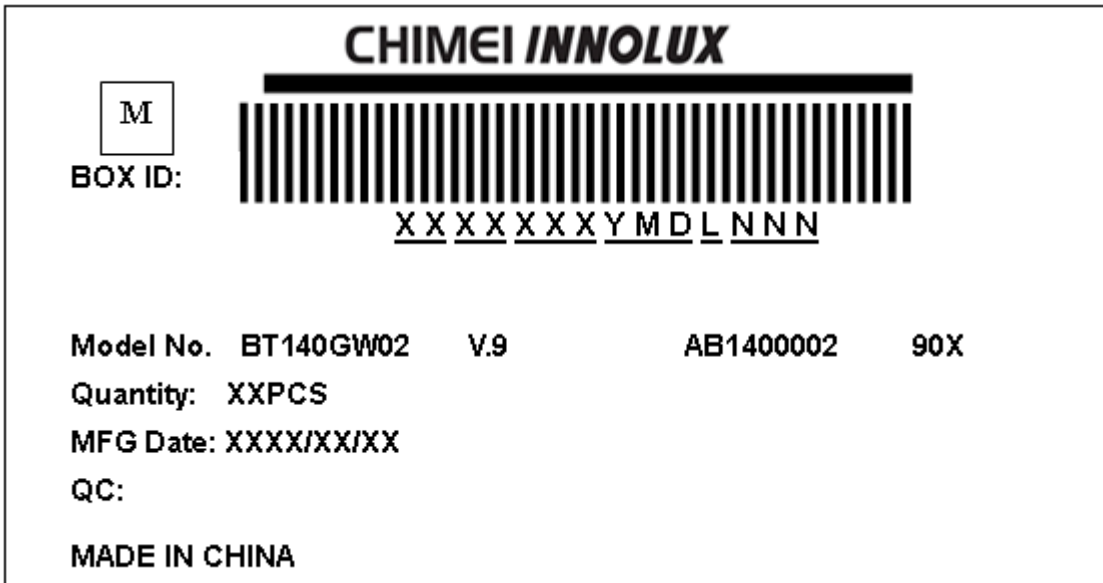

(a) Model No. : BT140GW02 V.9

(b) Package Quantity: XXPCS

(c) Serial ID: XXXXXXYMDLNNN

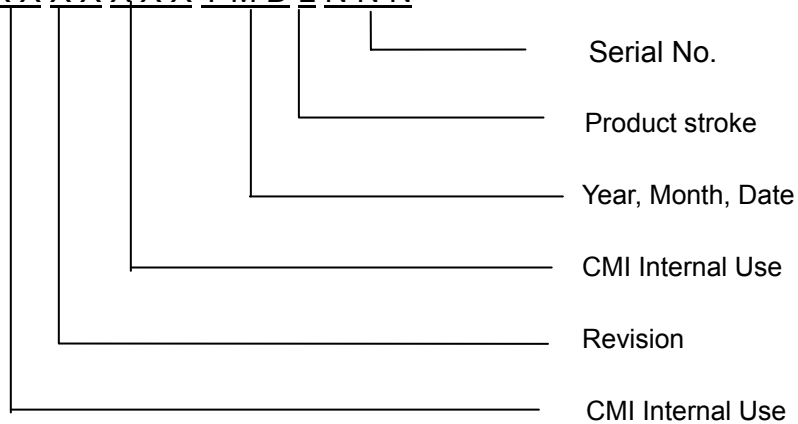


9. Packing Form




↓ Step A
Put LCM into A/S bag




↓ Step B
Turn back A/S bag




↓ Step C



↙ Step D
Put LCM with A/S bag into

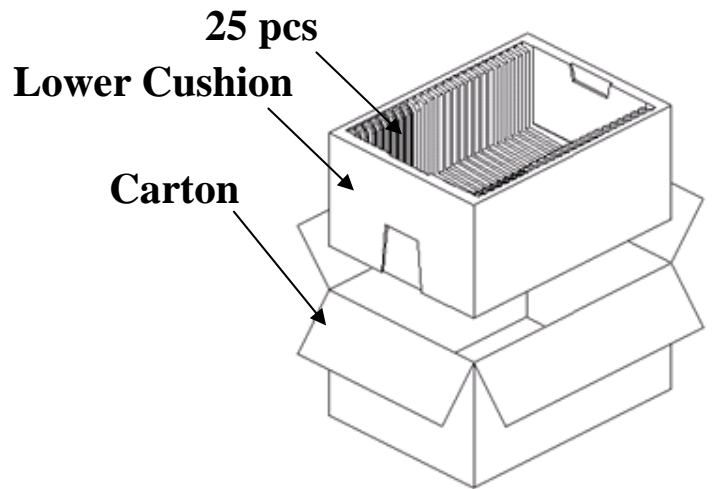


Step E

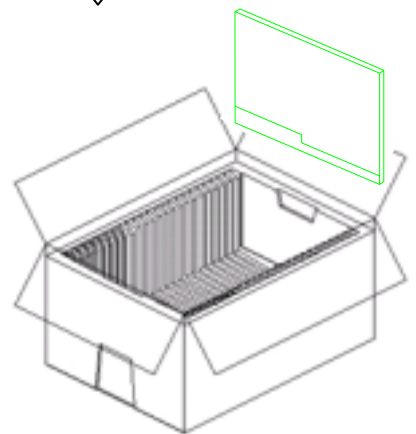


Step F


Upper Cushion

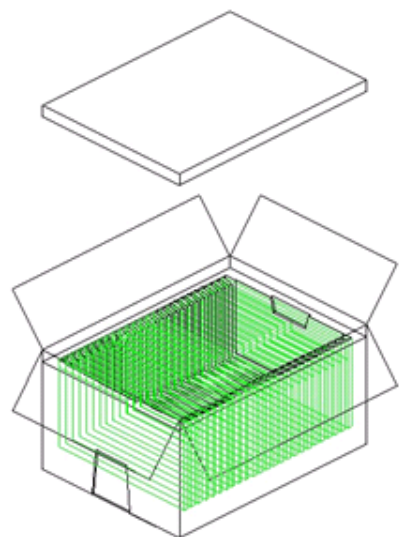


10. Mechanical Drawings
10-1. Front side

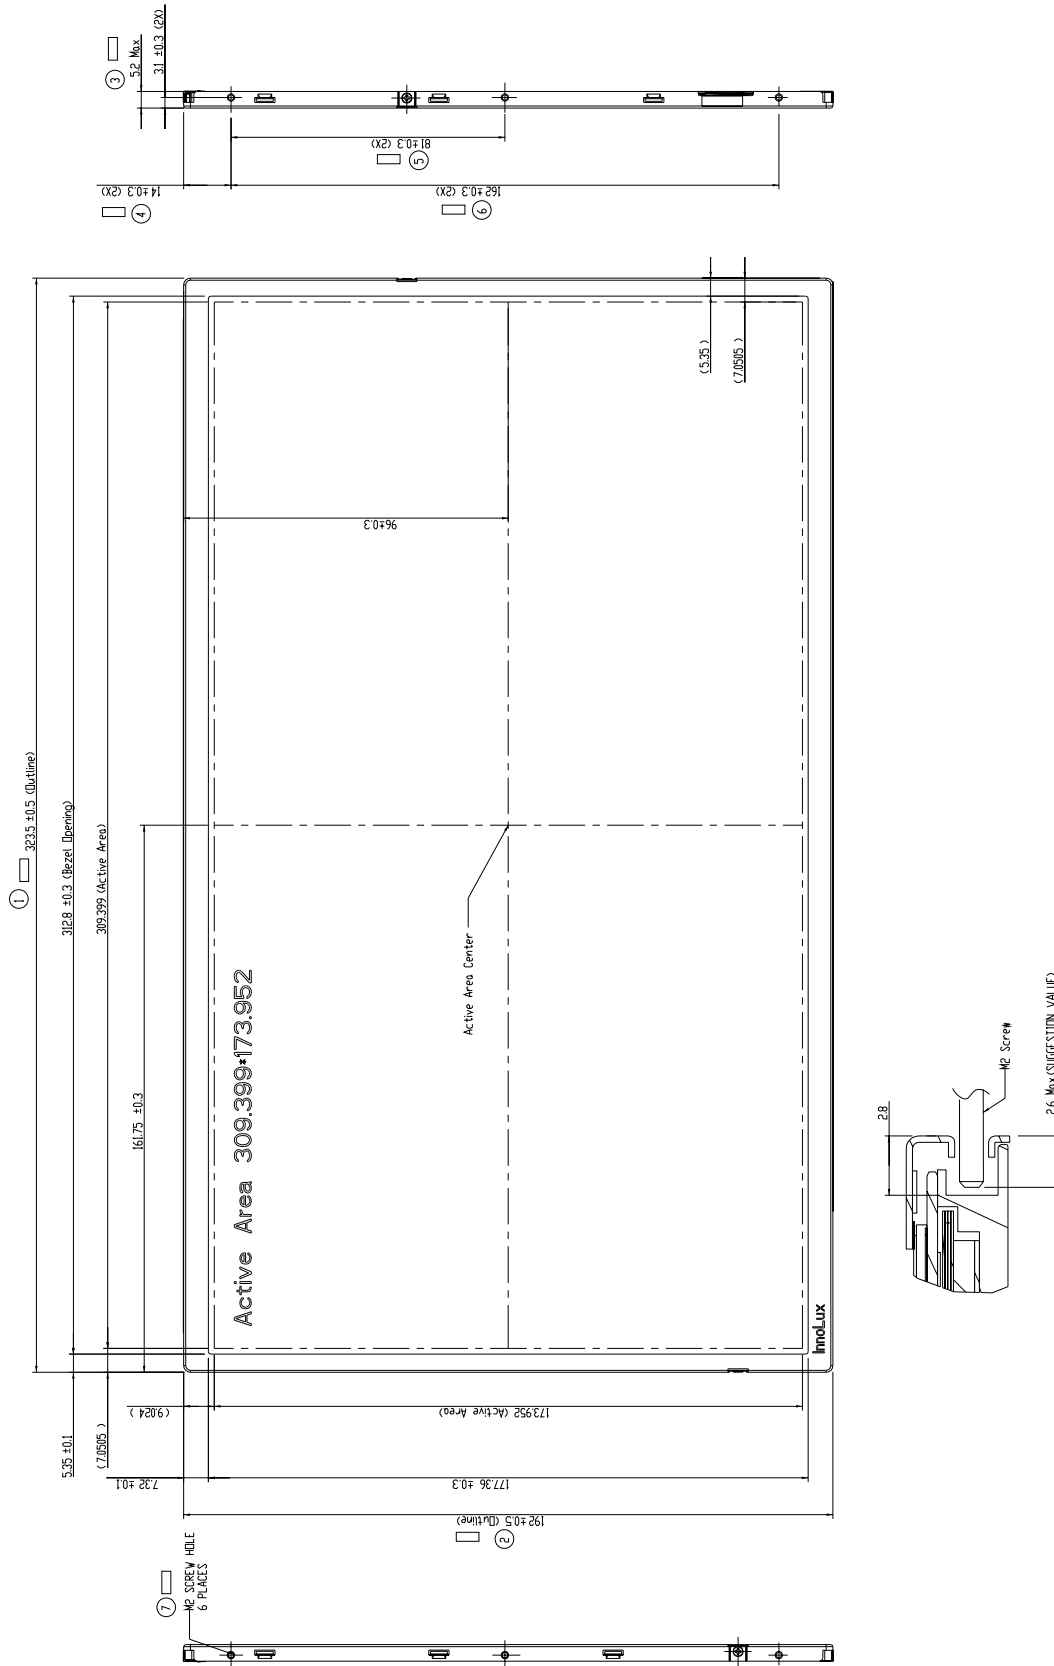

10-2 Rear side

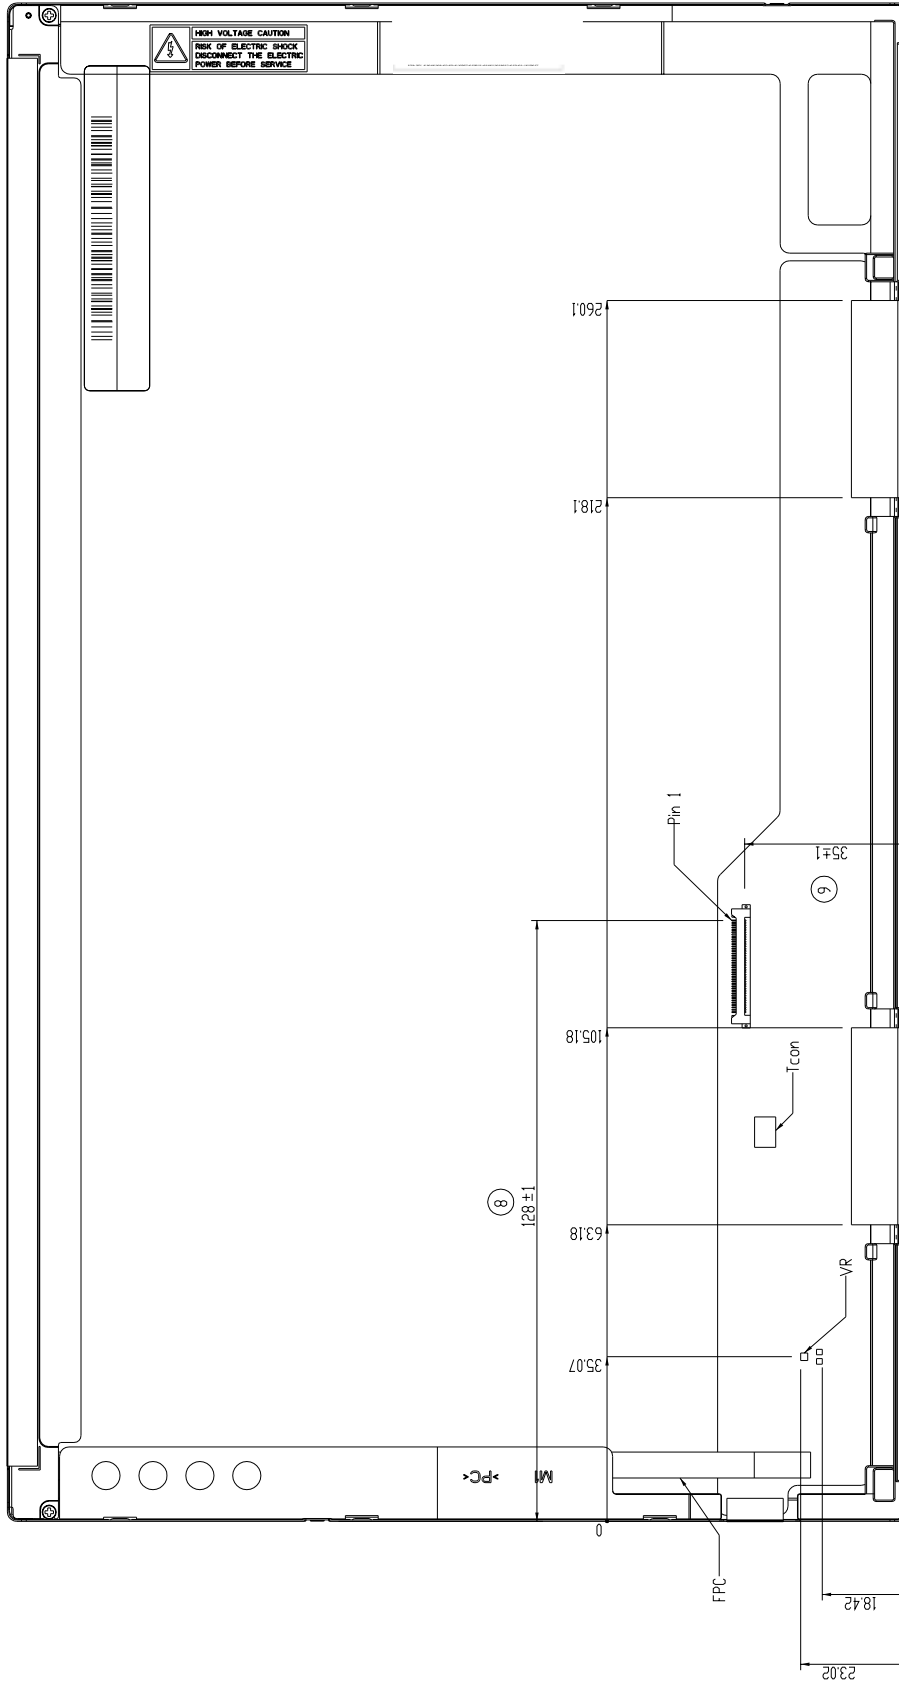

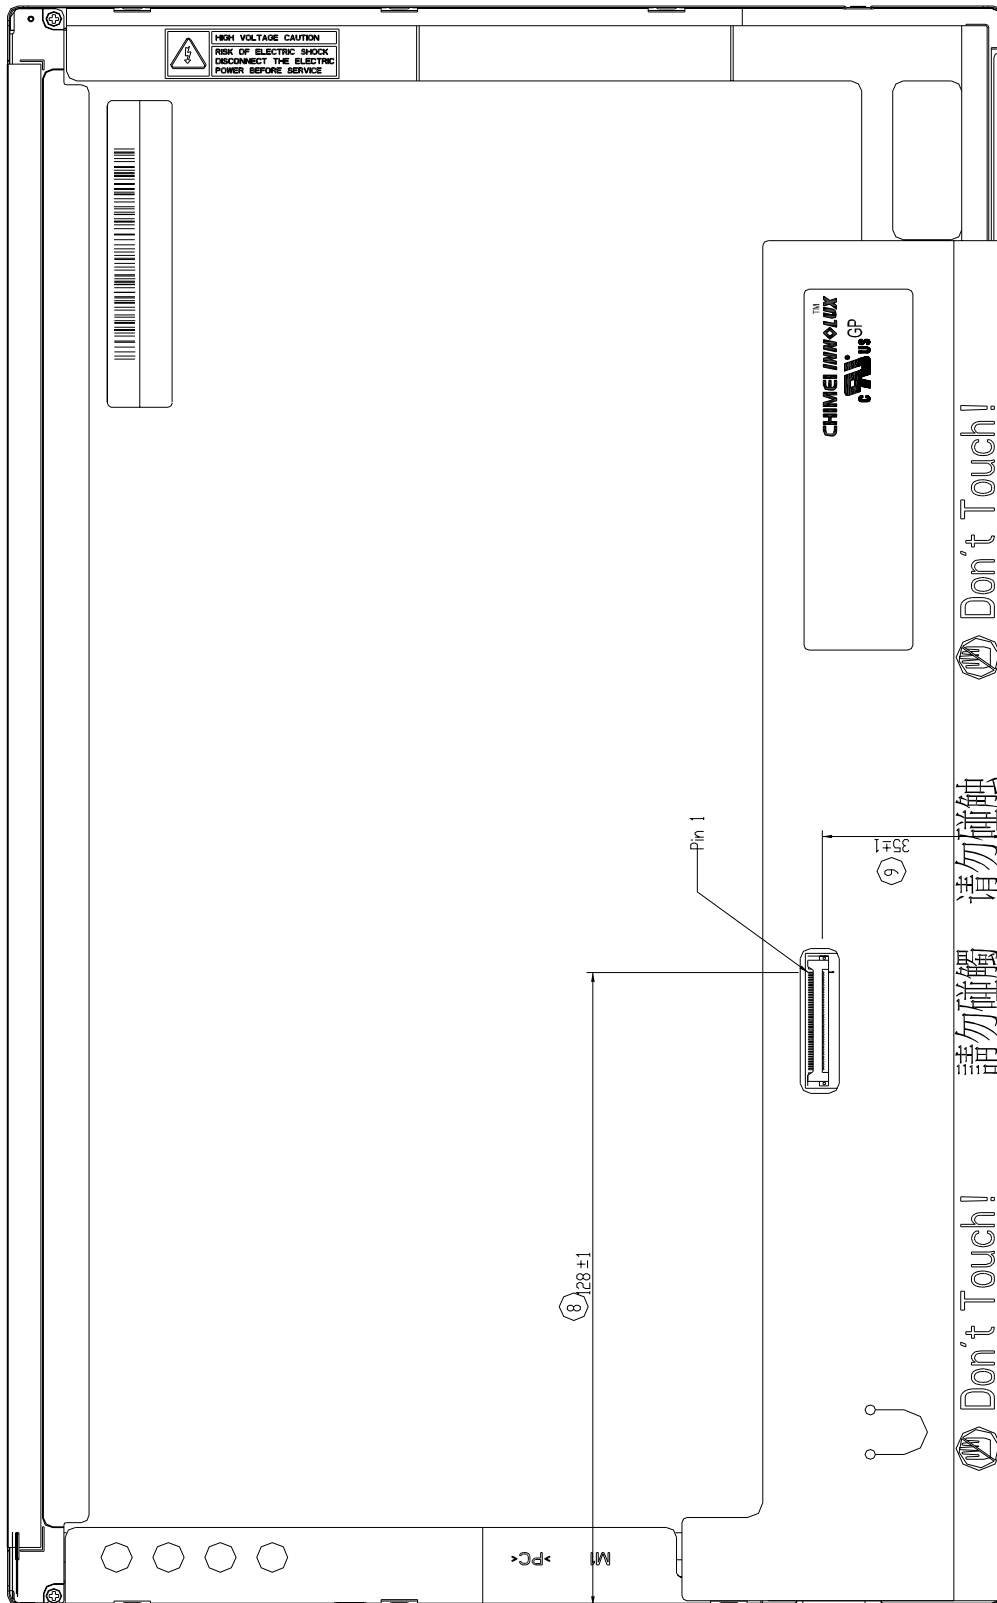

Appendix: EDID Code

| | Byte (Hex) | Field Name and Comments | Value (Hex) | Value (Bin) |
|--------------------------------------|---------------------------|---|---|-------------|
| Header | 00 | Header | 00 | 00000000 |
| | 01 | Header | FF | 11111111 |
| | 02 | Header | FF | 11111111 |
| | 03 | Header | FF | 11111111 |
| | 04 | Header | FF | 11111111 |
| | 05 | Header | FF | 11111111 |
| | 06 | Header | FF | 11111111 |
| | 07 | Header | 00 | 00000000 |
| Vendor / Product EDID Version | 08 | EISA manufacture code (3 Character ID) " CMO" | 0D | 00001101 |
| | 09 | EISA manufacture code (Compressed ASC) | AF | 10101111 |
| | 0A | Panel Supplier Reserved - Product Code "44" | 2C | 00101100 |
| | 0B | (Hex. LSB first) | 00 | 00000000 |
| | 0C | LCD Module Serial No - Preferred but Optional ("0" If not used) | 00 | 00000000 |
| | 0D | LCD Module Serial No - Preferred but Optional ("0" If not used) | 00 | 00000000 |
| | 0E | LCD Module Serial No - Preferred but Optional ("0" If not used) | 00 | 00000000 |
| | 0F | LCD Module Serial No - Preferred but Optional ("0" If not used) | 00 | 00000000 |
| | 10 | Week of Manufacture 00 weeks | 00 | 00000000 |
| | 11 | Year of Manufacture 2010 years | 14 | 00010100 |
| | 12 | EDID structure version # = 1 | 01 | 00000001 |
| | 13 | EDID revision # = 3 | 03 | 00000011 |
| | Display Parameters | 14 | Video input Definition = Digital signal | 80 |
| 15 | | Max H image size (Rounded cm) = 31 cm | 1F | 00011111 |
| 16 | | Max V image size (Rounded cm) = 18 cm | 12 | 00010010 |
| 17 | | Display gamma = (gamma*100)-100 = Example:(2.2*100)-100=120 = 2.2 Gamma | 78 | 01111000 |
| 18 | | Feature Support (no_DPMS, no_Active Off/Very Low Power, RGB color display, Timing BLK 1,no_GTF) | 0A | 00001010 |
| Panel Color Coordinates | 19 | Red/Green Low Bits (RxRy/GxGy) | 0C | 00001100 |
| | 1A | Blue/White Low Bits (BxBY/WxWy) | C5 | 11000101 |
| | 1B | Red X Rx = 0.586 | 96 | 10010110 |
| | 1C | Red Y Ry = 0.355 | 5B | 01011011 |
| | 1D | Green X Gx = 0.323 | 52 | 01010010 |
| | 1E | Green Y Gy = 0.550 | 92 | 10010010 |
| | 1F | Blue X Bx = 0.155 | 29 | 00101001 |
| | 20 | Blue Y By = 0.155 | 24 | 00100100 |
| | 21 | White X Wx = 0.313 | 50 | 01010000 |
| | 22 | White Y Wy = 0.329 | 54 | 01010100 |

| | | | | | | |
|-----------------------------|---|---|---------------------|-------------------|----------|----------|
| <i>Established Timings</i> | 23 | Established timing 1 (00h if not used) | | 00 | 00000000 | |
| | 24 | Established timing 2 (00h if not used) | | 00 | 00000000 | |
| | 25 | Manufacturer's timings (00h if not used) | | 00 | 00000000 | |
| <i>Standard Timing ID</i> | 26 | Standard timing ID1 (01h if not used) | | 01 | 00000001 | |
| | 27 | Standard timing ID1 (01h if not used) | | 01 | 00000001 | |
| | 28 | Standard timing ID2 (01h if not used) | | 01 | 00000001 | |
| | 29 | Standard timing ID2 (01h if not used) | | 01 | 00000001 | |
| | 2A | Standard timing ID3 (01h if not used) | | 01 | 00000001 | |
| | 2B | Standard timing ID3 (01h if not used) | | 01 | 00000001 | |
| | 2C | Standard timing ID4 (01h if not used) | | 01 | 00000001 | |
| | 2D | Standard timing ID4 (01h if not used) | | 01 | 00000001 | |
| | 2E | Standard timing ID5 (01h if not used) | | 01 | 00000001 | |
| | 2F | Standard timing ID5 (01h if not used) | | 01 | 00000001 | |
| | 30 | Standard timing ID6 (01h if not used) | | 01 | 00000001 | |
| | 31 | Standard timing ID6 (01h if not used) | | 01 | 00000001 | |
| | 32 | Standard timing ID7 (01h if not used) | | 01 | 00000001 | |
| | 33 | Standard timing ID7 (01h if not used) | | 01 | 00000001 | |
| 34 | Standard timing ID8 (01h if not used) | | 01 | 00000001 | | |
| 35 | Standard timing ID8 (01h if not used) | | 01 | 00000001 | | |
| <i>Timing Descriptor #1</i> | 36 | Pixel Clock/10,000 (LSB) 71 MHz @ 60Hz | | BC | 10111100 | |
| | 37 | Pixel Clock/10,000 (MSB) | | 1B | 00011011 | |
| | 38 | Horizontal Active | (lower 8 bits) | 1366 Pixels | 56 | 01010110 |
| | 39 | Horizontal Blanking(Thp-HA) | (lower 8 bits) | 132 Pixels | 84 | 10000100 |
| | 3A | Horizontal Active / Horizontal Blanking(Thp-HA) (upper 4:4bits) | | 50 | 01010000 | |
| | 3B | Vertical Avtive | 768 Lines | | 00 | 00000000 |
| | 3C | Vertical Blanking (Tvp-HA) (DE Blanking typ.for DE only panels) | 22 Lines | | 16 | 00010110 |
| | 3D | Vertical Active : Vertical Blanking (Tvp-HA) | (upper 4:4bits) | | 30 | 00110000 |
| | 3E | Horizontal Sync. Offset (Thfp) | 48 Pixels | | 30 | 00110000 |
| | 3F | Horizontal Sync Pulse Width (HSPW) | 32 Pixels | | 20 | 00100000 |
| | 40 | Vertical Sync Offset(Tvfp) | : Sync Width (VSPW) | 1 Lines : 4 Lines | 14 | 00010100 |
| | 41 | Horizontal Vertical Sync Offset/Width | (upper 2bits) | | 00 | 00000000 |
| | 42 | Horizontal Image Size (mm) | 309 mm | | 35 | 00110101 |
| | 43 | Vertical Image Size (mm) | 174 mm | | AE | 10101110 |
| | 44 | Horizontal Image Size / Vertical Image Size | | | 10 | 00010000 |
| | 45 | Horizontal Border = 0 (Zero for Notebook LCD) | | | 00 | 00000000 |
| | 46 | Vertical Border = 0 (Zero for Notebook LCD) | | | 00 | 00000000 |
| 47 | Non-Interlace, Normal display, no stereo, Digital Separate (Vsync_NEG, Hsync_NEG), DE only note : LSB is set to '1' if panel is DE-timing only. H/V can be ignored. | | | 18 | 00011000 | |

| | | | | |
|-----------------------------|--|--|-----------|----------|
| Timing Descriptor #2 | 48 | Flag | 00 | 00000000 |
| | 49 | Flag | 00 | 00000000 |
| | 4A | Flag | 00 | 00000000 |
| | 4B | Data Type Tag (Descriptor Defined by manufacturer) | 00 | 00000000 |
| | 4C | Flag | 00 | 00000000 |
| | 4D | Descriptor Defined by manufacturer | 20 | 00100000 |
| | 4E | Descriptor Defined by manufacturer | 20 | 00100000 |
| | 4F | Descriptor Defined by manufacturer | 20 | 00100000 |
| | 50 | Descriptor Defined by manufacturer | 20 | 00100000 |
| | 51 | Descriptor Defined by manufacturer | 20 | 00100000 |
| | 52 | Descriptor Defined by manufacturer | 20 | 00100000 |
| | 53 | Descriptor Defined by manufacturer | 20 | 00100000 |
| | 54 | Descriptor Defined by manufacturer | 20 | 00100000 |
| | 55 | Descriptor Defined by manufacturer | 20 | 00100000 |
| | 56 | Descriptor Defined by manufacturer | 20 | 00100000 |
| | 57 | Descriptor Defined by manufacturer | 20 | 00100000 |
| | 58 | Descriptor Defined by manufacturer | 20 | 00100000 |
| 59 | Descriptor Defined by manufacturer | 20 | 00100000 | |
| Timing Descriptor #3 | 5A | Flag | 00 | 00000000 |
| | 5B | Flag | 00 | 00000000 |
| | 5C | Flag | 00 | 00000000 |
| | 5D | Data Type Tag (ASCII String) | FE | 11111110 |
| | 5E | Flag | 00 | 00000000 |
| | 5F | ASCII String C | 43 | 01000011 |
| | 60 | ASCII String M | 4D | 01001101 |
| | 61 | ASCII String O | 4F | 01001111 |
| | 62 | ASCII String | 0A | 00001010 |
| | 63 | ASCII String | 20 | 00100000 |
| | 64 | ASCII String | 20 | 00100000 |
| | 65 | ASCII String | 20 | 00100000 |
| | 66 | ASCII String | 20 | 00100000 |
| | 67 | ASCII String | 20 | 00100000 |
| | 68 | ASCII String | 20 | 00100000 |
| | 69 | Manufacturer P/N(If<13 char--> 0Ah, then terminate with ASC code 0Ah,set remaining char = 20h) | 20 | 00100000 |
| | 6A | Manufacturer P/N(If<13 char--> 0Ah, then terminate with ASC code 0Ah,set remaining char = 20h) | 20 | 00100000 |
| 6B | Manufacturer P/N(If<13 char--> 0Ah, then terminate with ASC code 0Ah,set remaining char = 20h) | 20 | 00100000 | |

| | | | | |
|-----------------------------|-------------------------------|--|-----------|----------|
| <i>Timing Descriptor #4</i> | 6C | Flag | 00 | 00000000 |
| | 6D | Flag | 00 | 00000000 |
| | 6E | Flag | 00 | 00000000 |
| | 6F | Data Type Tag (ASCII String) | FE | 11111110 |
| | 70 | Flag | 00 | 00000000 |
| | 71 | Monitor Name, stored as ASCII "B" | 42 | 01000010 |
| | 72 | Monitor Name, stored as ASCII "T" | 54 | 01010100 |
| | 73 | Monitor Name, stored as ASCII "1" | 31 | 00110001 |
| | 74 | Monitor Name, stored as ASCII "4" | 34 | 00110100 |
| | 75 | Monitor Name, stored as ASCII "0" | 30 | 00110000 |
| | 76 | Monitor Name, stored as ASCII "G" | 47 | 01000111 |
| | 77 | Monitor Name, stored as ASCII "W" | 57 | 01010111 |
| | 78 | Monitor Name, stored as ASCII "0" | 30 | 00110000 |
| | 79 | Monitor Name, stored as ASCII "2" | 32 | 00110010 |
| | 7A | Monitor Name, stored as ASCII "V" | 56 | 01010110 |
| | 7B | Monitor Name, stored as ASCII "9" | 39 | 00111001 |
| 7C | Monitor Name, stored as ASCII | 0A | 00001010 | |
| 7D | Monitor Name, stored as ASCII | 20 | 00100000 | |
| <i>Checksum</i> | 7E | Extension flag (# of optional 128 panel ID extension block to follow, Typ = 0) | 00 | 00000000 |
| | 7F | Check Sum (The 1-byte sum of all 128 bytes in this panel ID block shall = 0) | ED | 11101101 |