


General Purpose PNP Epitaxial Planar Transistor

BTP2907AN3


Description

- The BTP2907AN3 is designed for general purpose amplifier applications. It is housed in the SOT-23 package which is designed for low power surface mount applications.
- Low $V_{CE(sat)}$
- High switching speed.
- Complementary to BTN2222AN3
- Pb-free lead plating and halogen-free package

Symbol

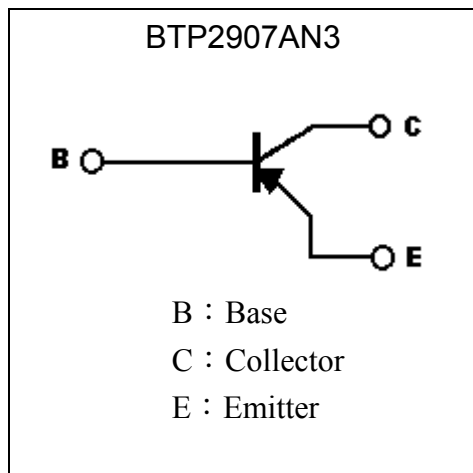


Outline

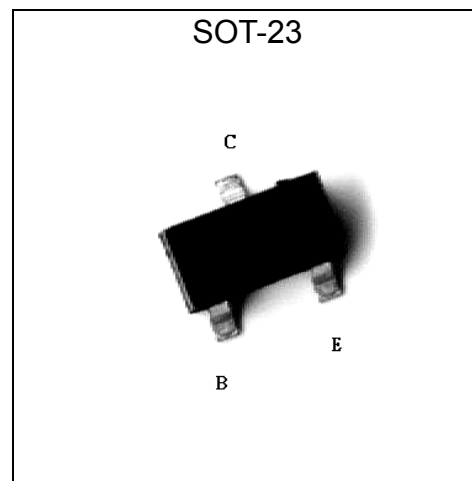

Ordering Information

Device	Package	Shipping
BTP2907AN3-0-T1-G	SOT-23 (Pb-free lead plating and halogen-free package)	3000 pcs / tape & reel

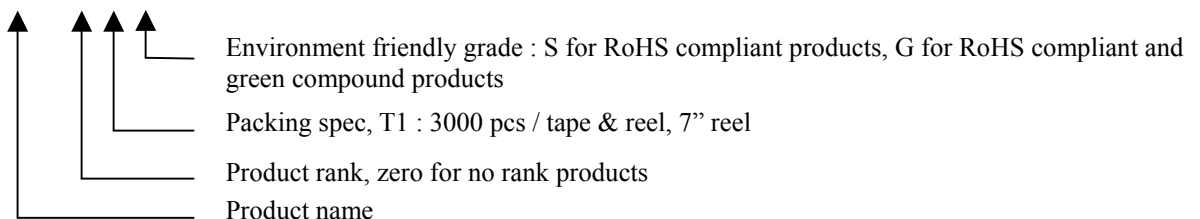

**Absolute Maximum Ratings** (Ta=25°C)

Parameter	Symbol	Limits	Unit
Collector-Base Voltage	V _{CB0}	-60	V
Collector-Emitter Voltage	V _{CEO}	-60	V
Emitter-Base Voltage	V _{EBO}	-5	V
Collector Current	I _C	-600	mA
Power Dissipation @T _A =25°C	P _d	225 (Note 1)	mW
Thermal Resistance, Junction to Ambient	R _{θJA}	556 (Note 1)	°C/W
Junction Temperature	T _j	150	°C
Storage Temperature	T _{stg}	-55~+150	°C

Note 1:When mounted on a FR-5 board with area measuring 1.0x0.75x0.062 in.

Characteristics (Ta=25°C)


Symbol	Min.	Typ.	Max.	Unit	Test Conditions
BV _{CB0}	-60	-	-	V	I _C =-10μA
*BV _{CEO}	-60	-	-	V	I _C =-10mA
BV _{EBO}	-5	-	-	V	I _E =-10μA
IC _{B0}	-	-	-10	nA	V _{CB} =-50V
IC _{EX}	-	-	-50	nA	V _{CE} =-30V, V _{BE(OFF)} =0.5V
*V _{CE(sat)}	-	-0.2	-0.4	V	I _C =-150mA, I _B =-15mA
*V _{CE(sat)}	-	-0.5	-1.6	V	I _C =-500mA, I _B =-50mA
*V _{BE(sat)}	-	-	-1.3	V	I _C =-150mA, I _B =-15mA
*V _{BE(sat)}	-	-	-2.6	V	I _C =-500mA, I _B =-50mA
*h _{FE}	75	-	-	-	V _{CE} =-10V, I _C =-100μA
*h _{FE}	100	-	-	-	V _{CE} =-10V, I _C =-1mA
*h _{FE}	100	-	-	-	V _{CE} =-10V, I _C =-10mA
*h _{FE}	100	-	300	-	V _{CE} =-10V, I _C =-150mA
*h _{FE}	50	-	-	-	V _{CE} =-10V, I _C =-500mA
f _T	200	-	-	MHz	V _{CE} =-20V, I _C =-50mA, f=100MHz
C _{ob}	-	-	8	pF	V _{CB} =-10V, I _E =0A, f=1MHz

*Pulse Test: Pulse Width ≤380μs, Duty Cycle≤2%




Typical Characteristics


Emitter Grounded Output Characteristics

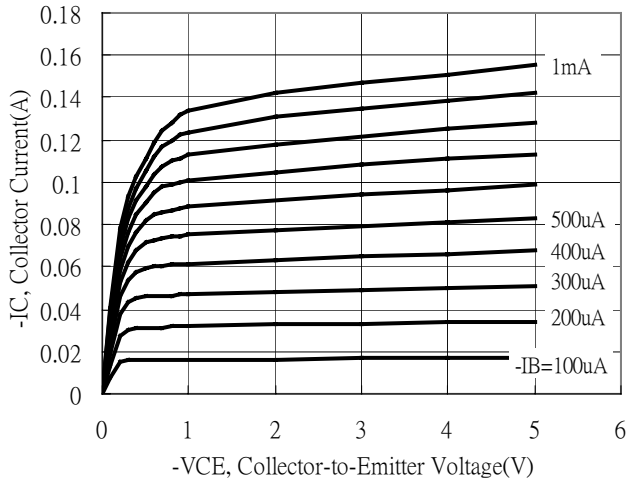


Emitter Grounded Output Characteristics

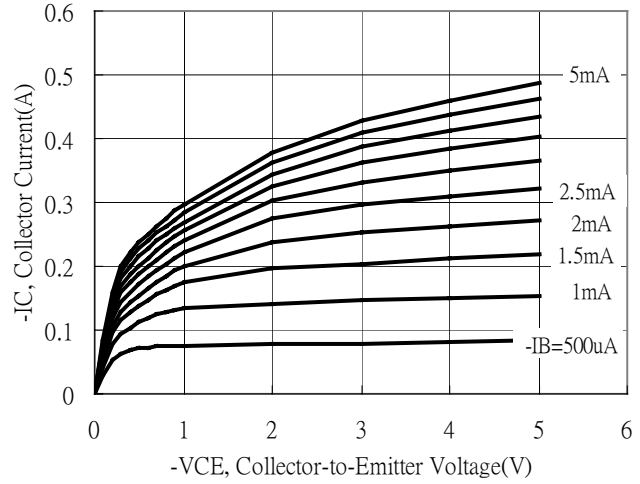


Emitter Grounded Output Characteristics

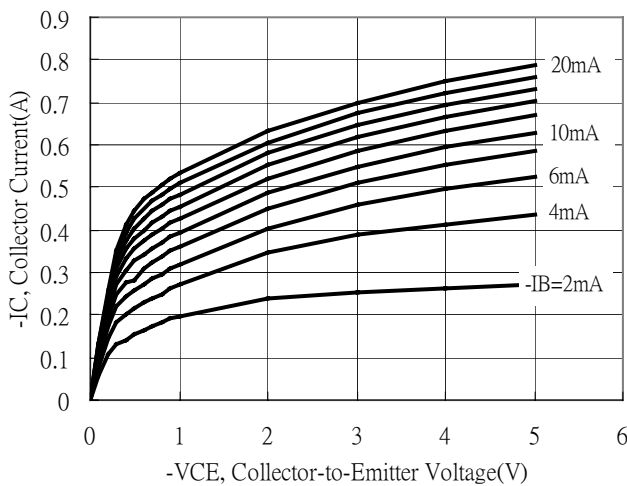


Emitter Grounded Output Characteristics

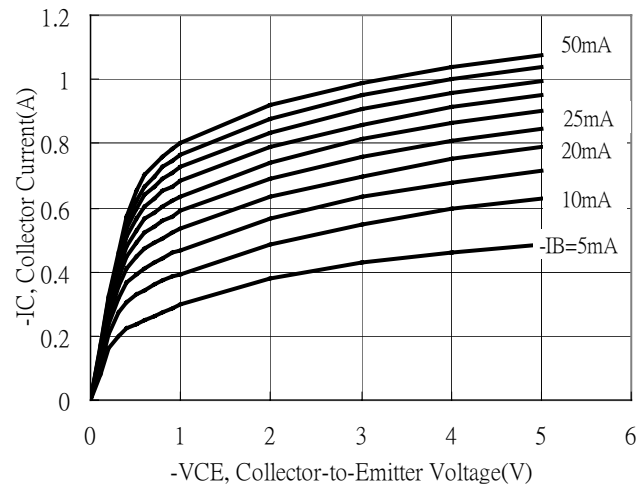

Current Gain vs Collector Current






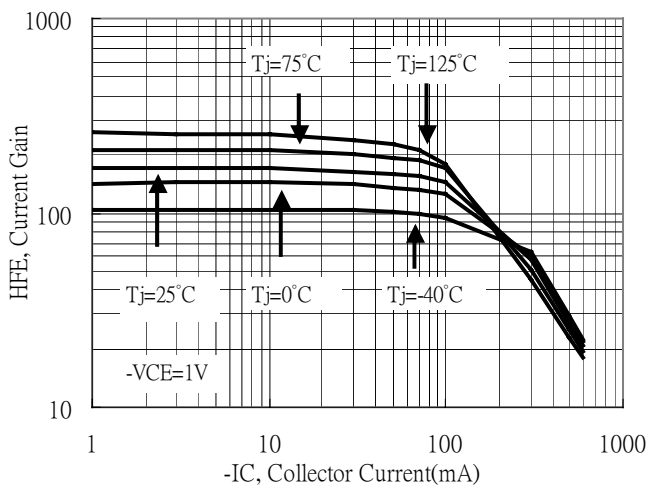


Current Gain vs Collector Current




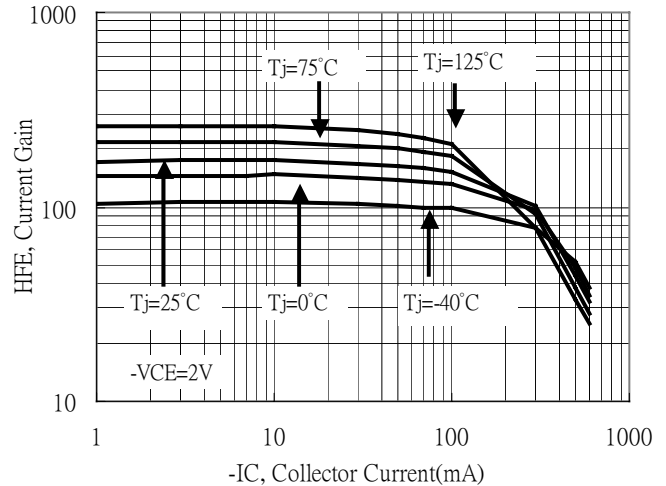





Typical Characteristics(Cont.)

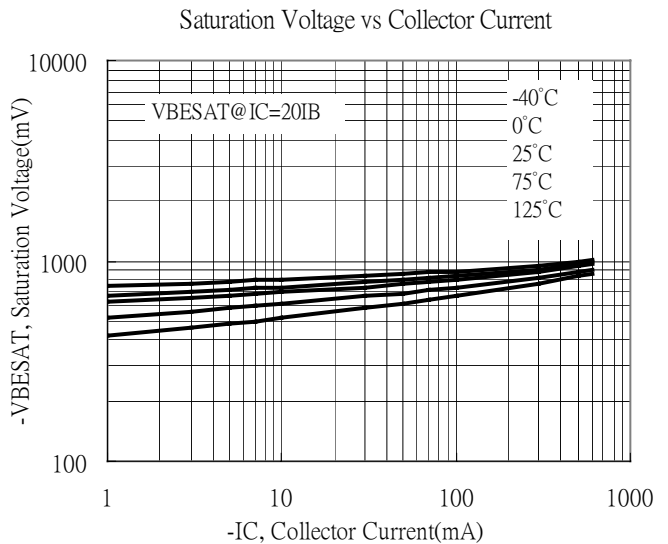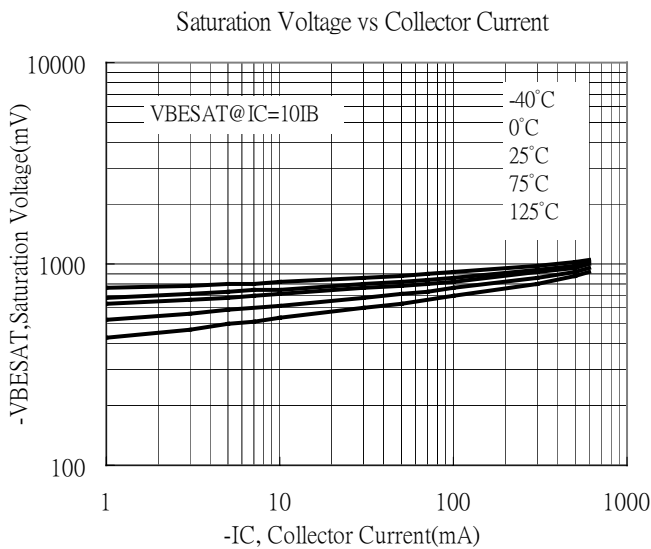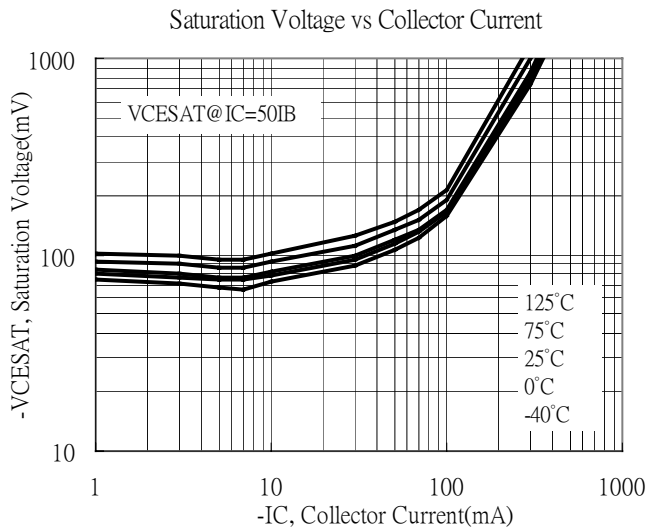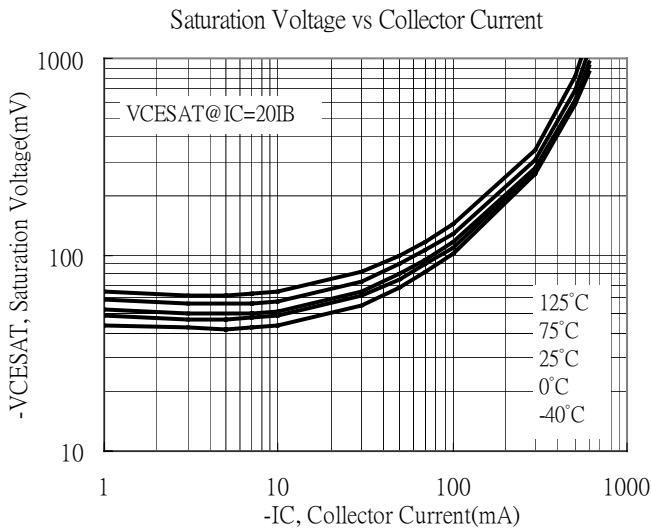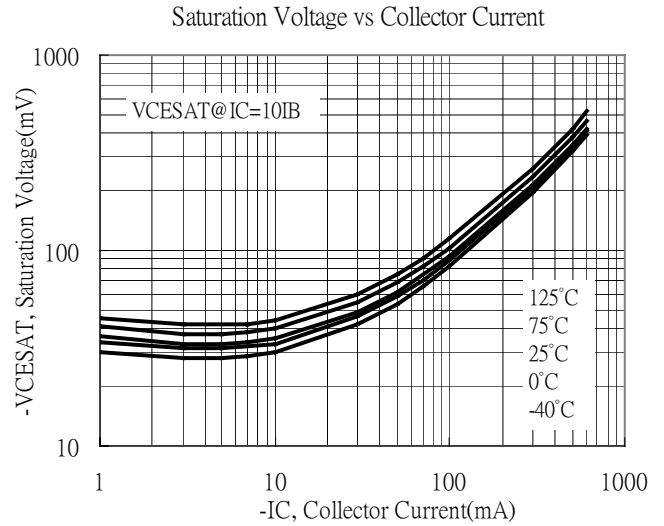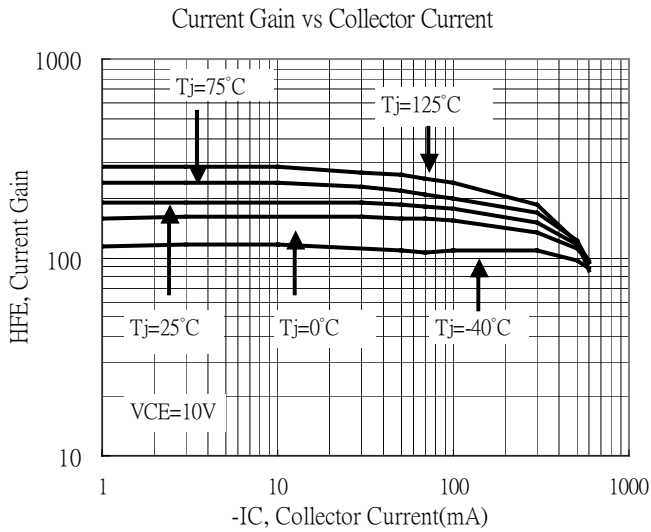


Typical Characteristics(Cont.)

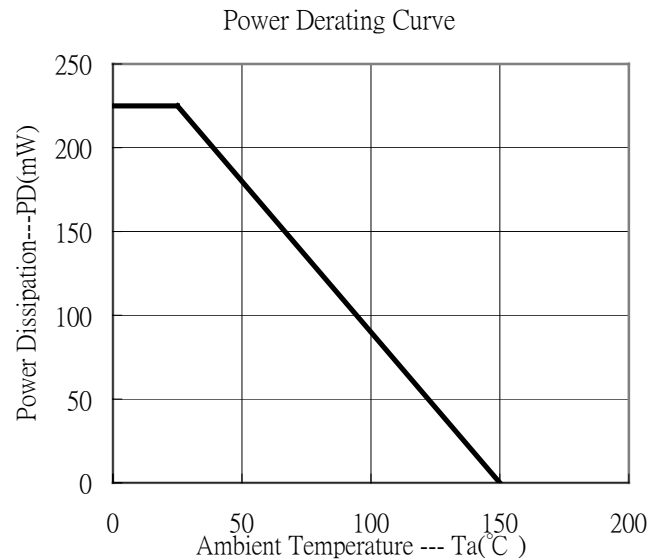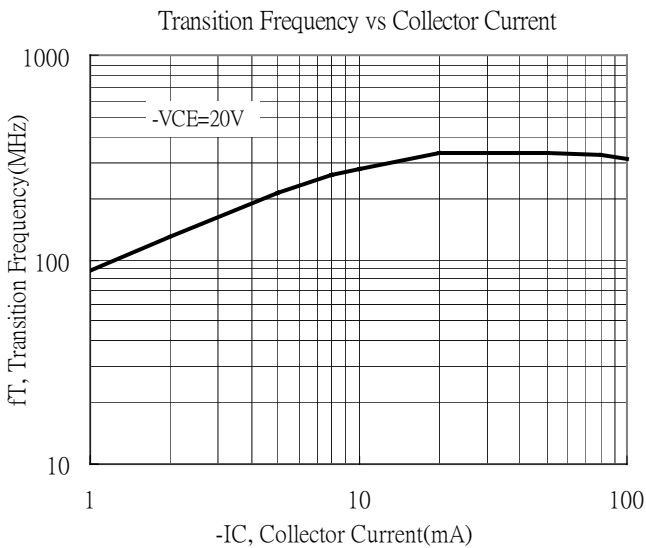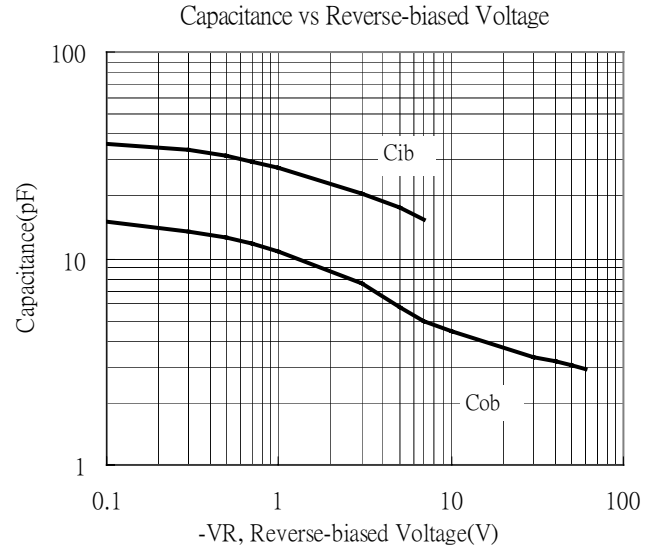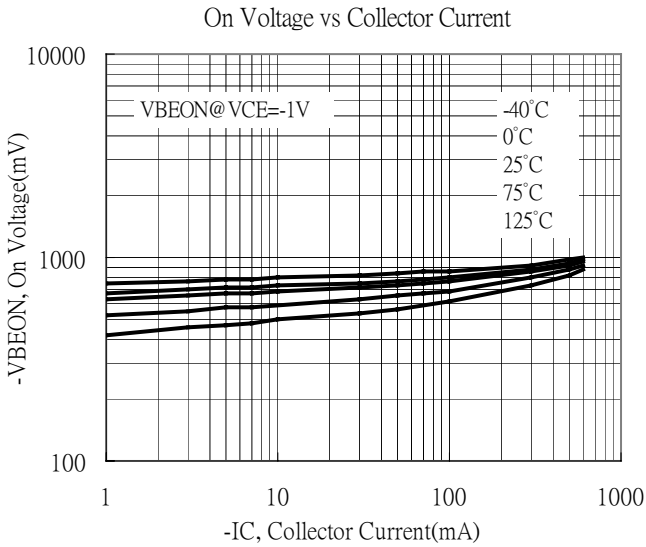


Recommended Soldering Footprint

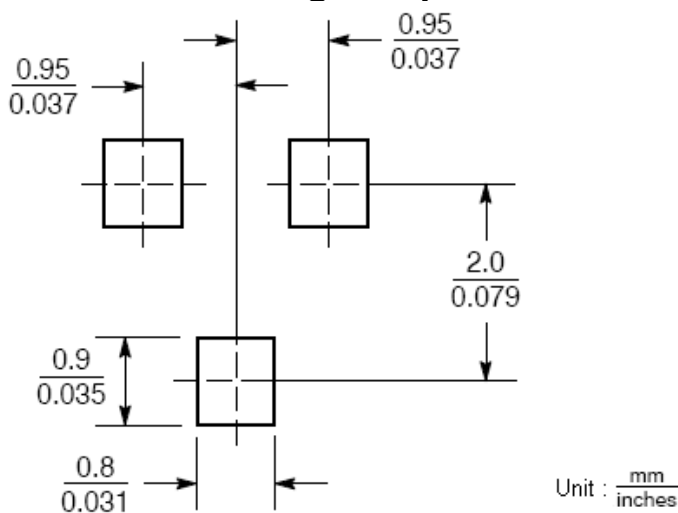

Reel Dimension

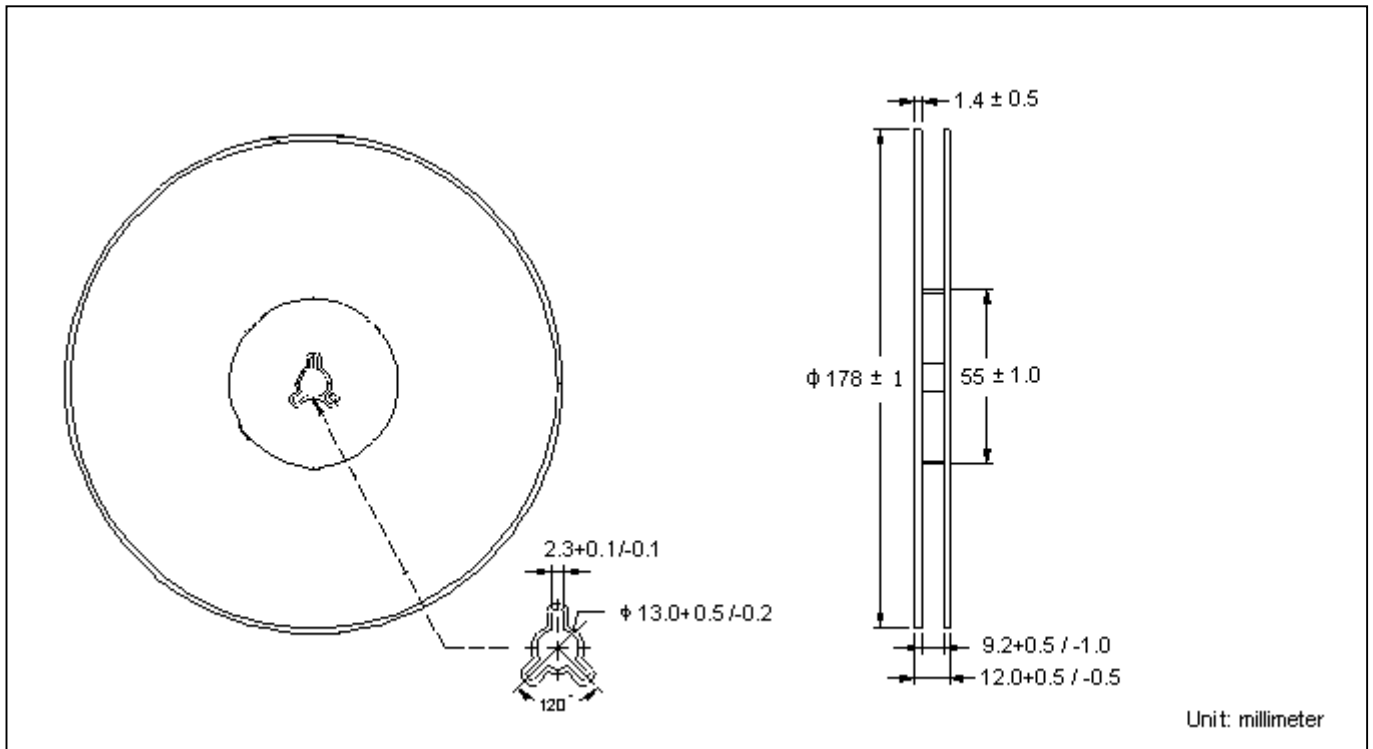

Carrier Tape Dimension

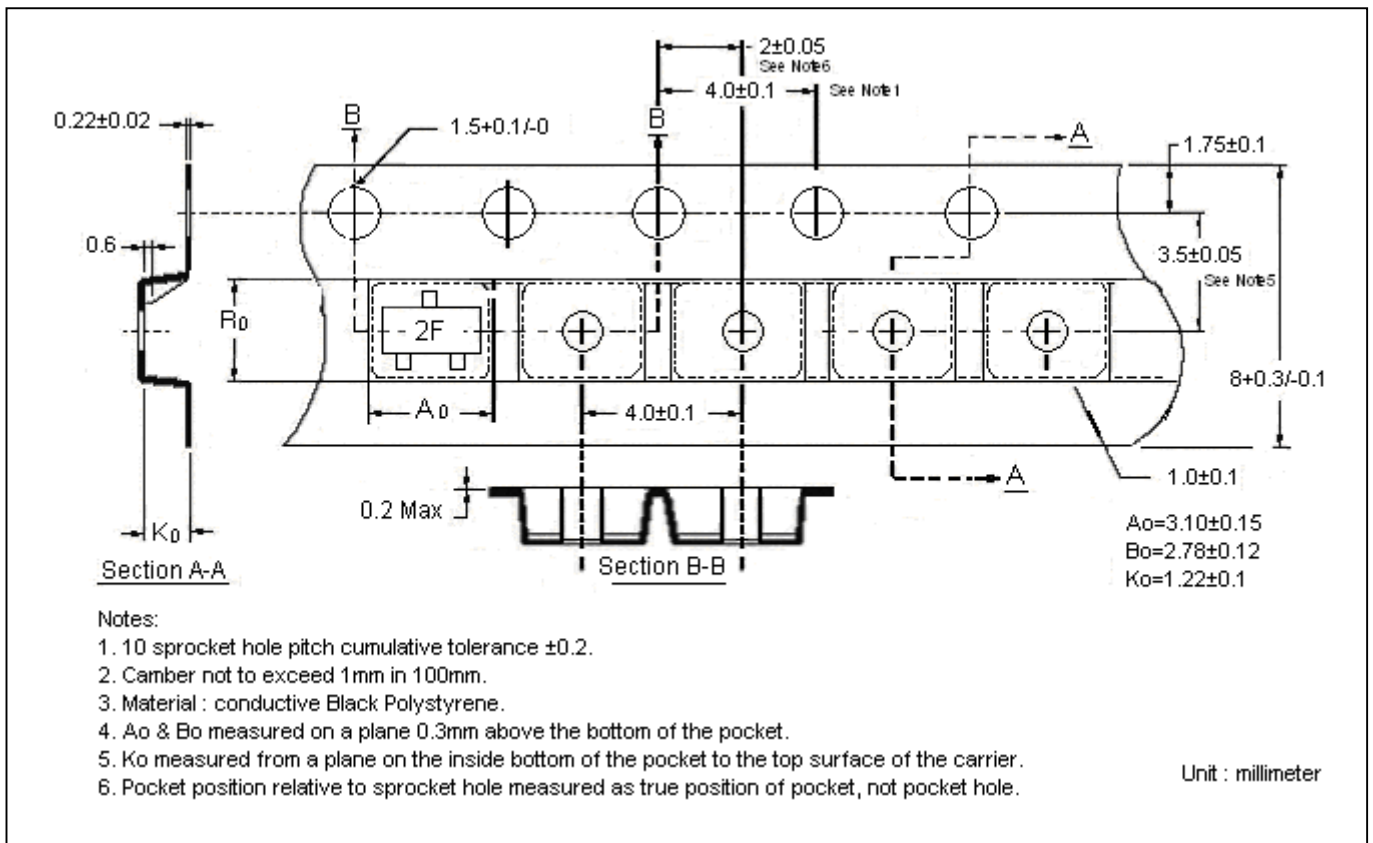




Recommended wave soldering condition

Product	Peak Temperature	Soldering Time
Pb-free devices	260 +0/-5 °C	5 +1/-1 seconds


Recommended temperature profile for IR reflow

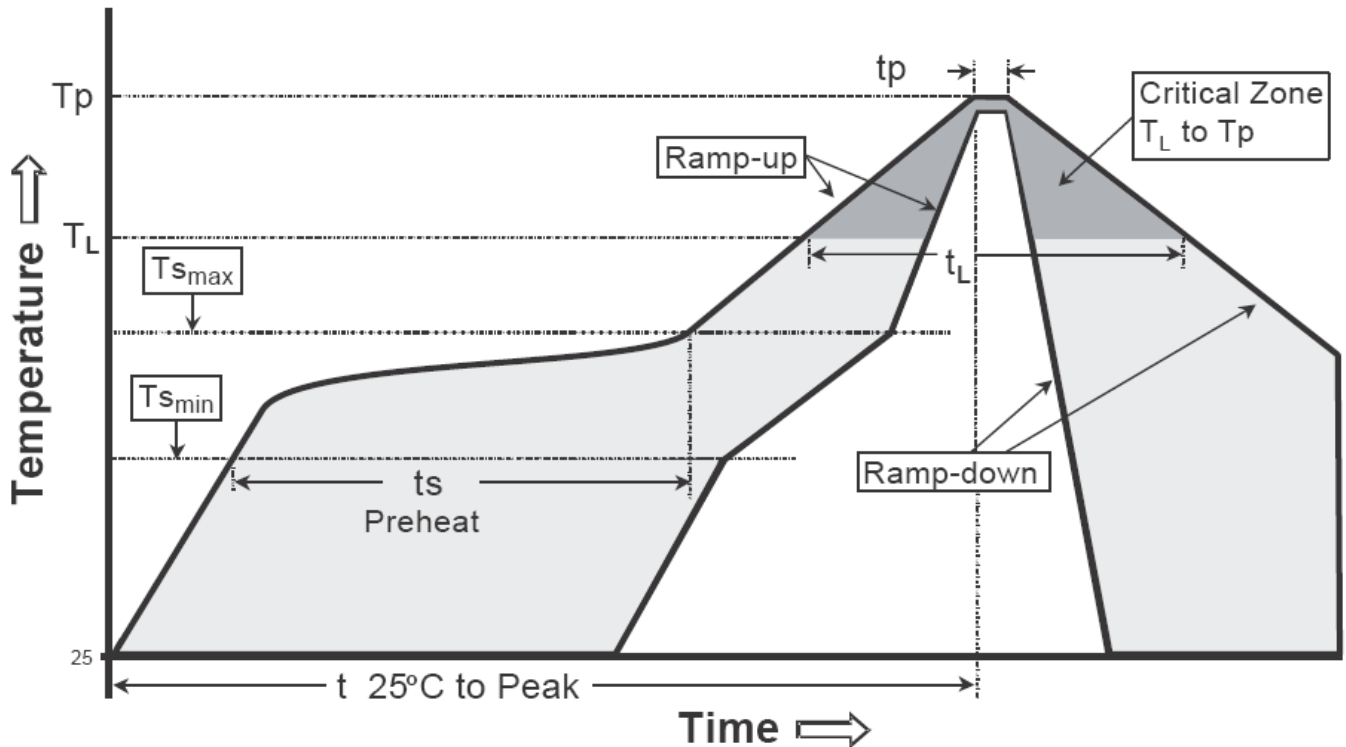

Profile feature	Sn-Pb eutectic Assembly	Pb-free Assembly
Average ramp-up rate (T _{smax} to T _p)	3°C/second max.	3°C/second max.
Preheat		
-Temperature Min(T _{s min})	100°C	150°C
-Temperature Max(T _{s max})	150°C	200°C
-Time(t _{s min} to t _{s max})	60-120 seconds	60-180 seconds
Time maintained above:		
-Temperature (T _L)	183°C	217°C
- Time (t _L)	60-150 seconds	60-150 seconds
Peak Temperature(T _P)	240 +0/-5 °C	260 +0/-5 °C
Time within 5°C of actual peak temperature(tp)	10-30 seconds	20-40 seconds
Ramp down rate	6°C/second max.	6°C/second max.
Time 25 °C to peak temperature	6 minutes max.	8 minutes max.


Note : All temperatures refer to topside of the package, measured on the package body surface.

SOT-23 Dimension

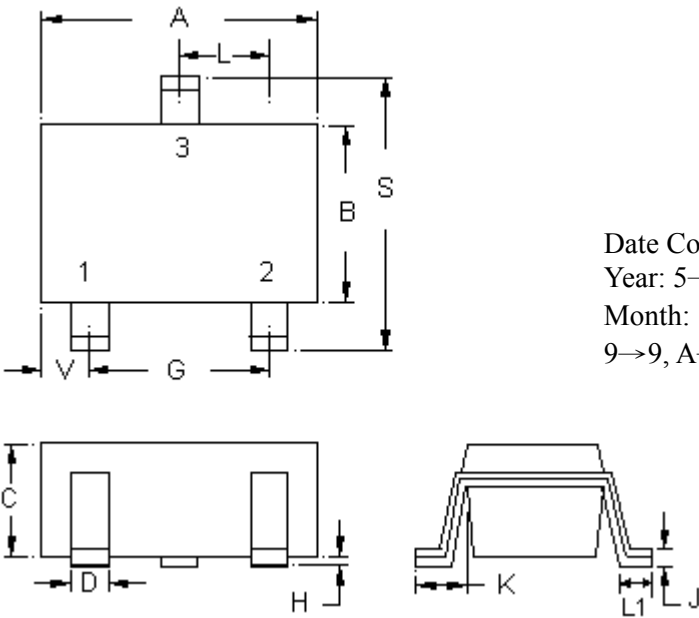

The diagram shows three views of the SOT-23 package: a top view with dimensions A, B, C, G, L, S, V, and pin numbers 1, 2, 3; a side view with dimensions C, D, H, J; and a perspective view with dimensions K, L1, L2.

Marking:

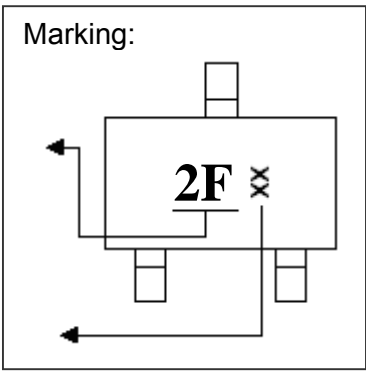

The marking diagram shows a rectangular package with three leads. The top lead is labeled '2F' with a small 'x' symbol to its right. Arrows indicate the lead positions.

Product Code

Date Code: Year+Month
 Year: 5→2015, 6→2016
 Month: 1→1, 2→2, . . .
 9→9, A→10, B→11, C→12

3-Lead SOT-23 Plastic Surface Mounted Package
 CYStek Package Code: N3

Style : Pin 1.Base 2.Emitter 3.Collector

DIM	Inches		Millimeters		DIM	Inches		Millimeters	
	Min.	Max.	Min.	Max.		Min.	Max.	Min.	Max.
A	0.1102	0.1204	2.80	3.04	J	0.0032	0.0079	0.08	0.20
B	0.0472	0.0669	1.20	1.70	K	0.0118	0.0266	0.30	0.67
C	0.0335	0.0512	0.89	1.30	L	0.0335	0.0453	0.85	1.15
D	0.0118	0.0197	0.30	0.50	S	0.0830	0.1161	2.10	2.95
G	0.0669	0.0910	1.70	2.30	V	0.0098	0.0256	0.25	0.65
H	0.0000	0.0040	0.00	0.10	L1	0.0118	0.0197	0.30	0.50

Notes : 1.Controlling dimension : millimeters.
 2.Maximum lead thickness includes lead finish thickness, and minimum lead thickness is the minimum thickness of base material.
 3.If there is any question with packing specification or packing method, please contact your local CYStek sales office.

Material :

- Lead : Pure tin plated.
- Mold Compound : Epoxy resin family, flammability solid burning class:UL94V-0.

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of CYStek.
- CYStek reserves the right to make changes to its products without notice.
- CYStek **semiconductor products are not warranted to be suitable for use in Life-Support Applications, or systems.**
- CYStek assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.