


60V Radiation Tolerant power MOSFET

BUP06CN035L-01

Features

- LOW $R_{DS(on)}$
- Single Event Effect (SEE) tolerant
- Total Ionisation Dose (TID) tolerant
30 kRad approved
- N-channel

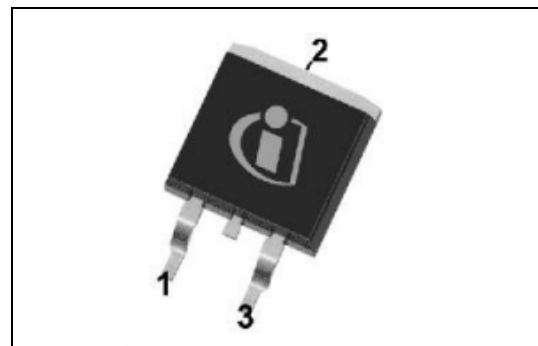

Product validation



Qualified according AEC Q101

Electrical parameters in Table 4 are guaranteed pre- and post-irradiation.

Description

Table 1 Product information

Type	Comment	Pin Configuration			Package
		1	2	3	
BUP06CN035L-01		G	D	S	D ² PAK (TO263)

Table of contents

Features 1

Product validation 1

Description 1

Table of contents 2

1 Maximum ratings 3

2 Thermal characteristics 4

3 Electrical characteristics 5

4 Electrical characteristics diagrams 6

5 Package outlines 10

Maximum ratings

1 Maximum ratings

Table 2 Maximum ratings

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Drain source voltage	V_{DS}	-	-	60	V	
Gate source voltage	V_{GS}	-20	-	20	V	static
Drain gate voltage	V_{DG}	-	-	60	V	
Continuous drain current ¹	I_D	-	-	52 33	A	$T_C = 25\text{ °C}$ $T_C = 100\text{ °C}$
Continuous source current	I_S	-	-	52	A	
Drain current pulsed	I_{DM}	-	-	162	Apk	t_p limited by $T_{j,max}$
Total power dissipation ²	P_{tot}	-	-	150	W	$T_C \leq 25\text{ °C}$
Operating temperature	T_{op}	-40	-	125	°C	
Storage temperature	T_{stg}	-55	-	150	°C	
Junction temperature	T_j	-40	-	150	°C	
Avalanche energy, single pulse	E_{AS}	-	-	550	mJ	$V_{DD} = 50V, L = 108\mu H$

¹ Limited by $T_{j,max}$

² For $T_C > 25\text{ °C}$ derating is required.

Thermal characteristics

2 Thermal characteristics

Table 3 Thermal characteristics

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Thermal resistance, junction - case	$R_{th,JC}$	-	-	0.83	K/W	
Thermal resistance, junction - ambient	$R_{th,JA}$	-	-	62	K/W	Device on PCB, minimal footprint
		-	35	-		Device on 40mm*40mm *1.5mm epoxy PCB FR4 with 6cm ² (one layer, 70μm thickness) copper area for drain connection and cooling. PCB is vertical without air stream cooling
Soldering temperature	T_{sol}	-	-	260	°C	Reflow MSL 1

Electrical characteristics

3 Electrical characteristics

at $T_A=25^\circ\text{C}$, unless otherwise specified

Table 4 Static characteristics



Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Drain-source breakdown voltage	BV_{DSS}	60	-	-	V	$I_D = 0.25\text{mA}$, $V_{GS} = 0\text{V}$
Gate threshold voltage	$V_{GS(th)}$	2	-	4	V	$I_D = 1.0\text{mA}$, $V_{DS} \geq V_{GS}$
Gate to source leakage current	I_{GSS}	-100 -200	-	100 200	nA	$V_{DS} = 0\text{V}$, $V_{GS} = \pm 20\text{V}$, $T_A = 25^\circ\text{C}$ $V_{DS} = 0\text{V}$, $V_{GS} = \pm 20\text{V}$, $T_A = 125^\circ\text{C}$
Zero gate voltage drain current	I_{DSS}	-	-	25 250	μA	$V_{DS} = 48\text{V}$, $V_{GS} = 0\text{V}$, $T_A = 25^\circ\text{C}$ $V_{DS} = 48\text{V}$, $V_{GS} = 0\text{V}$, $T_A = 125^\circ\text{C}$
Drain source on-state resistance ¹	$R_{DS(ON)}$	-	27	35 45	$\text{m}\Omega$	$V_{GS} = 10\text{V}$, $I_D = 23\text{A}$, $T_A = 25^\circ\text{C}$ $V_{GS} = 10\text{V}$, $I_D = 23\text{A}$, $T_A = 125^\circ\text{C}$
Diode forward voltage ^{1,2}	V_{SD}	-	-	1.2	V	$V_{GS} = 0\text{V}$, $I_S = 35\text{A}$

Table 5 Dynamic characteristics



Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Turn-on delay time	$t_{d(ON)}$	-	12	-	ns	$V_{DD} = 50\% V_{DS}$, $I_D = 23\text{A}$, $R_G = 4.7\Omega$
Rise time	t_r	-	10	-	ns	$V_{DD} = 50\% V_{DS}$, $I_D = 23\text{A}$, $R_G = 4.7\Omega$
Turn-off delay time	$t_{d(OFF)}$	-	19	-	ns	$V_{DD} = 50\% V_{DS}$, $I_D = 23\text{A}$, $R_G = 4.7\Omega$
Fall time	t_f	-	8	-	ns	$V_{DD} = 50\% V_{DS}$, $I_D = 23\text{A}$, $R_G = 4.7\Omega$
Reverse recovery time	t_{rr}	-	130	-	ns	$V_{DD} \leq 50\text{V}$, $I_D = 35\text{A}$
Common source input capacitance	C_{iss}	-	1.58	-	nF	$V_{DS} = 40\text{V}$, $V_{GS} = 0\text{V}$, $f = 1.0\text{MHz}$
Common source output capacitance	C_{oss}	-	416	-	pF	$V_{DS} = 40\text{V}$, $V_{GS} = 0\text{V}$, $f = 1.0\text{MHz}$
Common source reverse transfer capacitance	C_{rss}	-	110	-	pF	$V_{DS} = 40\text{V}$, $V_{GS} = 0\text{V}$, $f = 1.0\text{MHz}$
Total gate charge	Q_G	-	26	-	nC	$V_{DD} = 50\% V_{DS}$, $V_{GS} = 10\text{V}$, $I_D = 35\text{A}$

¹ Pulsed measurement: Pulse Width < 300 μs , Duty Cycle < 2.0%.² Measured within 2.0 mm of case

4 Electrical characteristics diagrams

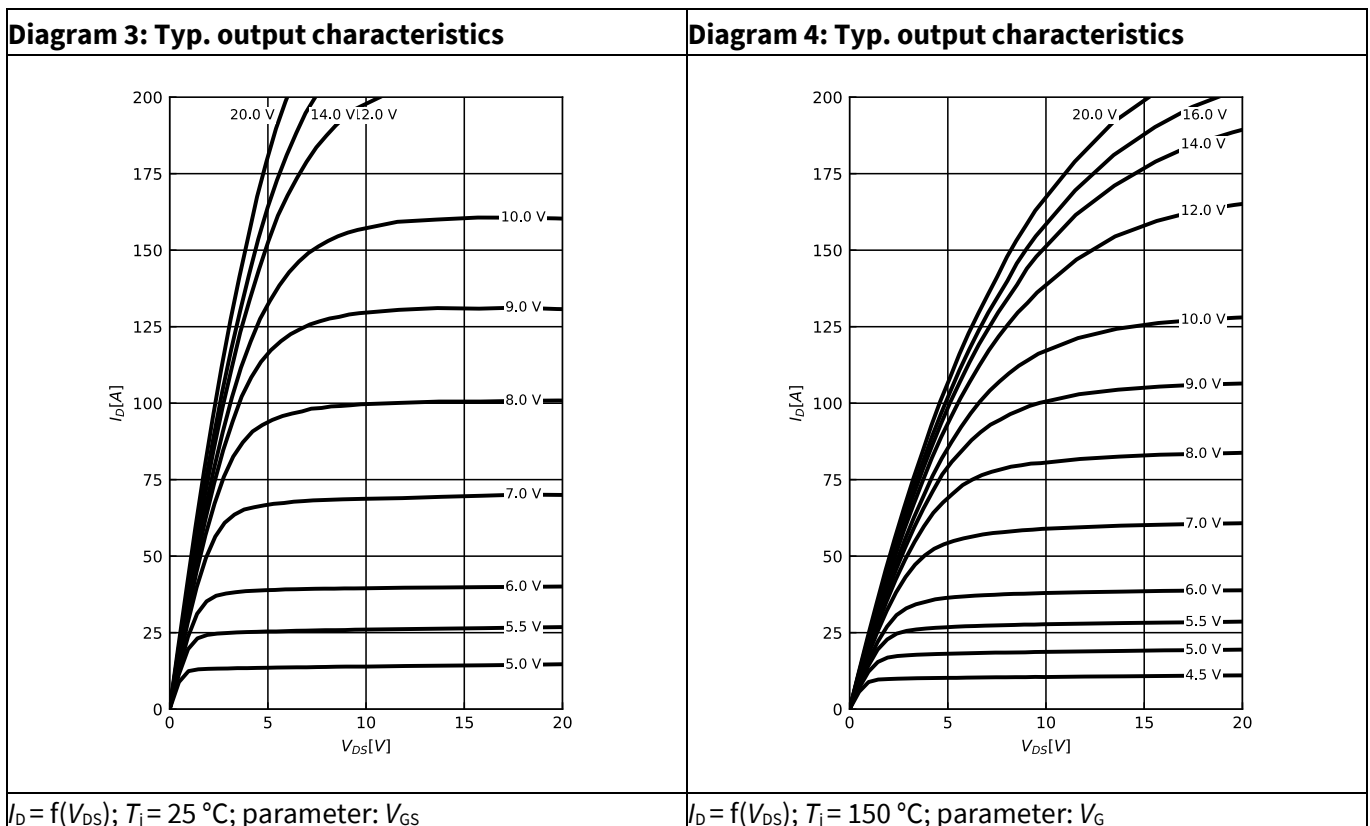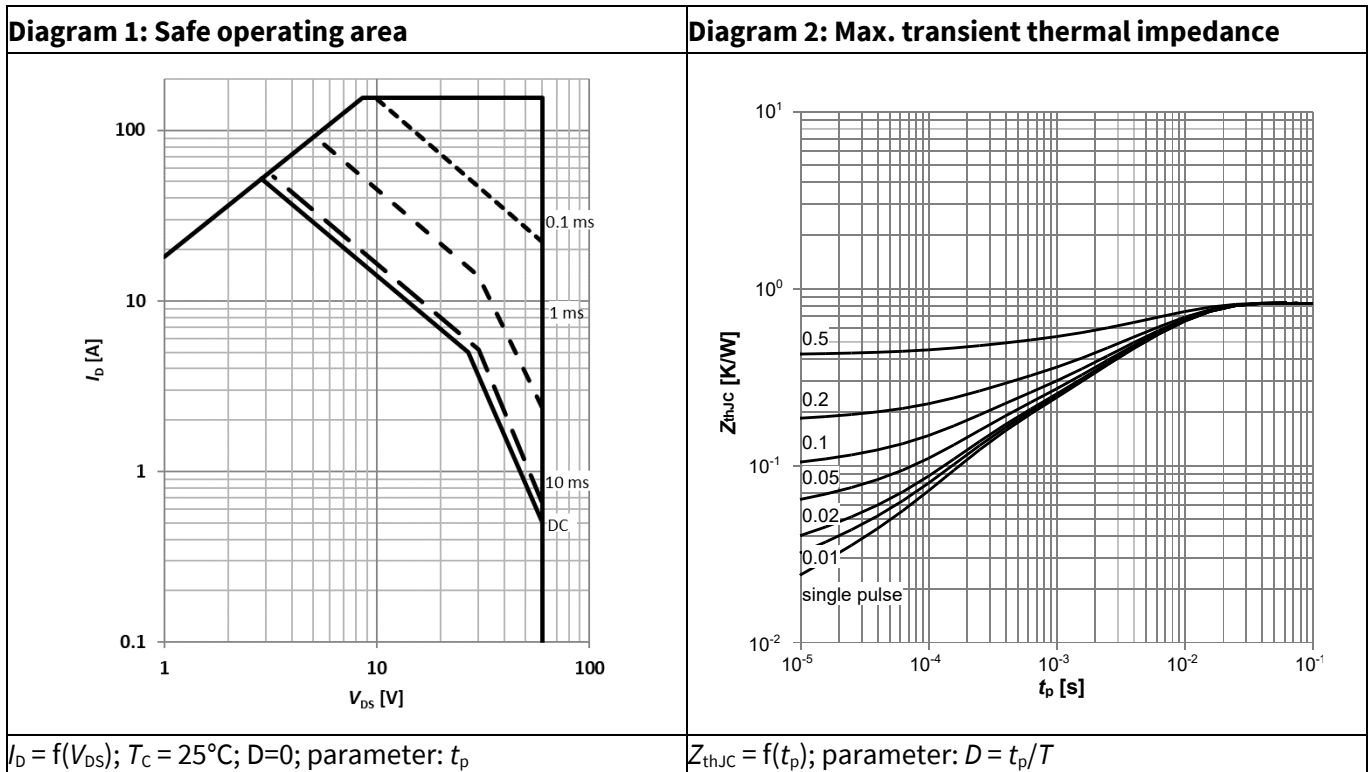


Electrical characteristics diagrams

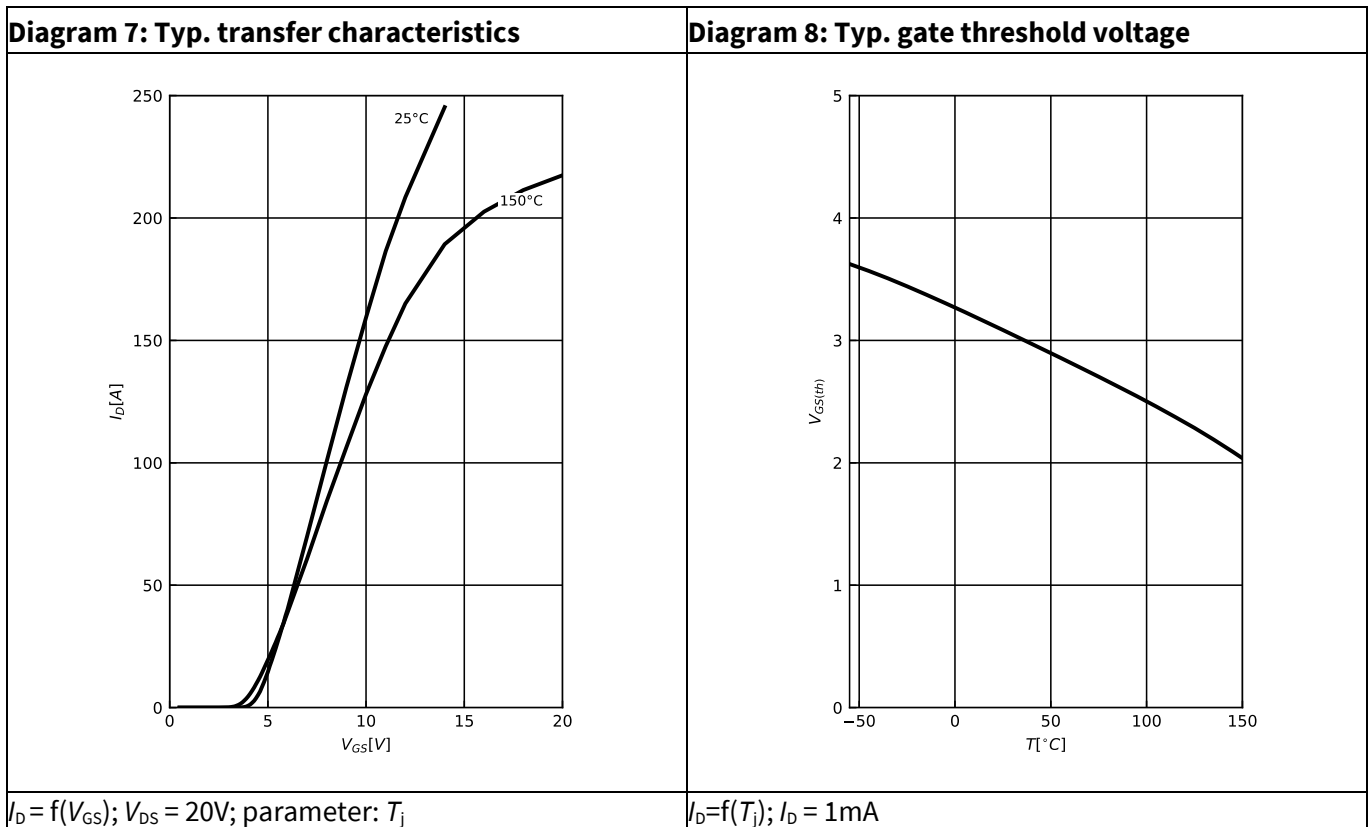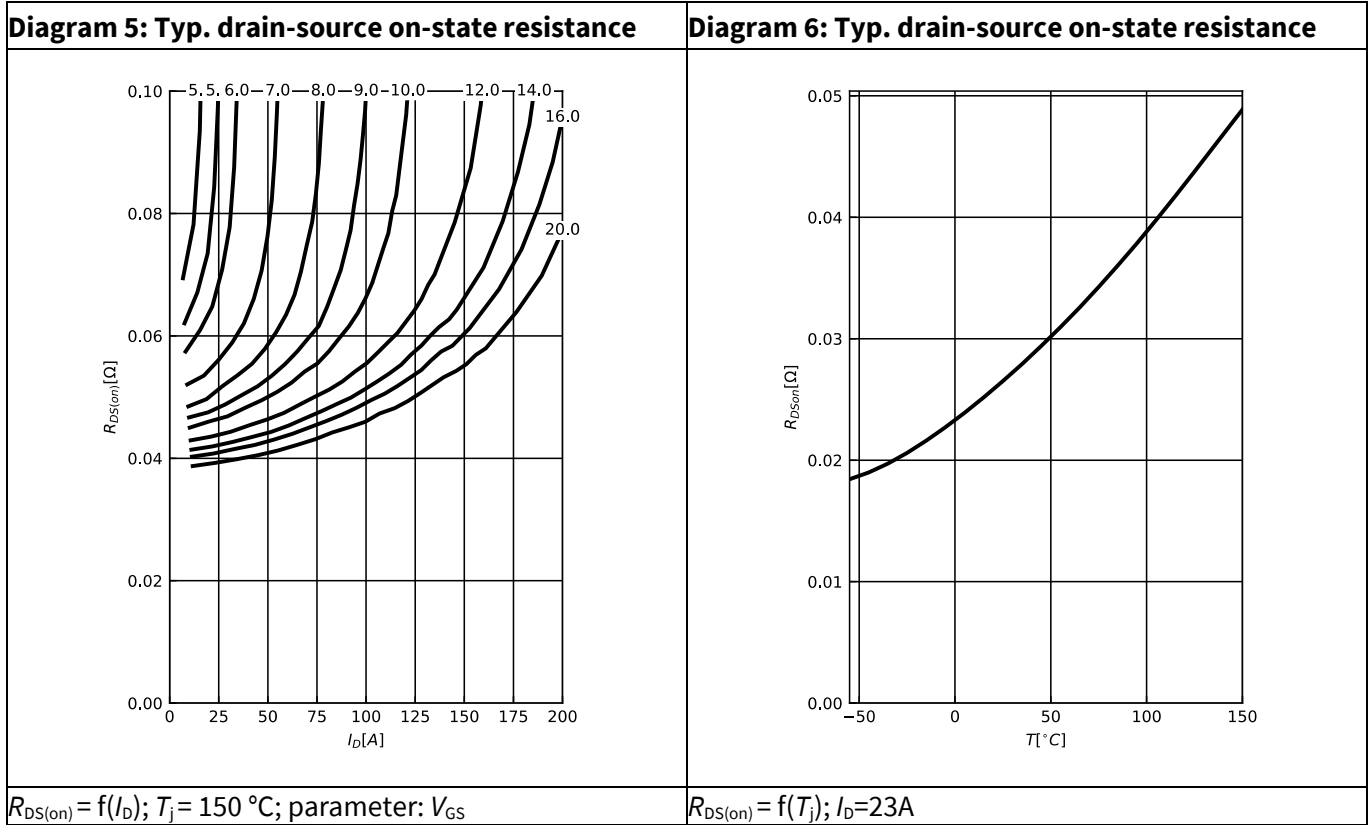


Electrical characteristics diagrams

Diagram 9: Forward characteristics of reverse diode

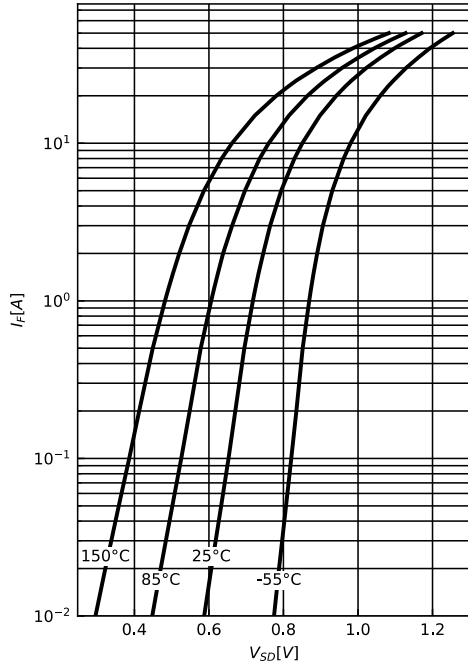


$I_F = f(V_{SD});$ parameter: T_j

Diagram 10: Drain-source breakdown voltage

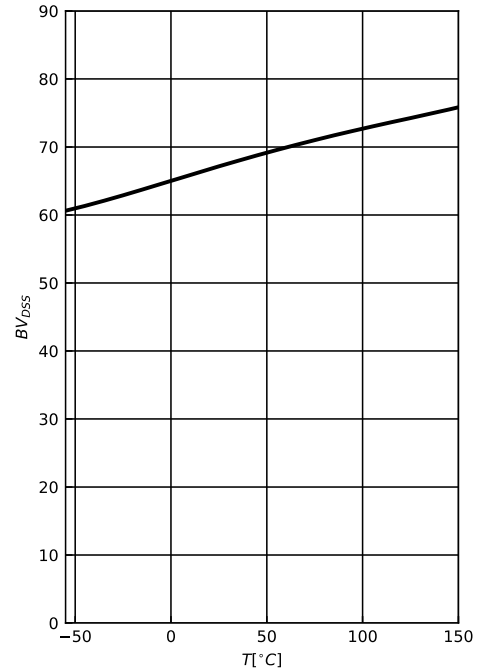


$BV_{DSS} = f(T_j); I_D = 250\mu A$

Diagram 11: Typ. capacitances

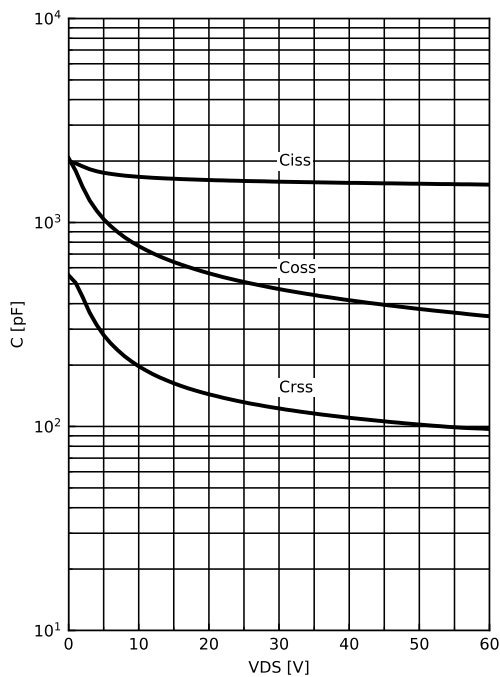

$C = f(V_{DS}); V_{GS} = 0 V; f = 1 MHz$


Diagram 12: Typ. gate charge

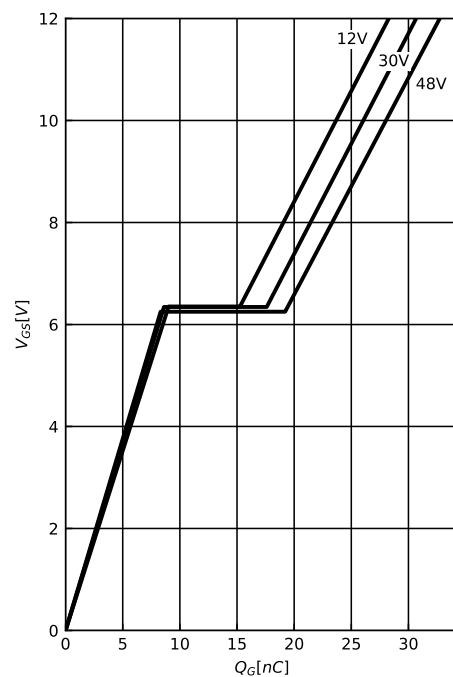


$V_{GS} = f(Q_{gate}); I_D = 35.0 A$ pulsed; parameter: V_{DD}

Electrical characteristics diagrams

Diagram 13: SEE - Safe operating area

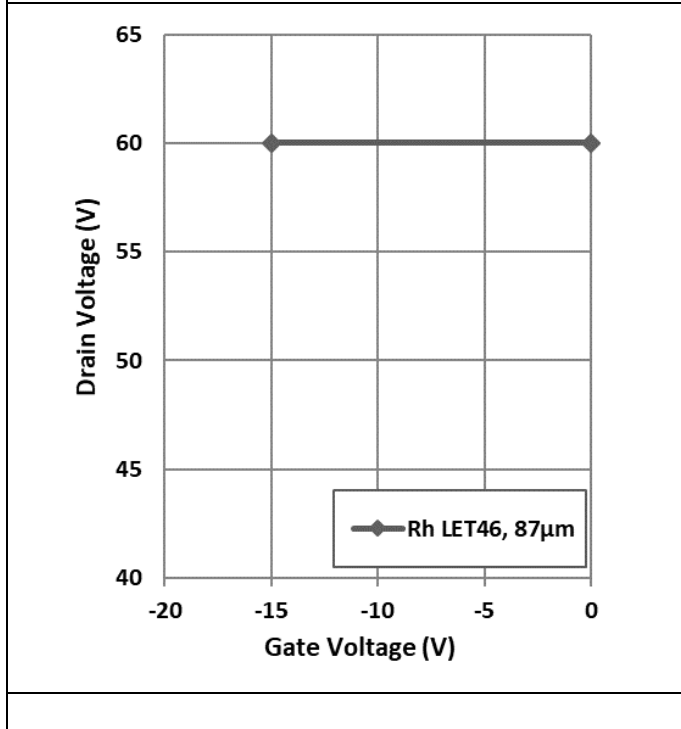

5 Package outlines

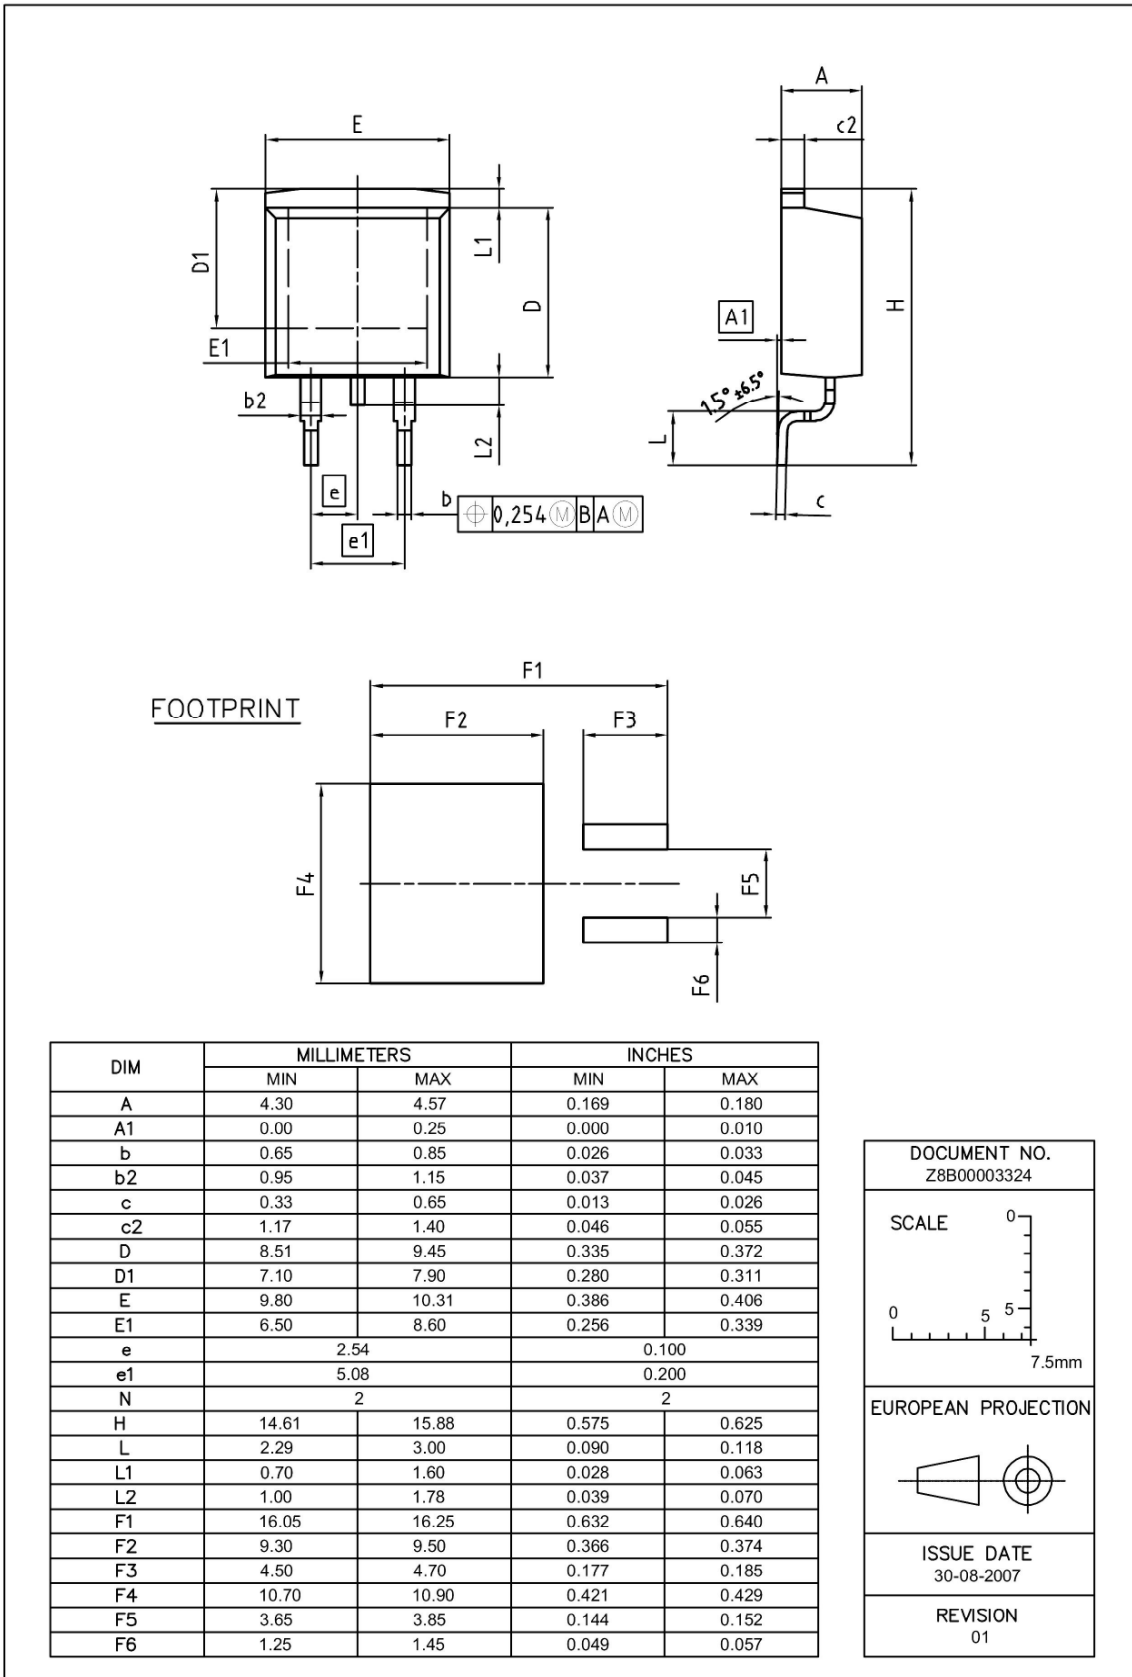

60V Radiation Tolerant power MOSFET

BUP06CN035L-01

Package outlines



Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2, February 2024

Published by

Infineon Technologies AG

81726 München, Germany

© 2024 Infineon Technologies AG.

All Rights Reserved.

Do you have a question about this document?

Email: erratum@infineon.com

IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office (www.infineon.com).

WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Infineon Technologies Components may only be used in life-support devices or systems with the expressed written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system.

Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.