




BVS-301RW4C


PACKAGE CONFIGURATION

DESCRIPTION


Dice Material : AlGaInP/GaAs Red
Light Color : Red Color
Lens Color : Water Transparent

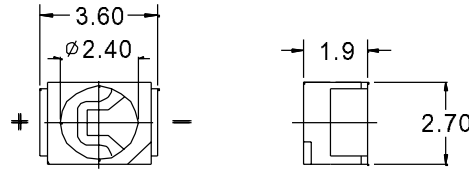

RADIATION PATTERN

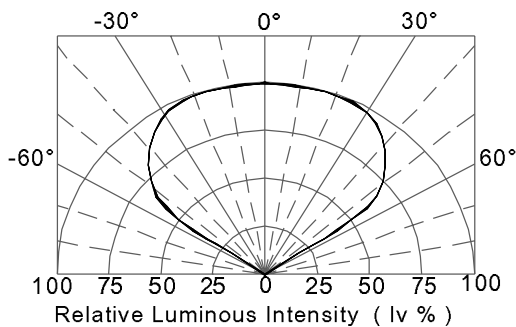

INFRARED/VAPOR PHASE REFLOW SOLDERING

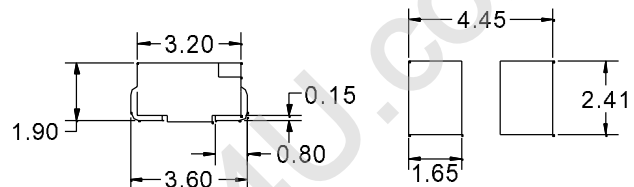

Tolerance ± 0.25 mm

ABSOLUTE MAXIMUM RATINGS AT Ta = 25 °C

PARAMETER	MAX.	UNIT
Power Dissipation	95	mW
Continuous Forward Current	35	mA
Peak Forward Current (1/10 Duty Cycle , 0.1ms Pulse Width)	80	mA
Reverse Voltage	5	V
Derating Linear From 50 °C	0.35	mA/°C
Operating Temperature Range	-40 to +100	°C
Storage Temperature Range	-40 to +100	°C
Reflow Soldering Condition 230 °C for 10 seconds		

ELECTRICAL / OPTICAL CHARACTERISTICS AT Ta = 25 °C

SYMBOL	PARAMETER	TEST COND.	MIN.	TYP.	MAX.	UNIT
V _F	Forward Voltage	I _F = 20 mA		2.1	2.6	V
I _R	Reverse Current	V _R = 5V			100	μA
λ _p	Peak Emission Wavelength	I _F = 20 mA		645		nm
λ _d	Dominant Wavelength	I _F = 20 mA		632		nm
2θ _{1/2}	Viewing Angle	I _F = 20 mA		110		Deg

BIN GRADE LIMITS (I F = 20 mA) LUMINOUS INTENSITY / mcd

Bin	w	x	y	z	A	B	C	D
Min.	29	35	42	50	60	70	84	100
Max.	35	42	50	60	70	84	100	118

Tolerance $\pm 15\%$ mcd

*Bright View reserves the rights to alter specifications and remove availability of products at any time without notice.

*Dominant Wavelength, λ_d is according to CIE Chromaticity Diagram base on color of lamps.

*θ_{1/2} is the off-axis angle where the luminous intensity is one half the on-axis intensity.



AlGaInP/GaAs LED

TYPICAL ELECTRICAL/OPTICAL CHARACTERISTIC CURVES

FIG. 1 Forward Current Vs. Forward Voltage

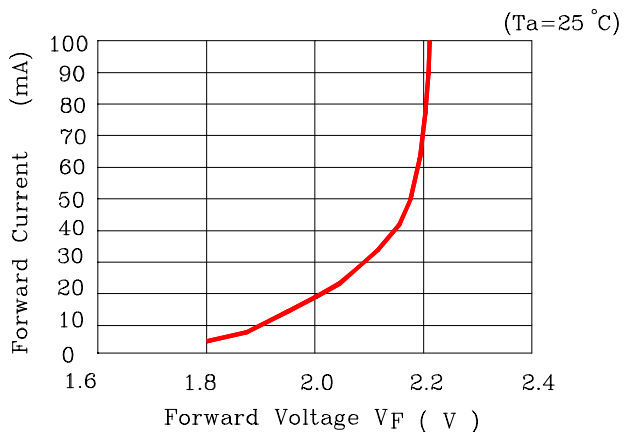


FIG. 2 Relative Intensity Vs. Forward Current

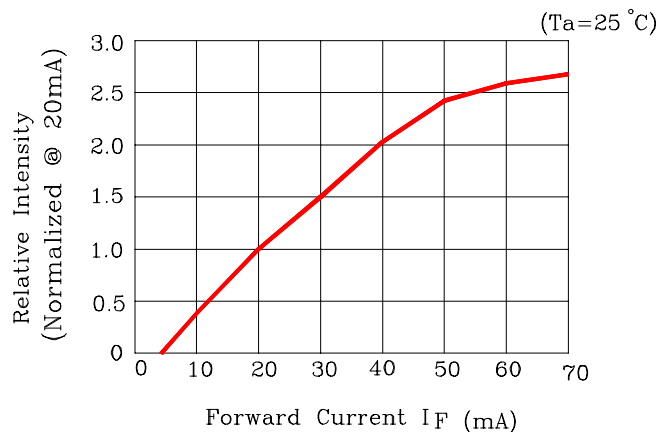


FIG. 3 Forward Voltage VS. Temperature

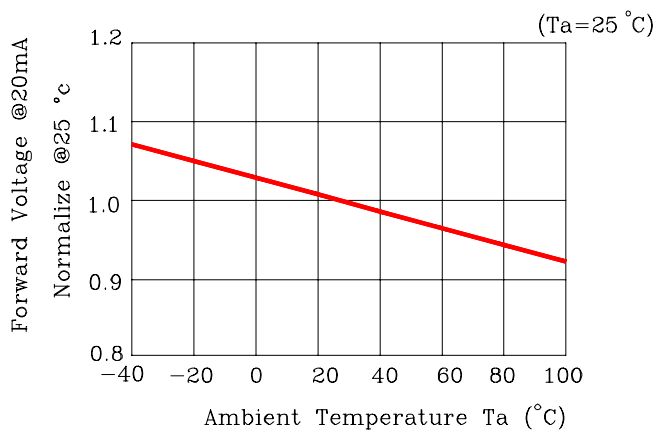


FIG. 4 Relative Intensity vs. Temperature

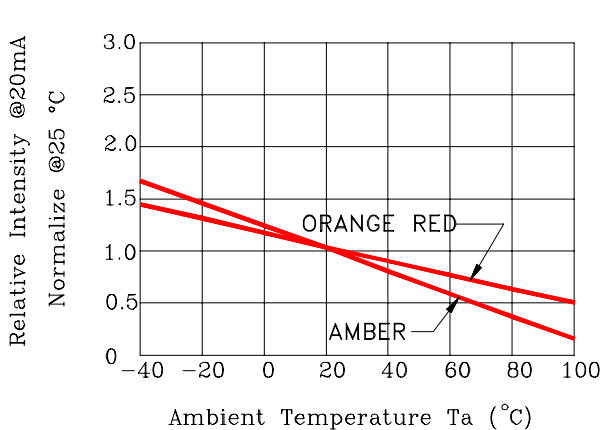


FIG. 5 Relative Intensity vs. Wavelength (λ_p)


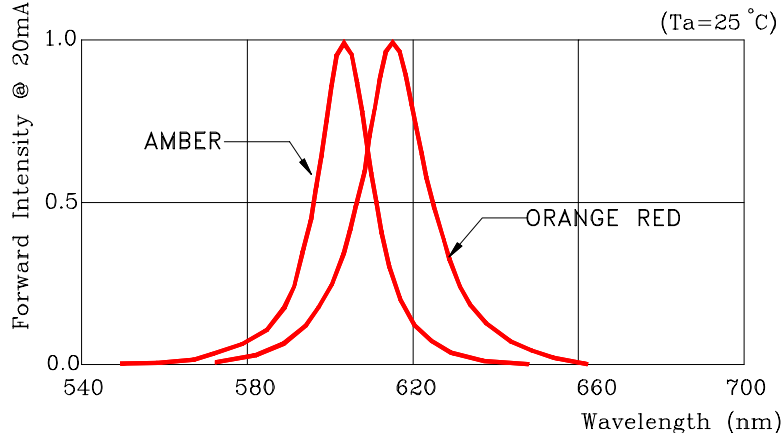


FIG. 6 Maximum Forward Current vs. Ambient Temperature. Derating Based on $T_{MAX}=130^{\circ}C$



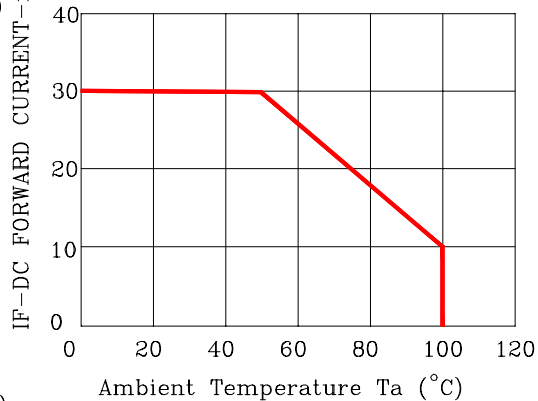

Apply to BVS-3XX ~ BVS-1XX series.


Description:

(1) Manual soldering (We do not recommend this method strongly.)

- (1.1) To prevent cracking, please bake before manual soldering.
- (1.2) Temperature at tip of iron: 300°C Max.(25W)
- (1.3) It's banned to load any stress on the resin during soldering.
- (1.4) Soldering time: 3 sec. Max.(one time only)

(2) Reflow Soldering

- (2.1) When soldering, do not put stress on the LEDs during heating.
- (2.2) Never take next process until the component is cooled down to room temperature after reflow.
- (2.3) After soldering, do not warp the circuit board.
- (2.4) The recommended reflow soldering profile (measuring on the surface of the LED resin) is following:

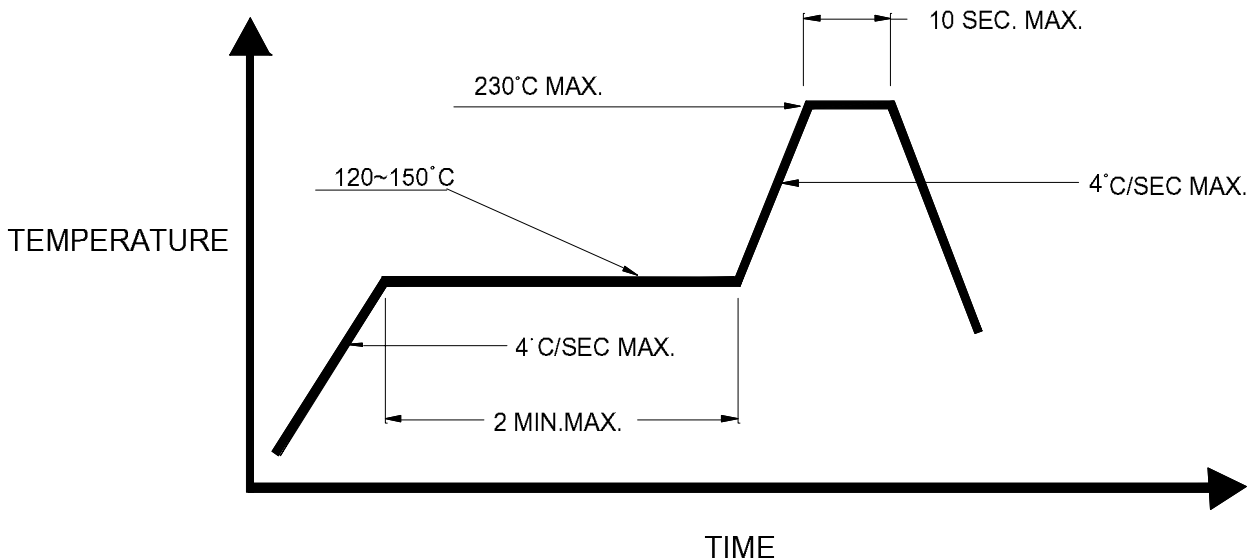



Apply to BVS-3XX · 2XX series.


Description:

(1) Manual soldering (We do not recommend this method strongly.)

- (1.1) To prevent cracking, please bake before manual soldering.
- (1.2) Temperature at tip of iron: 300°C Max.(25W)
- (1.3) It's banned to load any stress on the resin during soldering.
- (1.4) Soldering time: 3 sec. Max.(one time only)

(2) Reflow Soldering




- (2.1) When soldering, do not put stress on the LEDs during heating.
- (2.2) Never take next process until the component is cooled down to room temperature after reflow.
- (2.3) After soldering, do not warp the circuit board.
- (2.4) The recommended reflow soldering profile (measuring on the surface of the LED resin) is following:

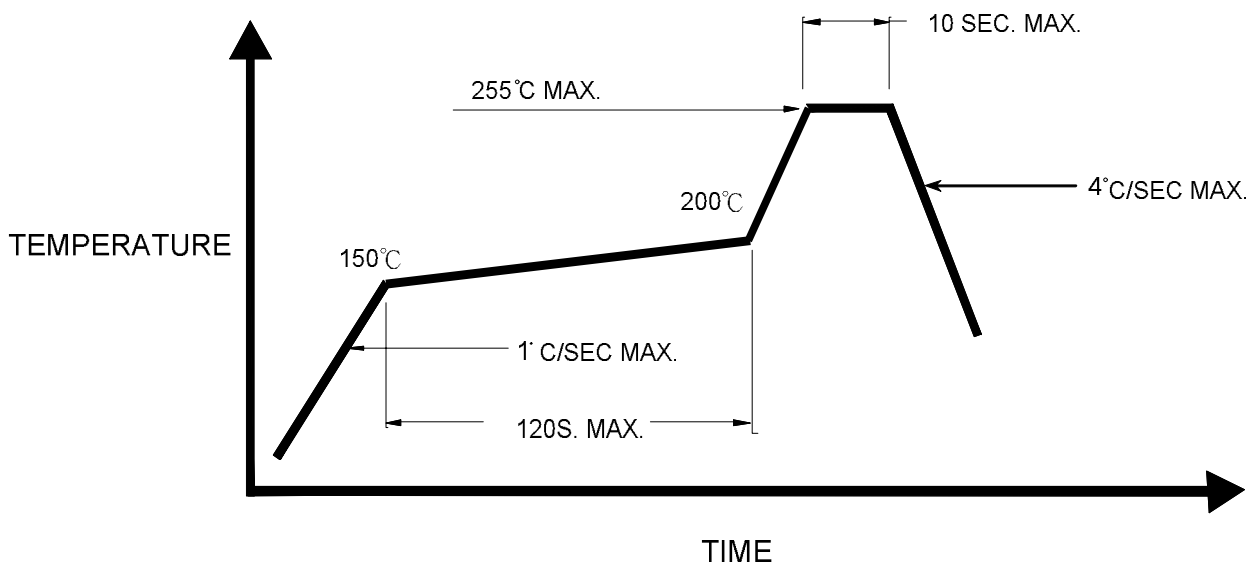


The reflow temperature 245°C~255°C is recommended and the soldering temperature should be not higher than 255°C



TOP LEDS PACKING (A)

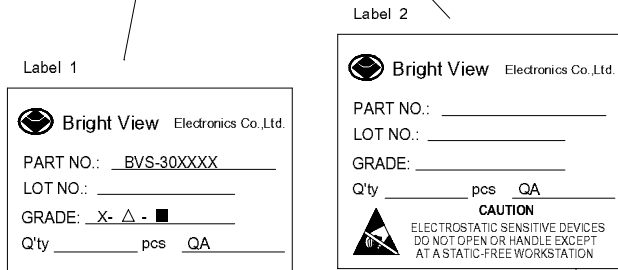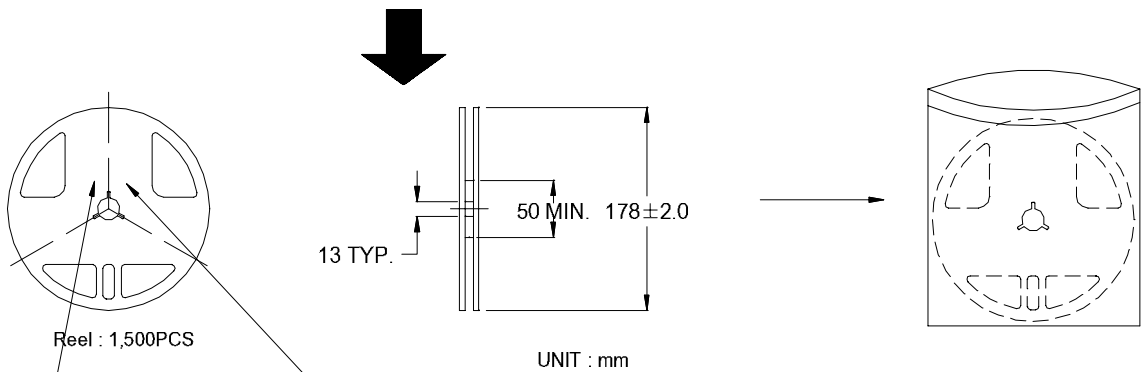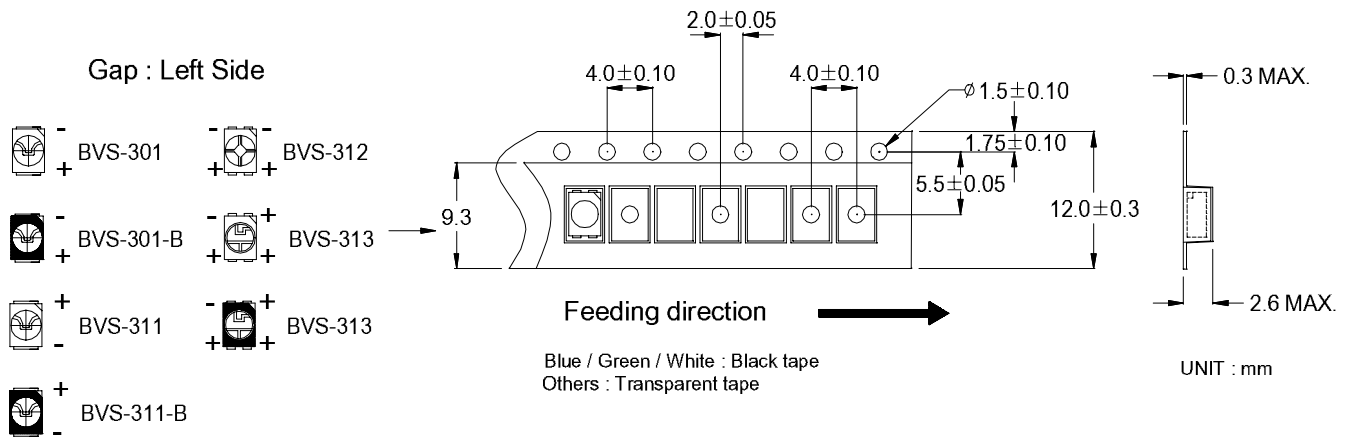

Normal
X: Bin grade
Δ: Wavelength
■: Vf

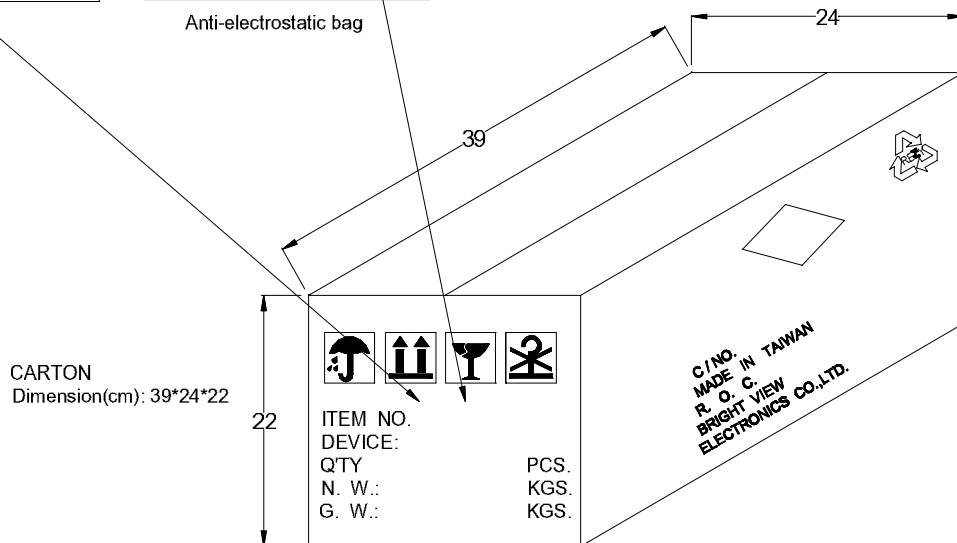

Carton : 20 Reels
Total : 30,000PCS