

Technical Data

DIODE



maximum ratings


Voltage, Reverse (VR)	90.0	V	NO.	BYS26-90
Voltage, Reverse Peak (VRM)	90.0	V	TYPE	SCHOTTKY
Current at VR = 0V (IO)		A		
Current Average Rectified (IF)	3.0	A		
Current Surge Peak (IFM)		A	CASE	DO-201AD
Current, Surge (IFM) at tp = 10 ms	80.0	A		
Max. Power Dissipation (PT) at TC = °C		W		
Max. Thermal Resistance (Rth J-A)	12.0	°C/W		
Max. Junction Temperature (TJ)	125.0	°C		

PERFORMANCE CHARACTERISTICS at $T_c = 25^\circ\text{C}$, unless otherwise noted

NO.	SYMBOL	CONDITIONS	MIN.	MAX.	UNITS
1.	VF	IF = 3.0 A (1)	-	0.8	V
2.	IR	VR = 90.0 V	-	5.0	mA
3.	CT	VR = 5.0 V (2)	-	400.0	pF
4.					
5.					
6.					
7.					
8.					
9.					
10.					
11.					
12.					
13.					
14.					
15.					
16.					
17.					
18.					
19.					
20.					

Notes (1) pulse-tested $t_p \leq 300 \mu\text{s}$, duty cycle $\leq 2\%$
(2) typical value

DIMENSIONS
in mm

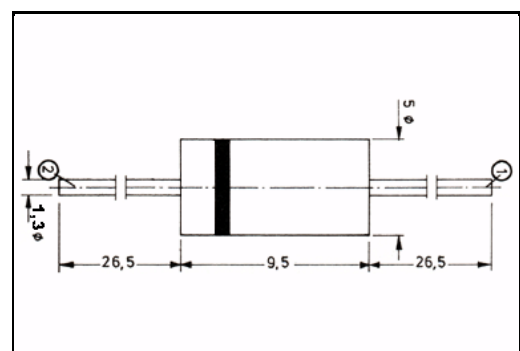

Marking BYS26-90
Customer GENERAL PURPOSE