

BYV95A - BYV96E

PRV : 200 - 1000 Volts
Io : 1.5 Amperes


FEATURES :

- * High current capability
- * High surge current capability
- * High reliability
- * Low reverse current
- * Low forward voltage drop
- * Fast switching for high efficiency
- * **Pb / RoHS Free**

MECHANICAL DATA :

- * Case : DO-15 Molded plastic
- * Epoxy : UL94V-0 rate flame retardant
- * Lead : Axial lead solderable per MIL-STD-202, Method 208 guaranteed
- * Polarity : Color band denotes cathode end
- * Mounting position : Any
- * Weight : 0.4 gram

AVALANCHE FAST RECOVERY RECTIFIER DIODES

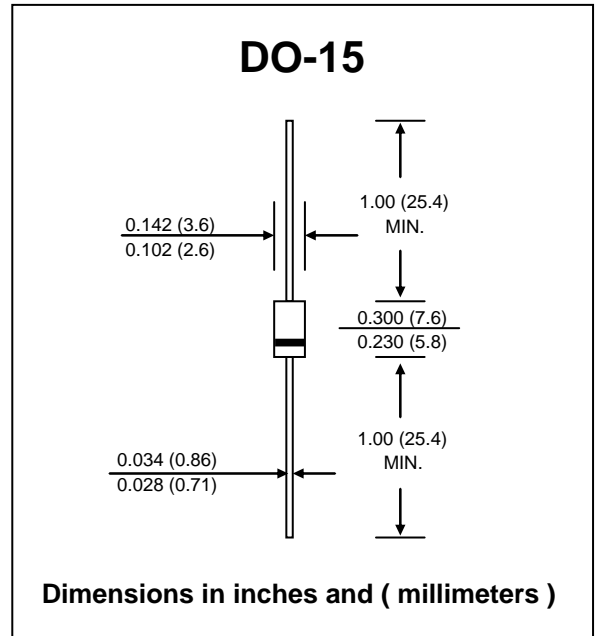

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specific.
Single phase, half wave, 50 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

RATING	SYMBOL	BYV95A	BYV95B	BYV95C	BYV96D	BYV96E	UNIT
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	200	400	600	800	1000	V
Maximum RMS voltage	V _{RMS}	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	200	400	600	800	1000	V
Min. Avalanche Breakdown Voltage @ 100 μA	V _{BR(min.)}	300	500	700	900	1100	V
Maximum Average Forward Rectified Current Lead Length 10 mm. ; T _{tp} = 65 °C	I _{F(AV)}	1.5					A
Peak Forward Surge Current , 10 ms single half sine wave superimposed on rated load	I _{FSM}	35					A
Maximum Forward Voltage at I _F = 3.0 Amps.	V _F	1.6					V
Maximum DC Reverse Current at Rated DC Blocking Voltage	T _J = 25 °C I _R	5.0					μA
	T _J = 165 °C I _{R(H)}	150					μA
Maximum Reverse Recovery Time (Note 1)	T _{rr}	250			300		ns
Typical Thermal Resistance (Note 2)	R _{θJA}	50					°C/W
Junction Temperature Range	T _J	175					°C
Storage Temperature Range	T _{STG}	- 65 to + 175					°C

Notes :

- (1) Measured with F = 0.5A, I_R = 1.0A, I_{rr} = 0.25A
- (2) Thermal resistance from Junction to Ambient at 0.375" (9.5mm) Lead Lengths, P.C. Board Mounte

RATING AND CHARACTERISTIC CURVES (BYV95A - BYV96E)

FIG.1 - REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

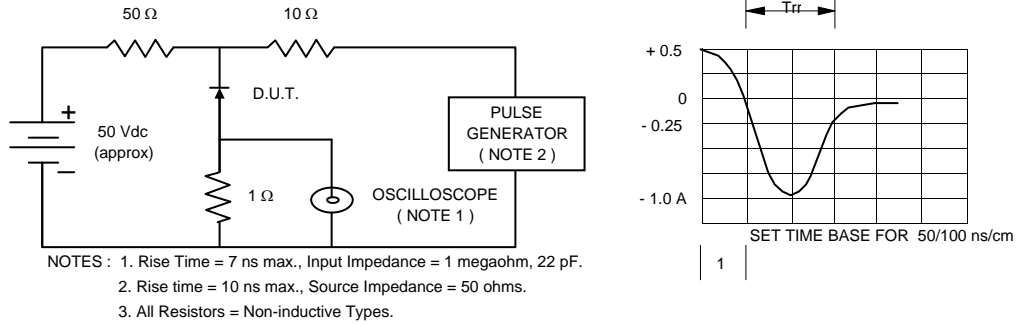


FIG.2 - FORWARD CURRENT DERATING CURVE

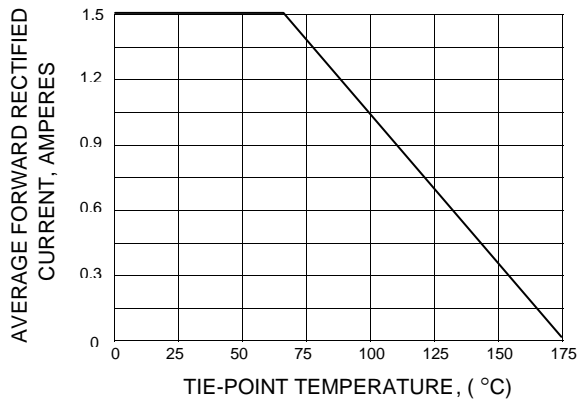


FIG.3 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

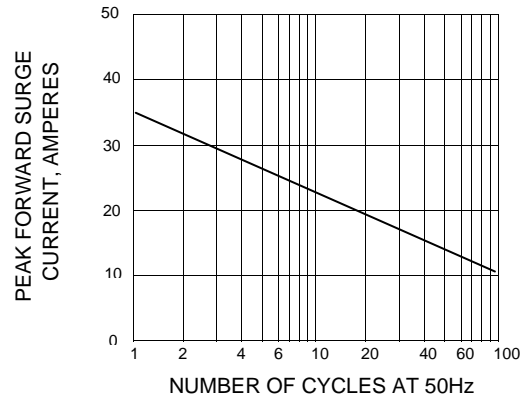


FIG.4 - TYPICAL FORWARD CHARACTERISTICS

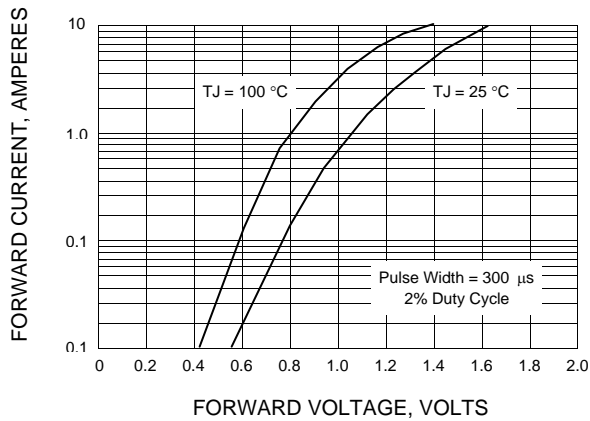


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

