

**Ultrafast Rectifier**

**BYW29-200**

**FEATURES**



- High surge capacity
- Low Forward Voltage
- Low Leakage Current
- 150°C Operating Junction Temperature
- 100% avalanche tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

**APPLICATIONS**

- Power supply-output rectification
- Power management
- Instrumentation

**ABSOLUTE MAXIMUM RATINGS (T<sub>a</sub>=25°C)**

SYMBOL	PARAMETER	VALUE	UNIT
V <sub>RRM</sub> V <sub>RWM</sub> V <sub>R</sub>	Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	200	V
I <sub>F(AV)</sub>	Average Rectified Forward Current	8	A
I <sub>FM</sub>	Peak Repetitive Forward Current	11.3	A
I <sub>FSM</sub>	Nonrepetitive Peak Surge Current (Surge applied at rated load conditions half-wave, single phase, 60Hz)	80	A
T <sub>J</sub>	Junction Temperature	-65~150	°C
T <sub>stg</sub>	Storage Temperature Range	-65~150	°C

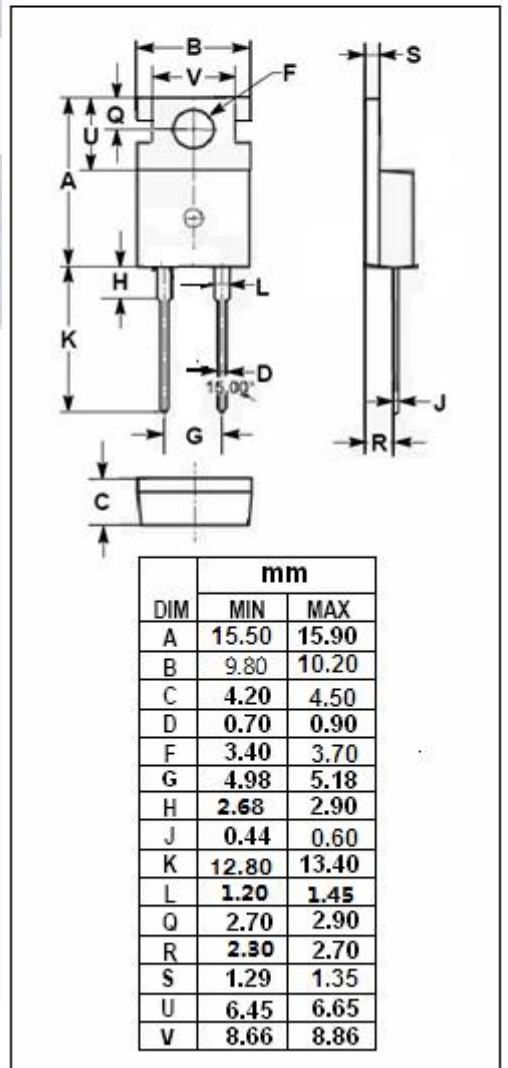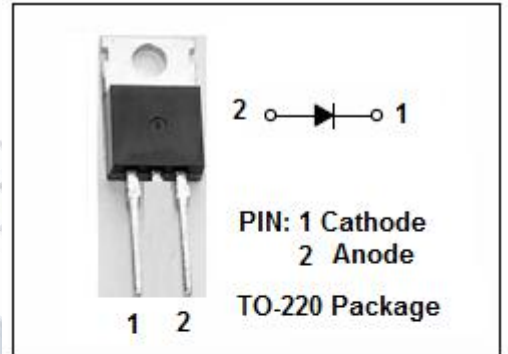

## Fast Recovery Rectifier

## BYW29-200

## THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance, Junction to Case	2.7	$^{\circ}C/W$
$R_{th\ j-a}$	Thermal Resistance, Junction to Ambient	60	$^{\circ}C/W$

ELECTRICAL CHARACTERISTICS ( $T_a=25^{\circ}C$ ) (Pulse Test: Pulse Width=300  $\mu$  s, Duty Cycle  $\leq$  2%)

SYMBOL	PARAMETER	CONDITIONS	MAX	UNIT
$V_F$	Maximum Instantaneous Forward Voltage	$I_F=8A; T_j=150^{\circ}C$ $I_F=8A; T_j=25^{\circ}C$ $I_F=20A; T_j=25^{\circ}C$	0.895 1.05 1.3	V
$I_R$	Maximum Instantaneous Reverse Current	$V_R=V_{RWM}; T_j=100^{\circ}C$ $V_R=V_{RWM}$	600 10	$\mu$ A
$t_{rr}$	Maximum Reverse Recovery Time	$I_F=1A; V_R \geq 30V; di/dt = 100A/\mu s$	25	ns