


Transient Voltage Suppressor

FEATURES

- Excellent clamping capability
- Low impedance surge resistance
- 400W surge capability at 10 / 1000 μ s waveform
- Very fast response time
- Typical I_R less than 1 μ A above 10V
- Compliant to RoHS Directive 2011/65/EU and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21 definition

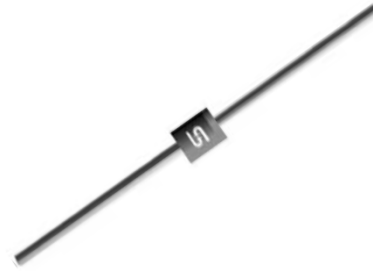

DO-204AL (DO-41)



MECHANICAL DATA

Case: DO-204AL (DO-41)

Molding compound, UL flammability classification rating 94V-0

Base P/N with suffix "G" on packing code - green compound (halogen-free)

Terminal: Matte tin plated leads, solderable per JESD22-B102

Meet JESD 201 class 1A whisker test,

Weight: 0.3g (approximately)

| MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$ unless otherwise noted) | | | |
|---|-----------------|--------------|--------------------|
| PARAMETER | SYMBOL | VALUE | UNIT |
| Peak power dissipation at $T_A=25^\circ\text{C}$, $T_p=1\text{ms}$ (Note 1) | P_{PK} | 400 | Watts |
| Steady state power dissipation at $T_L=75^\circ\text{C}$ lead lengths .375", 9.5mm (Note 2) | P_D | 1 | Watts |
| Peak forward surge current, 8.3 ms single half sine-wave superimposed on rated load (Note 3) | I_{FSM} | 40 | A |
| Junction to leads | $R_{\theta JL}$ | 60 | $^\circ\text{C/W}$ |
| Junction to ambient on printed circuit L lead=10mm | $R_{\theta JA}$ | 100 | $^\circ\text{C/W}$ |
| Operating junction temperature range | T_J | - 55 to +175 | $^\circ\text{C}$ |
| Storage temperature range | T_{STG} | - 55 to +175 | $^\circ\text{C}$ |

Note 1: Non-repetitive Current Pulse Per Fig. 3 and Derated above $T_A=25^\circ\text{C}$ Per Fig. 2

Note 2: Mounted on 5 x 5 mm Copper Pads to Each Terminal

Note 3: 8.3ms Single Half Sine-wave or Equivalent Square Wave, Duty Cycle=4 Pulses Per Minute Maximum

| ORDERING INFORMATION | | | | |
|-----------------------|--------------|---------------------|---------|----------------------------------|
| PART NO. | PACKING CODE | GREEN COMPOUND CODE | PACKAGE | PACKING |
| BZW04-xxx (Note 1) | A0 | Suffix "G" | DO-41 | 3,000 / Ammo box (52mm taping) |
| | R0 | | DO-41 | 5,000 / 13" Paper reel |
| | R1 | | DO-41 | 5,000 / 13" Paper reel (Reverse) |
| | B0 | | DO-41 | 1,000 / Bulk packing |

Note 1: "xxx" defines voltage from 5.8V (BZW04-5V8) to 376V (BZW04-376)

| EXAMPLE | | | | |
|---------------|----------|--------------|---------------------|----------------|
| PREFERRED P/N | PART NO. | PACKING CODE | GREEN COMPOUND CODE | DESCRIPTION |
| BZW04-94 A0 | BZW04-94 | A0 | | |
| BZW04-94 A0G | BZW04-94 | A0 | G | Green compound |

RATINGS AND CHARACTERISTICS CURVES

(TA=25°C unless otherwise noted)

FIG. 1 PEAK PULSE POWER RATING CURVE

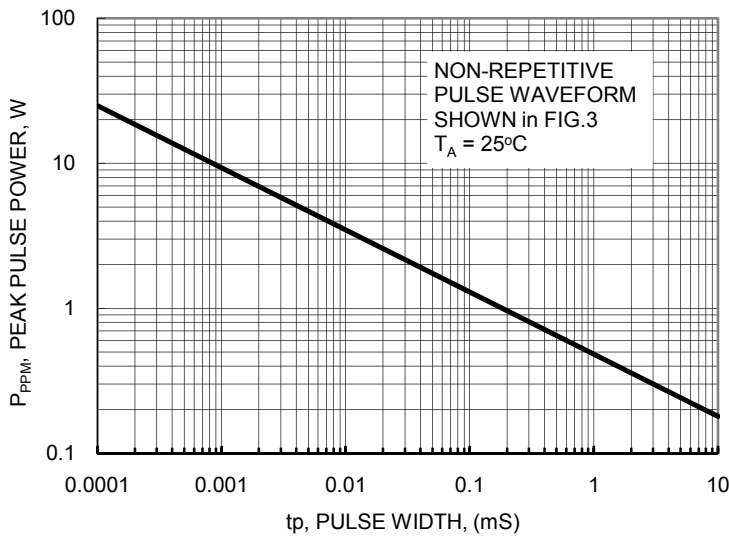


FIG.2 PULSE DERATING CURVE

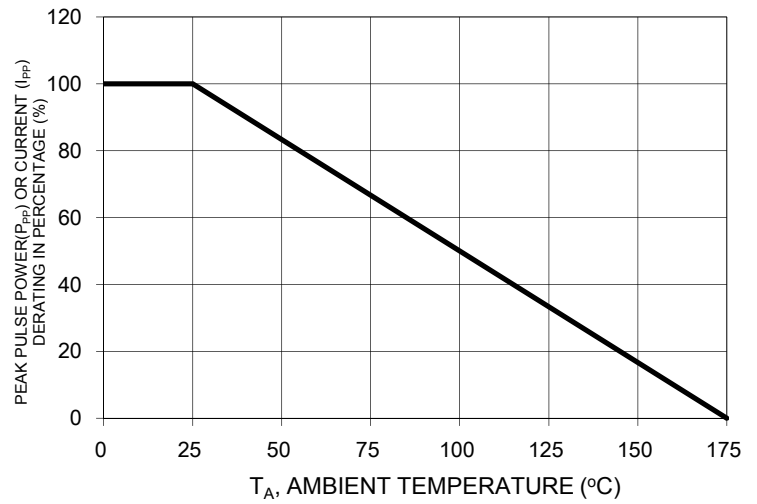


FIG. 3 CLAMPING POWER PULSE WAVEFORM

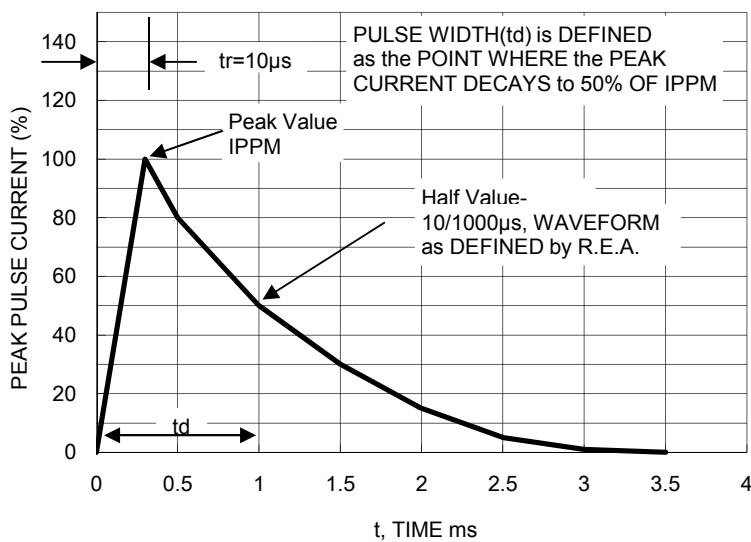


FIG.4 STEADY STATE POWER DERATING CURVE

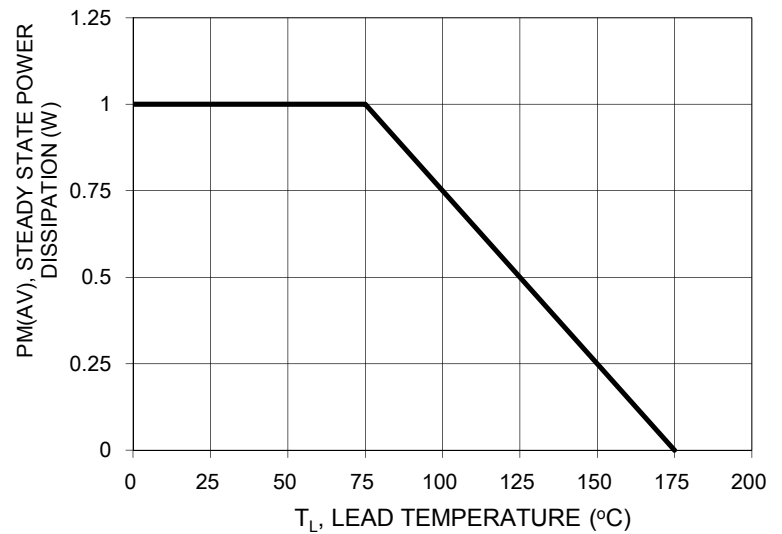


FIG. 5 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT UNIDIRECTIONAL ONLY

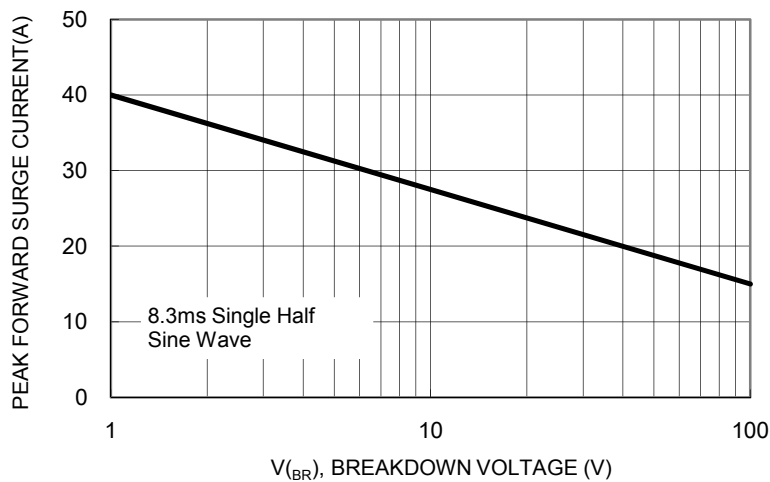


FIG. 6 TYPICAL REVERSE CHARACTERASTICS


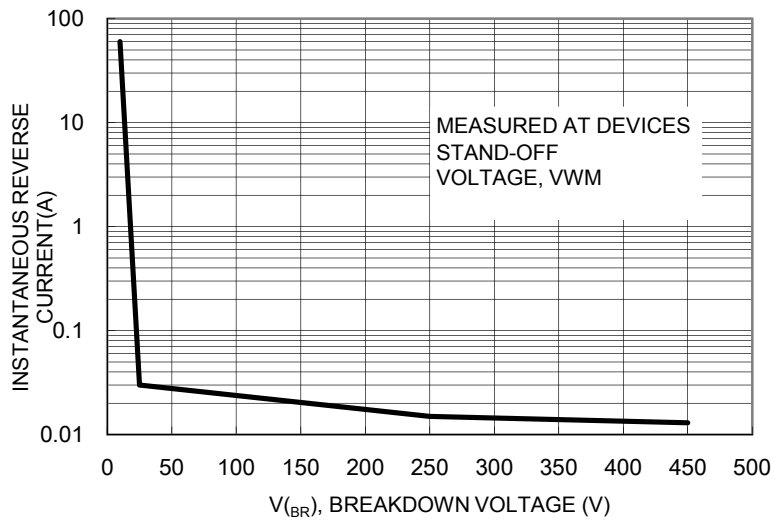


FIG.7 TYPICAL JUNCTION CAPACITANCE UNIDIRECTIONAL

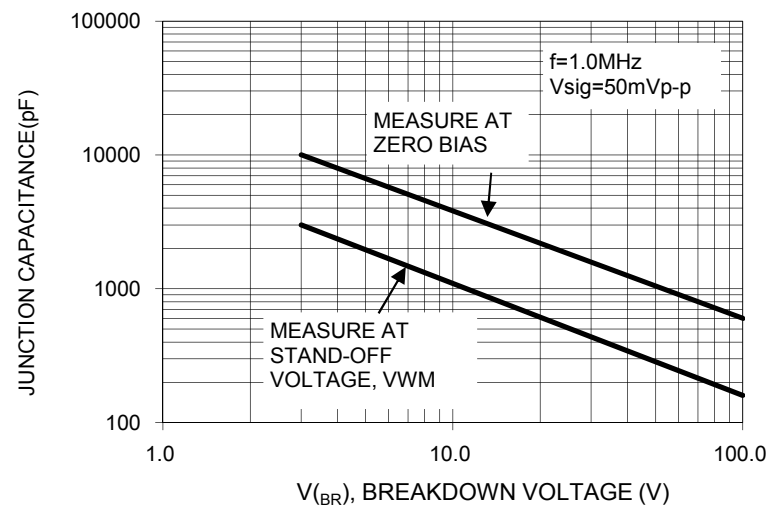


| Device | | Breakdown Voltage @ I _T (Note 1) | | Test Current | Stand-Off Voltage | Reverse Leakage @ V _{WM} | Maximum Peak Pulse Current | Maximum Clamping Voltage @ I _{PPM} | Maximum Temperature Coefficient |
|-----------|------------|---|---------------|--------------|-------------------|-----------------------------------|----------------------------|---|---------------------------------|
| | | V _{BR} | | | | | | | |
| | | Unidirectional | Bidirectional | Min | Max | mA | V | μA | A |
| BZW04-5V8 | BZW04-5V8B | 6.45 | 7.14 | 10 | 5.80 | 1000 | 38.0 | 10.5 | 0.057 |
| BZW04-6V4 | BZW04-6V4B | 7.13 | 7.88 | 10 | 6.40 | 500 | 35.4 | 11.3 | 0.061 |
| BZW04-7V0 | BZW04-7V0B | 7.79 | 8.61 | 10 | 7.02 | 200 | 33.0 | 12.1 | 0.065 |
| BZW04-7V8 | BZW04-7V8B | 8.65 | 9.55 | 1 | 7.78 | 50 | 30.0 | 13.4 | 0.068 |
| BZW04-8V5 | BZW04-8V5B | 9.50 | 10.5 | 1 | 8.55 | 10 | 27.6 | 14.5 | 0.073 |
| BZW04-9V4 | BZW04-9V4B | 10.5 | 11.6 | 1 | 9.40 | 5 | 25.7 | 15.6 | 0.075 |
| BZW04-10 | BZW04-10B | 11.4 | 12.6 | 1 | 10.2 | 5 | 24.0 | 16.7 | 0.078 |
| BZW04-11 | BZW04-11B | 12.4 | 13.7 | 1 | 11.1 | 5 | 22.0 | 18.2 | 0.081 |
| BZW04-13 | BZW04-13B | 14.3 | 15.8 | 1 | 12.8 | 5 | 19.0 | 21.2 | 0.084 |
| BZW04-14 | BZW04-14B | 15.2 | 16.8 | 1 | 13.6 | 1 | 17.8 | 22.5 | 0.083 |
| BZW04-15 | BZW04-15B | 17.1 | 18.9 | 1 | 15.3 | 1 | 16.0 | 25.2 | 0.088 |
| BZW04-17 | BZW04-17B | 19.0 | 21.0 | 1 | 17.1 | 1 | 14.5 | 27.7 | 0.090 |
| BZW04-19 | BZW04-19B | 20.9 | 23.1 | 1 | 18.8 | 1 | 13.0 | 30.6 | 0.092 |
| BZW04-20 | BZW04-20B | 22.8 | 25.2 | 1 | 20.5 | 1 | 12.0 | 33.2 | 0.094 |
| BZW04-23 | BZW04-23B | 25.7 | 28.4 | 1 | 23.1 | 1 | 10.7 | 37.5 | 0.096 |
| BZW04-26 | BZW04-26B | 28.5 | 31.5 | 1 | 25.6 | 1 | 9.6 | 41.5 | 0.097 |
| BZW04-28 | BZW04-28B | 31.4 | 34.7 | 1 | 28.2 | 1 | 8.8 | 45.7 | 0.098 |
| BZW04-31 | BZW04-31B | 34.2 | 37.8 | 1 | 30.8 | 1 | 8.0 | 49.9 | 0.099 |
| BZW04-33 | BZW04-33B | 37.1 | 41.0 | 1 | 33.3 | 1 | 7.4 | 53.9 | 0.100 |
| BZW04-37 | BZW04-37B | 40.9 | 45.2 | 1 | 36.8 | 1 | 6.7 | 59.3 | 0.101 |
| BZW04-40 | BZW04-40B | 44.7 | 49.4 | 1 | 40.2 | 1 | 6.2 | 64.8 | 0.101 |
| BZW04-44 | BZW04-44B | 48.5 | 53.6 | 1 | 43.6 | 1 | 5.7 | 70.1 | 0.102 |
| BZW04-48 | BZW04-48B | 53.2 | 58.8 | 1 | 47.8 | 1 | 5.2 | 77.0 | 0.103 |
| BZW04-53 | BZW04-53B | 58.9 | 65.1 | 1 | 53.0 | 1 | 4.7 | 85.0 | 0.104 |
| BZW04-58 | BZW04-58B | 64.6 | 71.4 | 1 | 58.1 | 1 | 4.3 | 92.0 | 0.104 |
| BZW04-64 | BZW04-64B | 71.3 | 78.8 | 1 | 64.1 | 1 | 3.9 | 103 | 0.105 |
| BZW04-70 | BZW04-70B | 77.9 | 86.1 | 1 | 70.1 | 1 | 3.5 | 113 | 0.105 |
| BZW04-78 | BZW04-78B | 86.5 | 95.5 | 1 | 78.0 | 1 | 3.2 | 125 | 0.105 |
| BZW04-85 | BZW04-85B | 95 | 105 | 1 | 85.5 | 1 | 2.9 | 137 | 0.106 |
| BZW04-94 | BZW04-94B | 105 | 116 | 1 | 94.0 | 1 | 2.6 | 152 | 0.107 |
| BZW04-102 | BZW04-102B | 114 | 126 | 1 | 102 | 1 | 2.4 | 165 | 0.107 |
| BZW04-110 | BZW04-110B | 124 | 137 | 1 | 111 | 1 | 2.2 | 179 | 0.107 |
| BZW04-128 | BZW04-128B | 143 | 158 | 1 | 128 | 1 | 2.0 | 207 | 0.108 |
| BZW04-136 | BZW04-136B | 152 | 168 | 1 | 136 | 1 | 1.8 | 219 | 0.108 |
| BZW04-145 | BZW04-145B | 161 | 179 | 1 | 145 | 1 | 1.7 | 234 | 0.108 |
| BZW04-154 | BZW04-154B | 171 | 189 | 1 | 154 | 1 | 1.6 | 246 | 0.108 |
| BZW04-171 | BZW04-171B | 190 | 210 | 1 | 171 | 1 | 1.5 | 274 | 0.108 |
| BZW04-188 | BZW04-188B | 209 | 231 | 1 | 188 | 1 | 1.4 | 301 | 0.108 |
| BZW04-213 | BZW04-213B | 237 | 263 | 1 | 213 | 1 | 1.2 | 344 | 0.110 |
| BZW04-239 | BZW04-239B | 266 | 294 | 1 | 239 | 1 | 1.1 | 384 | 0.110 |
| BZW04-256 | BZW04-256B | 285 | 315 | 1 | 256 | 1 | 1.0 | 414 | 0.110 |
| BZW04-273 | BZW04-273B | 304 | 336 | 1 | 273 | 1 | 0.9 | 438 | 0.110 |
| BZW04-299 | BZW04-299B | 332 | 368 | 1 | 299 | 1 | 0.8 | 482 | 0.110 |
| BZW04-342 | BZW04-342B | 380 | 420 | 1 | 342 | 1 | 0.75 | 548 | 0.110 |
| BZW04-376 | BZW04-376B | 418 | 462 | 1 | 376 | 1 | 0.67 | 603 | 0.110 |

Notes:

1. Pulse test : tp<50ms
2. All terms and symbols are consistent with ANSI/IEEE C62.35
3. For bipolar types having V_{WM} of 10 volts and less, the I_D limit is doubled.

PACKAGE OUTLINE DIMENSIONS

DO-204AL (DO-41)

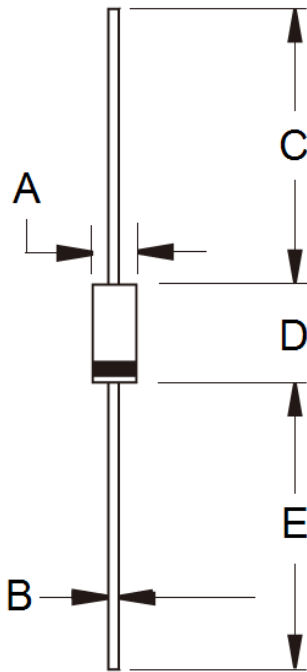

| DIM. | Unit (mm) | | Unit (inch) | |
|------|-----------|------|-------------|-------|
| | Min | Max | Min | Max |
| A | 2.00 | 2.70 | 0.079 | 0.106 |
| B | 0.71 | 0.86 | 0.028 | 0.034 |
| C | 25.40 | - | 1.000 | - |
| D | 4.20 | 5.20 | 0.165 | 0.205 |
| E | 25.40 | - | 1.000 | - |

MARKING DIAGRAM



P/N = Specific Device Code
 G = Green Compound
 YWW = Date Code
 F = Factory Code

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.