


1300mW, 2.7 - 200V Zener Diodes

Features

- Low leakage current
- Available in unidirectional
- Glass passivated junction
- Silicon Planar Power Zener Diodes
- Total power dissipation: Max 1300mW
- Moisture sensitivity: level 1, per J-STD-020
- BZX85-C series zener voltage tolerance is $\pm 5\%$
- BZX85-B series zener voltage tolerance is $\pm 2\%$



DO-41(DO-204AL)

Applications

Protection from high voltage, high energy transients, voltage stabilization.

Absolute Maximum Ratings ($T_A=25^\circ\text{C}$ unless otherwise noted)			
Parameter	Symbol	Ratings	Unit
Zener voltage	V_Z	See Next Table	V
Power dissipation at $T_L=75^\circ\text{C}$	P_{tot}	1300	mW
Continuous forward current	I_F	200	mA
Typical Thermal Resistance , Junction to Ambient	$R_{\theta JA}$	130	$^\circ\text{C/W}$
Maximum junction temperature	T_J	175	$^\circ\text{C}$
Storage temperature range	T_{STG}	-65 to +175	$^\circ\text{C}$

Note:

1. Valid provided that leads at a distance of 9.5mm from case are kept at ambient temperature.

Electrical Characteristics (TA = 25 °C unless otherwise noted)

Part Number	V _Z at I _{ZT} (V)					I _{ZT} (mA)	Maximum Zener Current
	Typ	Y=C		Y=B			I _{ZM} (mA)
		Min	Max	Min	Max		
BZX85-Y2V7	2.7	2.57	2.84	2.65	2.75	60	-
BZX85-Y3V0	3.0	2.85	3.15	2.94	3.06	60	-
BZX85-Y3V3	3.3	3.14	3.47	3.23	3.37	60	-
BZX85-Y3V6	3.6	3.42	3.78	3.53	3.67	60	290
BZX85-Y3V9	3.9	3.71	4.10	3.82	3.98	60	280
BZX85-Y4V3	4.3	4.09	4.52	4.21	4.39	50	250
BZX85-Y4V7	4.7	4.47	4.94	4.61	4.79	45	215
BZX85-Y5V1	5.1	4.85	5.36	5.00	5.20	45	200
BZX85-Y5V6	5.6	5.32	5.88	5.49	5.71	45	190
BZX85-Y6V2	6.2	5.89	6.51	6.08	6.32	35	170
BZX85-Y6V8	6.8	6.46	7.14	6.66	6.94	35	155
BZX85-Y7V5	7.5	7.13	7.88	7.35	7.65	35	140
BZX85-Y8V2	8.2	7.79	8.61	8.04	8.36	25	130
BZX85-Y9V1	9.1	8.65	9.56	8.92	9.28	25	120
BZX85-Y10	10	9.50	10.50	9.80	10.20	25	105
BZX85-Y11	11	10.45	11.55	10.78	11.22	20	97
BZX85-Y12	12	11.40	12.60	11.76	12.24	20	88
BZX85-Y13	13	12.35	13.65	12.74	13.26	20	79
BZX85-Y15	15	14.25	15.75	14.70	15.30	15	71
BZX85-Y16	16	15.20	16.80	15.68	16.32	15	66
BZX85-Y18	18	17.10	18.90	17.64	18.36	15	62
BZX85-Y20	20	19.00	21.00	19.60	20.40	10	56
BZX85-Y22	22	20.90	23.10	21.56	22.44	10	52
BZX85-Y24	24	22.80	25.20	23.52	24.48	10	47
BZX85-Y27	27	25.65	28.35	26.46	27.54	8	41
BZX85-Y30	30	28.50	31.50	29.40	30.60	8	36
BZX85-Y33	33	31.35	34.65	32.34	33.66	8	33
BZX85-Y36	36	34.20	37.80	35.28	36.72	8	30
BZX85-Y39	39	37.05	40.95	38.22	39.78	6	28
BZX85-Y43	43	40.85	45.15	42.14	43.86	6	26
BZX85-Y47	47	44.65	49.35	46.06	47.94	4	23
BZX85-Y51	51	48.45	53.55	49.98	52.02	4	21
BZX85-Y56	56	53.20	58.80	54.88	57.12	4	19
BZX85-Y62	62	58.90	65.10	60.76	63.24	4	16
BZX85-Y68	68	64.60	71.40	66.64	69.36	4	15
BZX85-Y75	75	71.25	78.75	73.50	76.50	4	14

Electrical Characteristics (TA = 25 °C unless otherwise noted)¹

Part Number	V _Z at I _{ZT} (V)					I _{ZT} (mA)	Maximum Zener Current
	Typ	Y=C		Y=B			I _{ZM} (mA)
		Min	Max	Min	Max		
BZX85-Y82	82	77.90	86.10	80.36	83.64	2.7	12
BZX85-Y91	91	86.45	95.55	89.18	92.82	2.7	10
BZX85-Y100	100	95.00	105.0	98.0	102.0	2.7	9.4
BZX85-Y110	110	104.5	115.5	107.8	112.2	2.7	8.6
BZX85-Y120	120	114.0	126.0	117.6	122.4	2.0	7.8
BZX85-Y130	130	123.5	136.5	127.4	132.6	2.0	7.0
BZX85-Y150	150	142.5	157.5	147.0	153.0	2.0	6.4
BZX85-Y160	160	152.0	168.0	156.8	163.2	1.5	5.8
BZX85-Y180	180	171.0	189.0	176.4	183.6	1.5	5.2
BZX85-Y200	200	190.0	210.0	196.0	204.0	1.5	4.7

Electrical Characteristics (TA = 25 °C unless otherwise noted)

Part Number	Maximum dynamic resistance				Maximum reverse leakage current	
	Z _{ZT} @I _{ZT} (Ω)	I _{ZT} (mA)	Z _{ZK} @I _{ZK} (Ω)	I _{ZK} (mA)	I _R @ V _R (uA)	V _R (V)
BZX85-Y2V7	20	60	400	1	-	1
BZX85-Y3V0	20	60	400	1	-	1
BZX85-Y3V3	20	60	400	1	-	1
BZX85-Y3V6	15	60	500	1	20	1
BZX85-Y3V9	15	60	500	1	10	1
BZX85-Y4V3	13	50	500	1	3	1
BZX85-Y4V7	13	45	600	1	3	1
BZX85-Y5V1	10	45	500	1	1	1.5
BZX85-Y5V6	7	45	400	1	1	2
BZX85-Y6V2	4	35	300	1	1	3
BZX85-Y6V8	3.5	35	300	1	1	4
BZX85-Y7V5	3	35	200	0.5	1	4.5
BZX85-Y8V2	5	25	200	0.5	1	6.2
BZX85-Y9V1	5	25	200	0.5	1	6.8
BZX85-Y10	7	25	200	0.5	0.5	7.5
BZX85-Y11	8	20	300	0.5	0.5	8.2
BZX85-Y12	9	20	350	0.5	0.5	9.1

Electrical Characteristics (TA = 25 °C unless otherwise noted)¹



Part Number	Dynamic resistance				Reverse leakage current	
	Z _{zT} @I _{zT} (Ω)	I _{zT} (mA)	Z _{zK} @I _{zK} (Ω)	I _{zK} (mA)	I _R @ V _R (uA)	V _R (V)
BZX85-Y13	10	20	400	0.5	0.5	10
BZX85-Y15	10	15	500	0.5	0.5	11
BZX85-Y16	15	15	500	0.5	0.5	12
BZX85-Y18	20	15	500	0.5	0.5	13
BZX85-Y20	24	10	600	0.5	0.5	15
BZX85-Y22	25	10	600	0.5	0.5	16
BZX85-Y24	25	10	600	0.5	0.5	18
BZX85-Y27	30	8	750	0.25	0.5	20
BZX85-Y30	30	8	1000	0.25	0.5	22
BZX85-Y33	35	8	1000	0.25	0.5	24
BZX85-Y36	40	8	1000	0.25	0.5	27
BZX85-Y39	50	6	1000	0.25	0.5	30
BZX85-Y43	50	6	1000	0.25	0.5	33
BZX85-Y47	90	4	1500	0.25	0.5	36
BZX85-Y51	115	4	1500	0.25	0.5	39
BZX85-Y56	120	4	2000	0.25	0.5	43
BZX85-Y62	125	4	2000	0.25	0.5	47
BZX85-Y68	130	4	2000	0.25	0.5	51
BZX85-Y75	135	4	2000	0.25	0.5	56
BZX85-Y82	200	4	3000	0.25	0.5	62
BZX85-Y91	250	2.7	3000	0.25	0.5	68
BZX85-Y100	350	2.7	3000	0.25	0.5	75
BZX85-Y110	450	2.7	4000	0.25	0.5	82
BZX85-Y120	550	2.0	4500	0.25	0.5	91
BZX85-Y130	700	2.0	5000	0.25	0.5	100
BZX85-Y150	1000	2.0	6000	0.25	0.5	110
BZX85-Y160	1100	1.5	6500	0.25	0.5	120
BZX85-Y180	1200	1.5	7000	0.25	0.5	130
BZX85-Y200	1500	1.5	8000	0.25	0.5	150

Note:


1. BZX85-C series zener voltage tolerance is $\pm 5\%$
2. BZX85-B series zener voltage tolerance is $\pm 2\%$

Ratings and Characteristics Curves

($T_A = 25^\circ\text{C}$ unless otherwise noted)

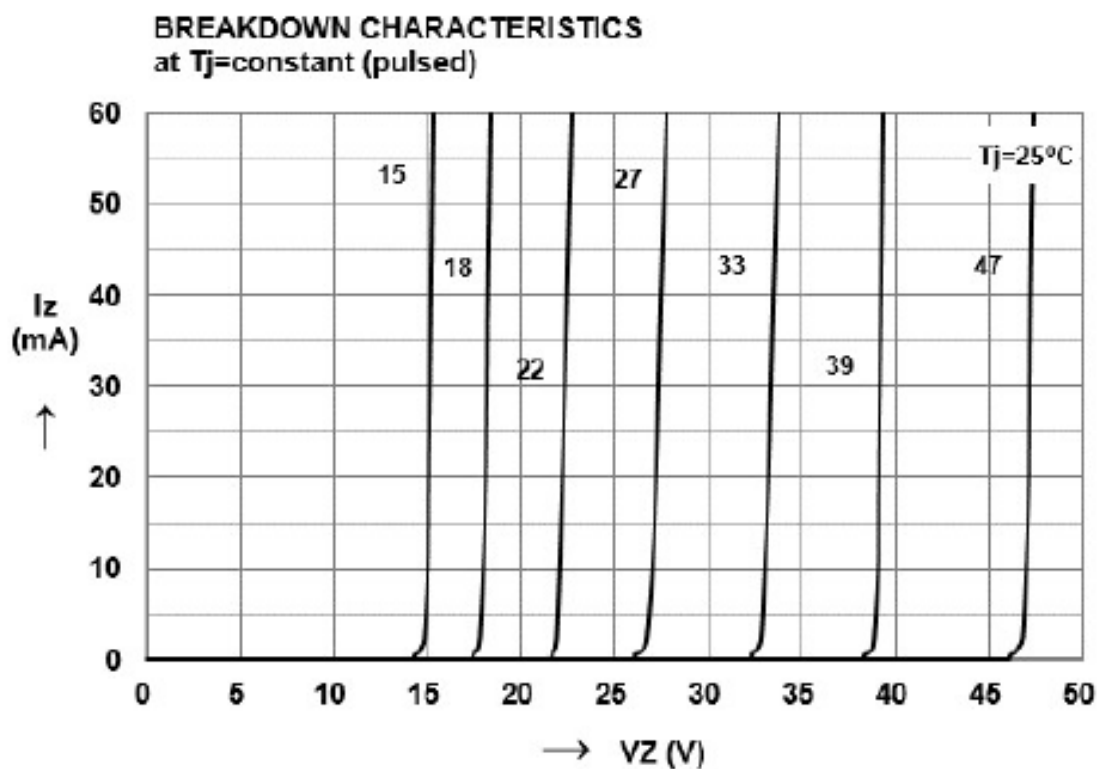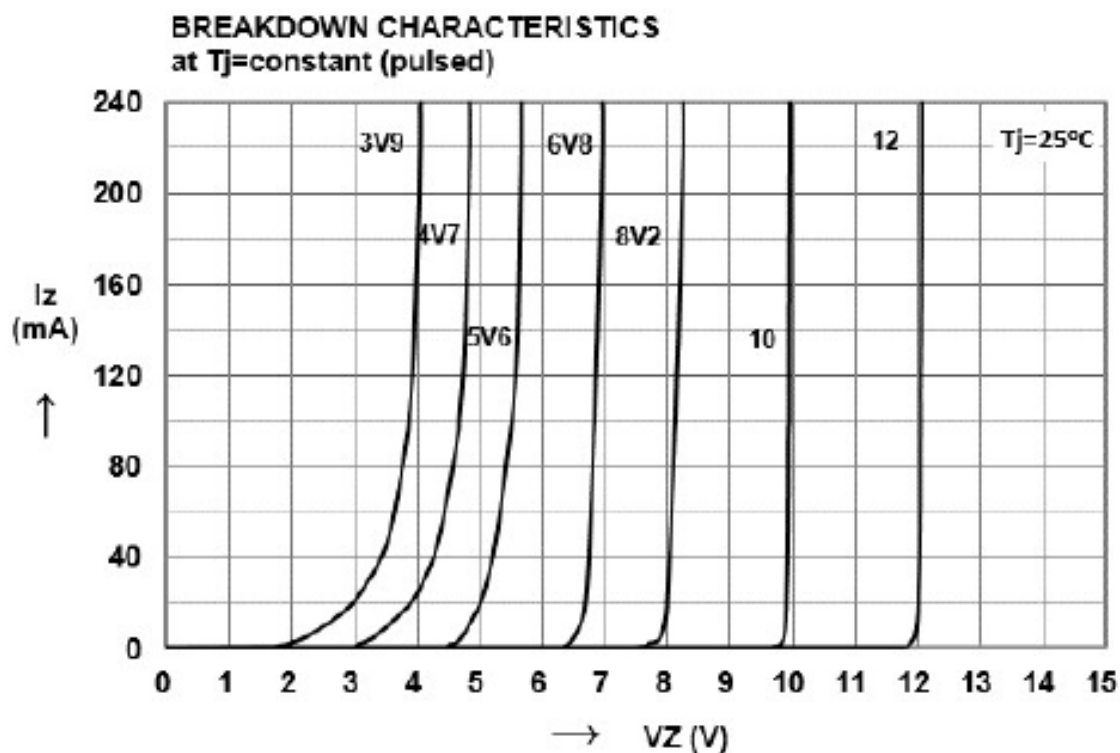


BREAKDOWN CHARACTERISTICS at $T_j = \text{constant}$ (pulsed)

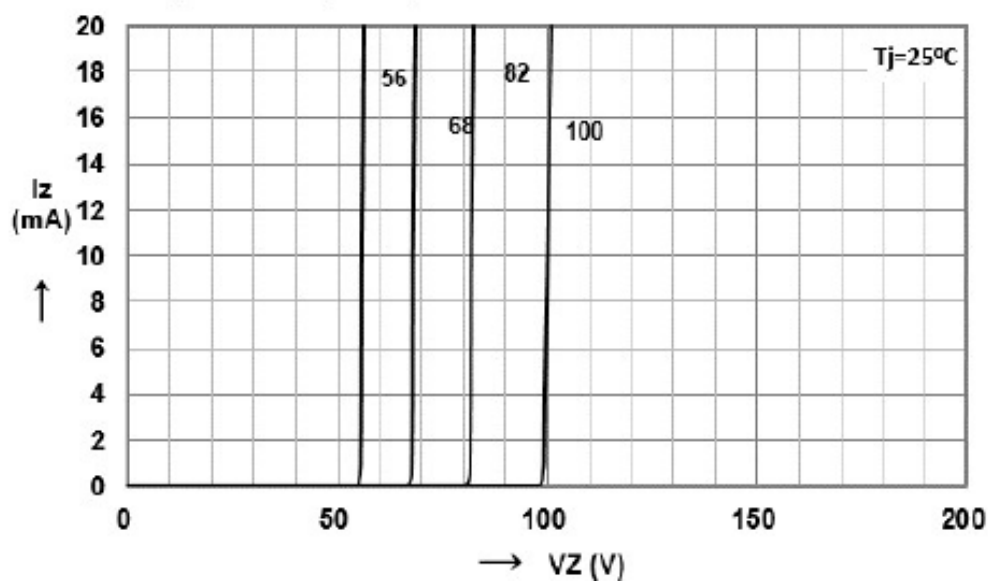


Admissible power dissipation versus ambient temperature




Valid provided that leads are kept at ambient temperature at a distance of 10 mm from case

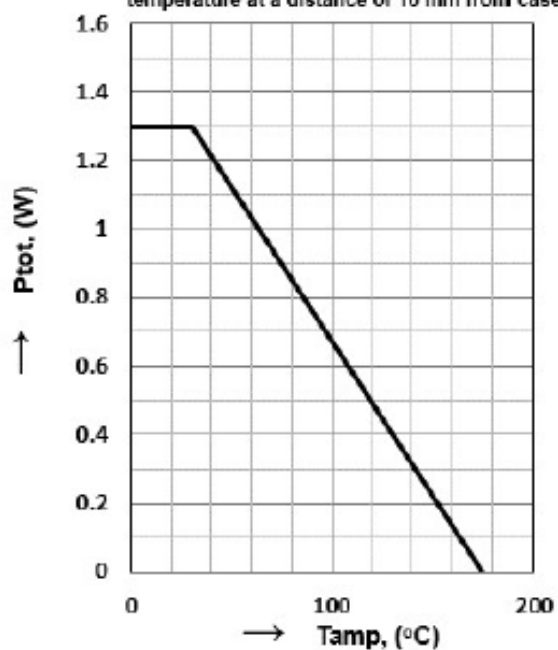

Pulse thermal resistance versus pulse duration

Valid provided that leads are kept at ambient temperature at a distance of 8 mm from case

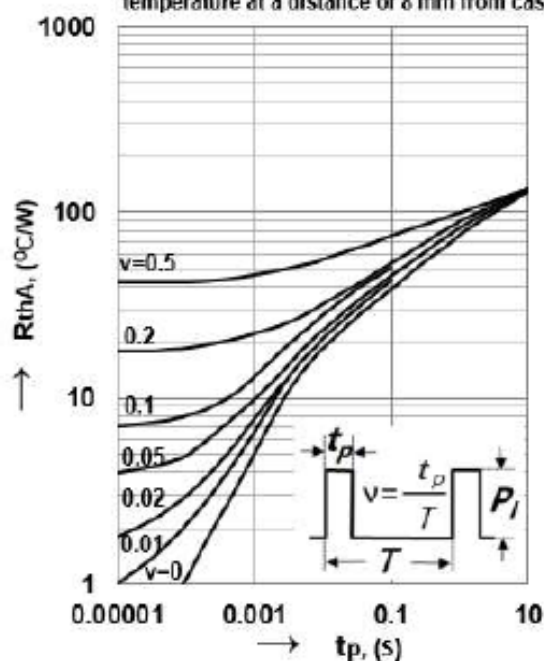

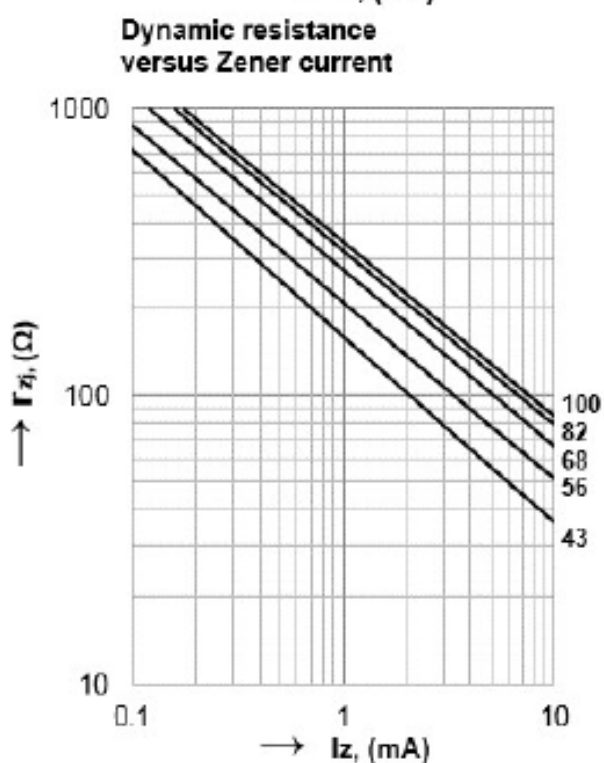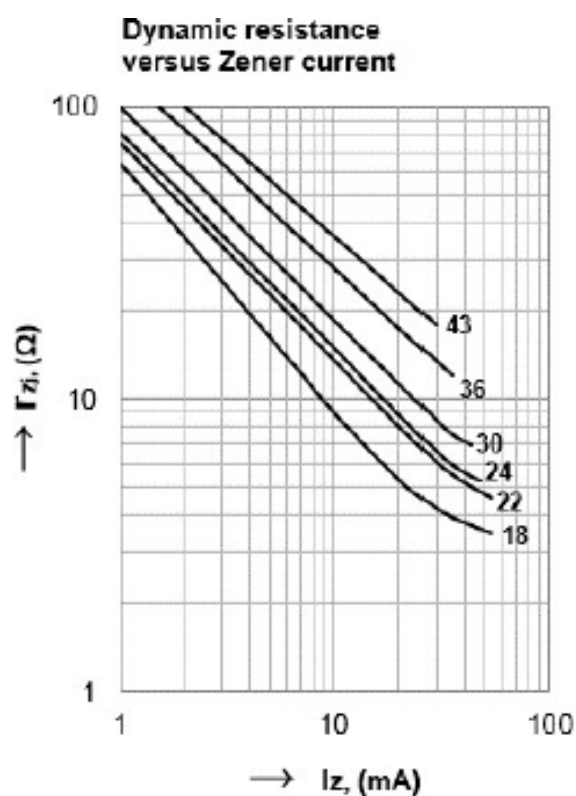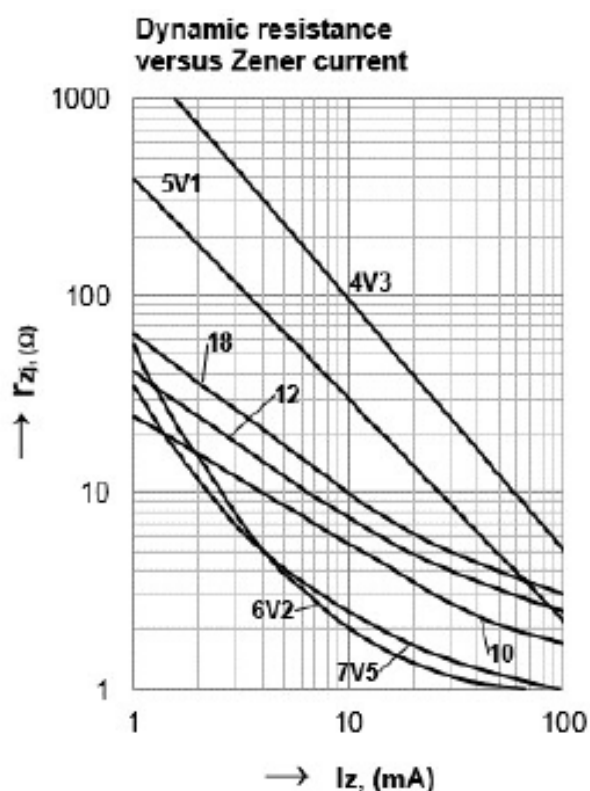


Package Outline Dimensions

in inches (millimeters)

DO-41 (DO-204AL)

CASE DIMENSION (DO-41 Type, 52mm), Unit: mm

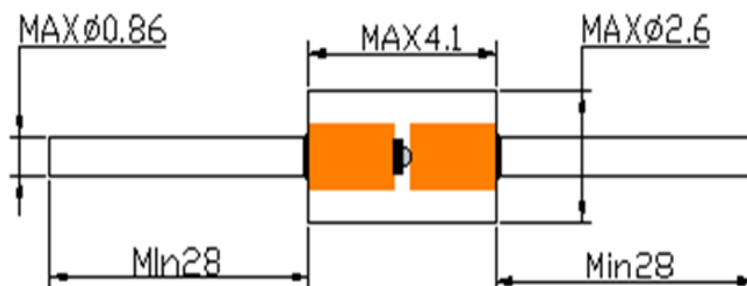

Revision History

Document Version	Date of release	Description of changes
Rev.A	2021.06.15	Released Datasheet
Rev.B	2023.10.31	Modify document format

Disclaimers

These materials are intended as a reference to assist our customers in the selection of the Suzhou Good-Ark product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Suzhou Good-Ark Electronics Co., Ltd. or a third party.

Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.

All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Suzhou Good-Ark Electronics Co., Ltd. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized Suzhou Good-Ark Electronics Co., Ltd. for the latest product information before purchasing a product listed herein. The information described here may contain technical inaccuracies or typographical errors. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors. Please also pay attention to information published by Suzhou Good-Ark Electronics Co., Ltd. by various means, including our website home page.

(<http://www.goodark.com>)

When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, Please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.

The prior written approval of Suzhou Good-Ark Electronics Co., Ltd. is necessary to reprint or reproduce in whole or in part these materials.

Please contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized distributor for further details on these materials or the products contained herein.