



Specifications

- Current rating: 10A AC,DC
- Voltage rating: 300V AC,DC
- Temperature range: -25°C ~ +85°C
- Contact resistance: 7mΩ Max.
- Insulation resistance: 1000MΩ Min.
- Withstanding voltage: 1500V AC/minute

Assembly layout & Panel hole layout



PART NO.	Dimension A
C1301-2P	10.85
C1301-3P	10.85
C1301-4P	10.85
C1301-2x2P	15.35
C1301-2x3P	15.35
C1301-3x3P	19.85
C1301-3x4P	19.85
C1301-3x5P	19.85

Unit:mm

PART NO.	Dimensions			
	A	B	C	D
C1301HM-2P	15.00	6.00	6.85	5.20
C1301HM-3P	19.70	6.00	6.85	5.20
C1301HM-4P	24.20	6.00	6.85	5.20
C1301HM-2x2P	15.60	10.60	11.60	5.20
C1301HM-2x3P	19.70	10.60	11.60	5.20
C1301HM-3x3P	19.70	14.80	15.70	5.20
C1301HM-3x4P	24.20	14.80	15.70	5.20
C1301HM-3x5P	28.70	14.80	15.70	5.20

Unit:mm

C1301H — 4.50mm pitch Housing

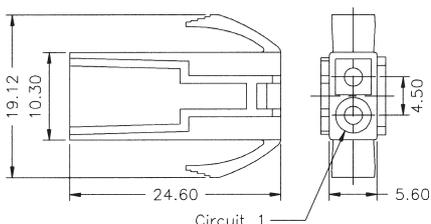
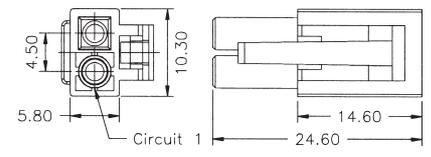
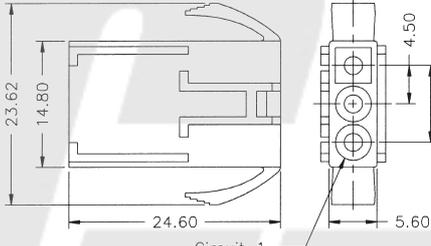
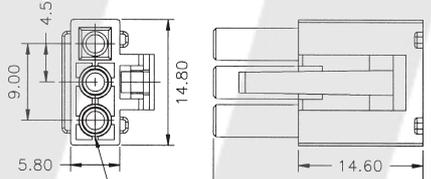
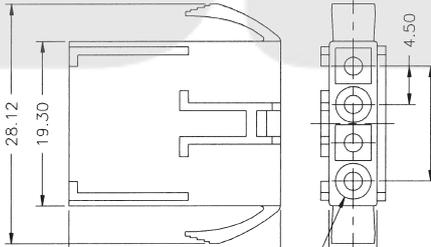
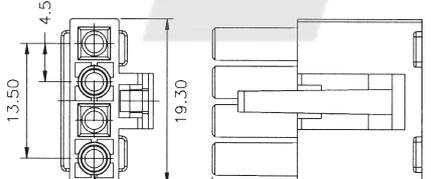
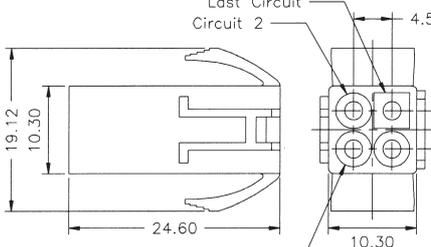
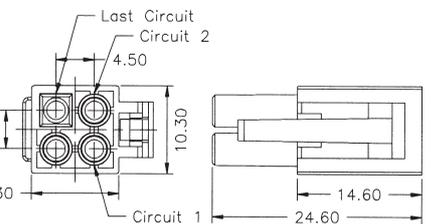
Reference Informations:

*Material: Nylon 66,UL94V-0

*Tolerance:(unit:mm) .0 ±0.25/ .00 ±0.15/ .000 ±0.10

Ordering Information & Dimensions:

Unit:mm

C1301HM(A)	C1301HF
 <p data-bbox="215 795 542 846">C1301HM-2P C1301HMA-2P(WITHOUT EARS)</p>	 <p data-bbox="826 824 949 853">C1301HF-2P</p>
 <p data-bbox="215 1176 542 1227">C1301HM-3P C1301HMA-3P(WITHOUT EARS)</p>	 <p data-bbox="826 1205 949 1234">C1301HF-3P</p>
 <p data-bbox="215 1579 343 1608">C1301HM-4P</p>	 <p data-bbox="826 1579 949 1608">C1301HF-4P</p>
 <p data-bbox="215 1948 367 1977">C1301HM-2X2P</p>	 <p data-bbox="826 1948 973 1977">C1301HF-2X2P</p>

C1301H

4.50mm pitch Housing

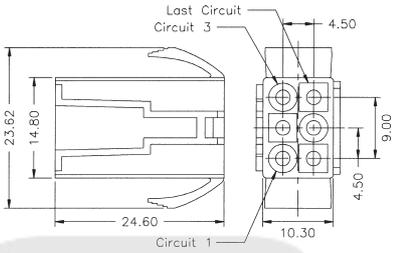
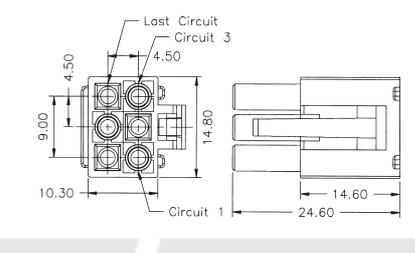
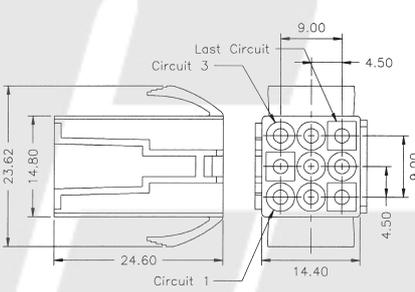
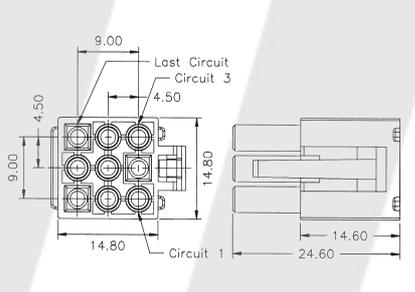
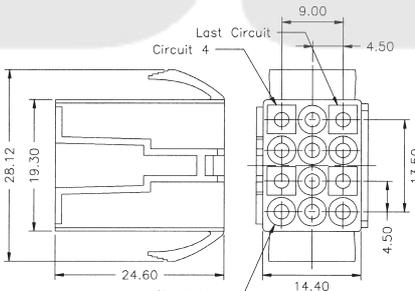
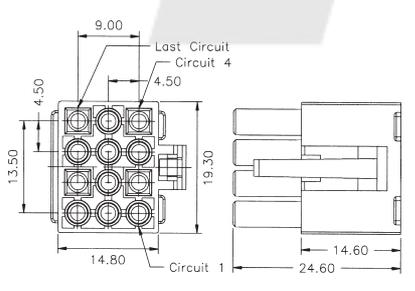
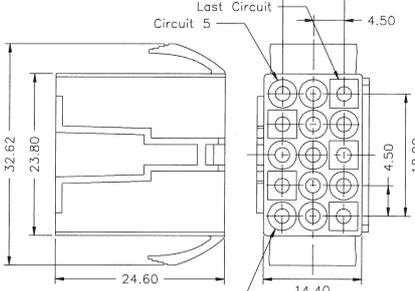
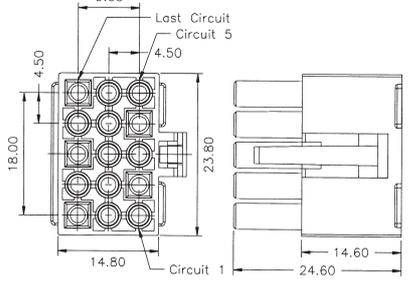
Reference Informations:

*Material: Nylon 66,UL94V-0

*Tolerance:(unit:mm) .0 ±0.25/ .00 ±0.15/ .000 ±0.10

Ordering Information & Dimensions:

Unit:mm

C1301HM	C1301HF
 <p data-bbox="220 824 379 853">C1301HM-2X3P</p>	 <p data-bbox="831 824 991 853">C1301HF-2X3P</p>
 <p data-bbox="220 1205 379 1234">C1301HM-3X3P</p>	 <p data-bbox="831 1205 991 1234">C1301HF-3X3P</p>
 <p data-bbox="220 1585 379 1615">C1301HM-3X4P</p>	 <p data-bbox="831 1585 991 1615">C1301HF-3X4P</p>
 <p data-bbox="220 1966 379 1995">C1301HM-3X5P</p>	 <p data-bbox="831 1966 991 1995">C1301HF-3X5P</p>

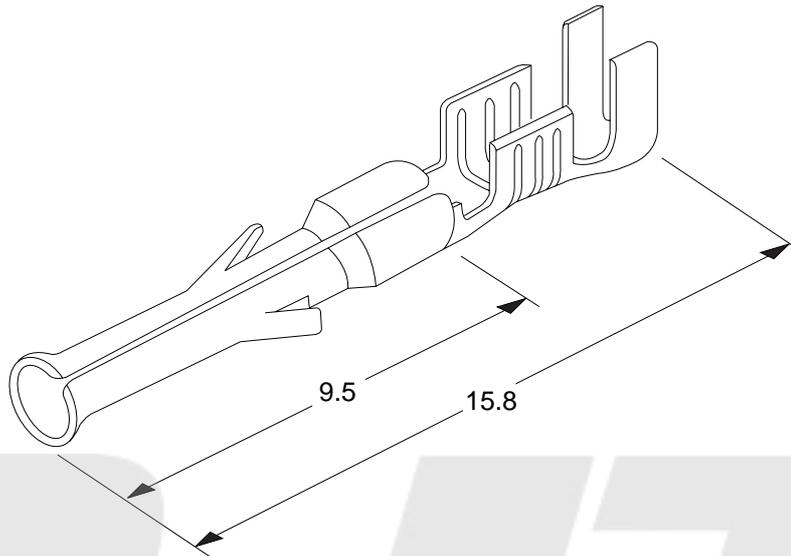
C1301AF-T

4.50mm pitch Crimp Terminal

Reference Informations:

*Used in CJT C1301AHF series Housing

*Tolerance:(unit:mm) .0 ±0.25/ .00 ±0.15/ .000 ±0.10



Ordering Information & Specifications:

Unit:mm

Part No.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
C1301AF-TP	AWG#16-#20	3.40mm(max)	Brass	Tin-plated	8,000pcs

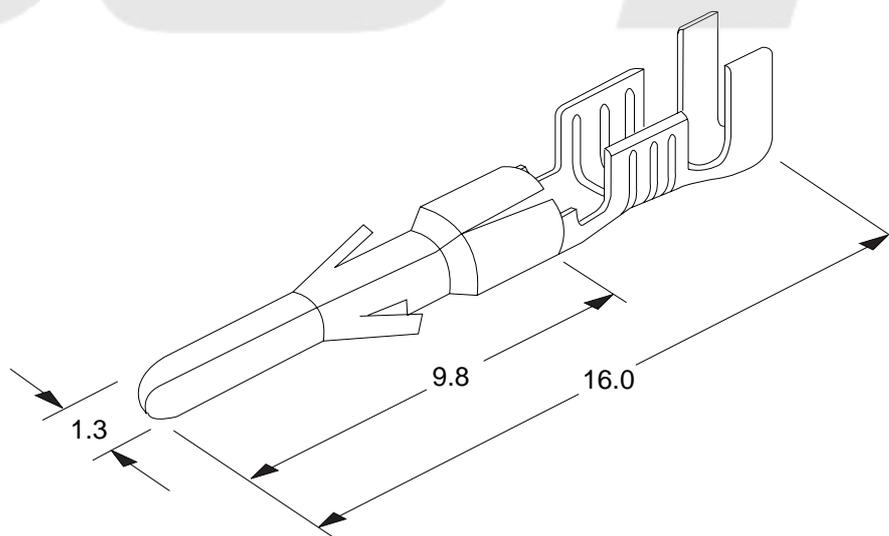
C1301AM-T

4.50mm pitch Crimp Terminal

Reference Informations:

*Used in CJT C1301AHM series Housing

*Tolerance:(unit:mm) .0 ±0.25/ .00 ±0.15/ .000 ±0.10



Ordering Information & Specifications:

Unit:mm

Part No.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
C1301AM-TP	AWG#16-#20	3.40mm(max)	Brass	Tin-plated	8,000pcs

C1301AH — 4.50mm pitch Housing



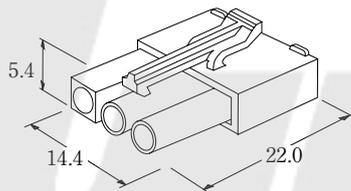

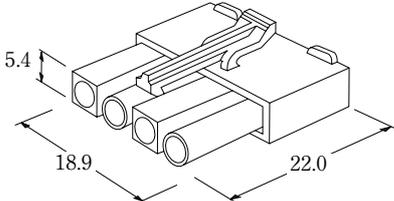
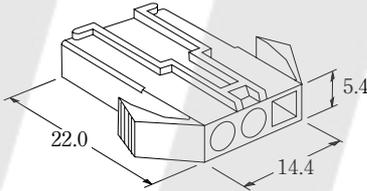
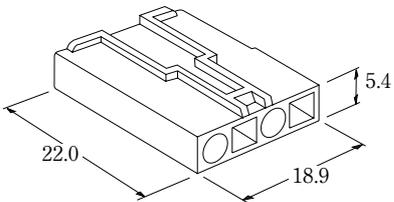
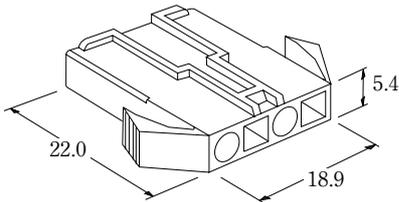
Reference Informations:

*Material: Nylon 66,UL94V-0

*Tolerance:(unit:mm) .0 ±0.25/ .00 ±0.15/ .000 ±0.10

Ordering Information & Dimensions:

Unit:mm

C1301AHF	C1301AHM(A)
 <p>C1301AHF-2P</p>	 <p>C1301AHMA-2P(WITHOUT EARS)</p>
 <p>C1301AHF-3P</p>	 <p>C1301AHM-2P</p>
 <p>C1301AHF-4P</p>	 <p>C1301AHM-3P</p>
	 <p>C1301AHMA-3P(WITHOUT EARS)</p>
	 <p>C1301AHM-4P</p>

C1301AH — 4.50mm pitch Housing

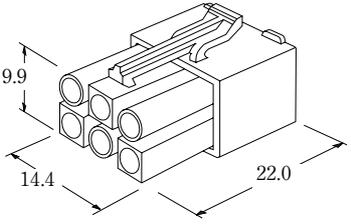
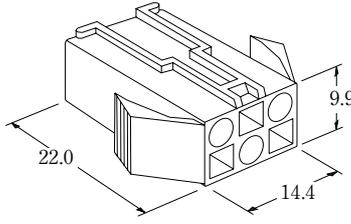
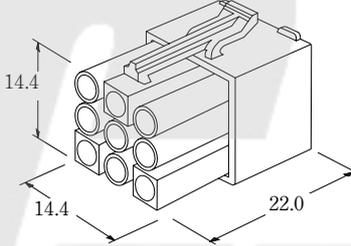
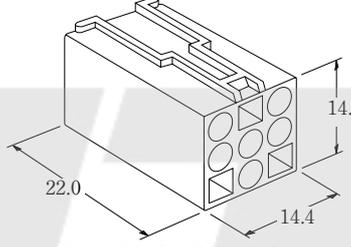
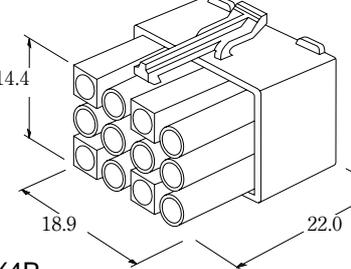
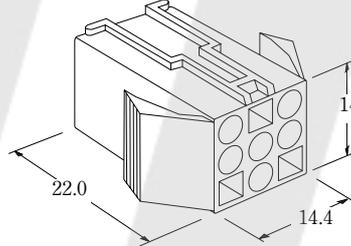
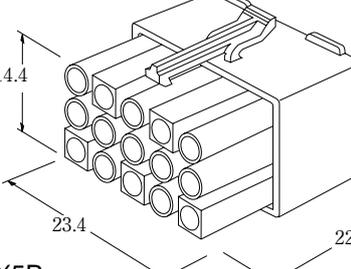
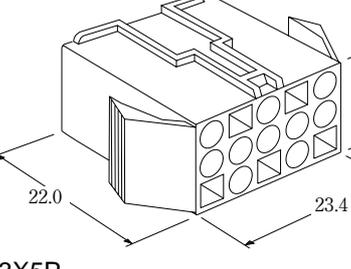
Reference Informations:

*Material: Nylon 66,UL94V-0

*Tolerance:(unit:mm) .0 ±0.25/ .00 ±0.15/ .000 ±0.10

Ordering Information & Dimensions:

Unit:mm

C1301AHF	C1301AHM(A)
 <p>C1301AHF-2X3P</p>	 <p>C1301AHM-2X3P</p>
 <p>C1301AHF-3X3P</p>	 <p>C1301AHMA-3X3P(WITHOUT EARS)</p>
 <p>C1301AHF-3X4P</p>	 <p>C1301AHM-3X3P</p>
 <p>C1301AHF-3X5P</p>	 <p>C1301AHM-3X5P</p>