

CCM02 MK I is a connector with landing contacts.

Features

- Available with 8 through hole contacts.
- 100,000 card insertion cycles.
- The contacts do not touch the card until it is almost fully inserted - a minimal wiping action removes any non-conductive material.
- The connector has been designed to give a positive feel as the card is fully inserted.
- For added reliability, the integrated card end-travel switch (which is normally open) is sealed against dust and grit.


Construction		
Contacts	Copper alloy	
Plating	Contact area : Gold over Nickel Terminals : Tin lead (2 μ min)	
Moldings	Thermoplastic UL 94V-0 rated	
Mechanical Data		
Number of Contacts	8	
Mechanical life	100,000 cycles min	
Card insertion force	10 N max	
Card extraction force	1 N min / 10 N max	
Contact force	0.15 N min / 0.35 N max	
Vibration	Frequency 10 to 500 Hz. Acceleration 50m/s ² Duration 6 hours - amplitude 0,35 mm Max electrical discontinuity 1 μ s	
Shock	Peak value 500 m/s ² - Duration 11 ms 3 shocks in each direction of each axis Max electrical discontinuity 1 μ s	
Contact Electrical Data		
Insulation resistance	1,000 M Ω min	
Resistance	100 m Ω max	
Current rating	10 μ A min / 1 A max	
Dielectric strength	750 Vrms min	
Switch Electrical Data		
Card detection switch	Normally open	
Contact resistance	100 m Ω max	
Dielectric strength	250 Vrms min	
Current rating	1 mA min / 10 mA max	
Maximum power	0.2 VA	
Environmental Data		
Operating temperature	-40°C to +85°C	
Soldering temperature	Wave: 260°C / 5 sec	
Damp heat	IEC 512 test number 11c (10 days)	
Salt mist	IEC 512 test number 11f (96 hours)	
Card detection switch	Sealed IP 54	
Ordering Code		
Part Number	Number of Contacts	Packaging Multiple
CCM02-1N0-3	8	300
CCM02-1N0-32	8	300
CCM02-1N0-35	8 with extended cover	200
Packaging		

30 per tray, 10 trays per box.

Exception: CCM02-1N0-35, 20 per tray, 10 per box.

CCM02 MK I

Dimensional Drawings

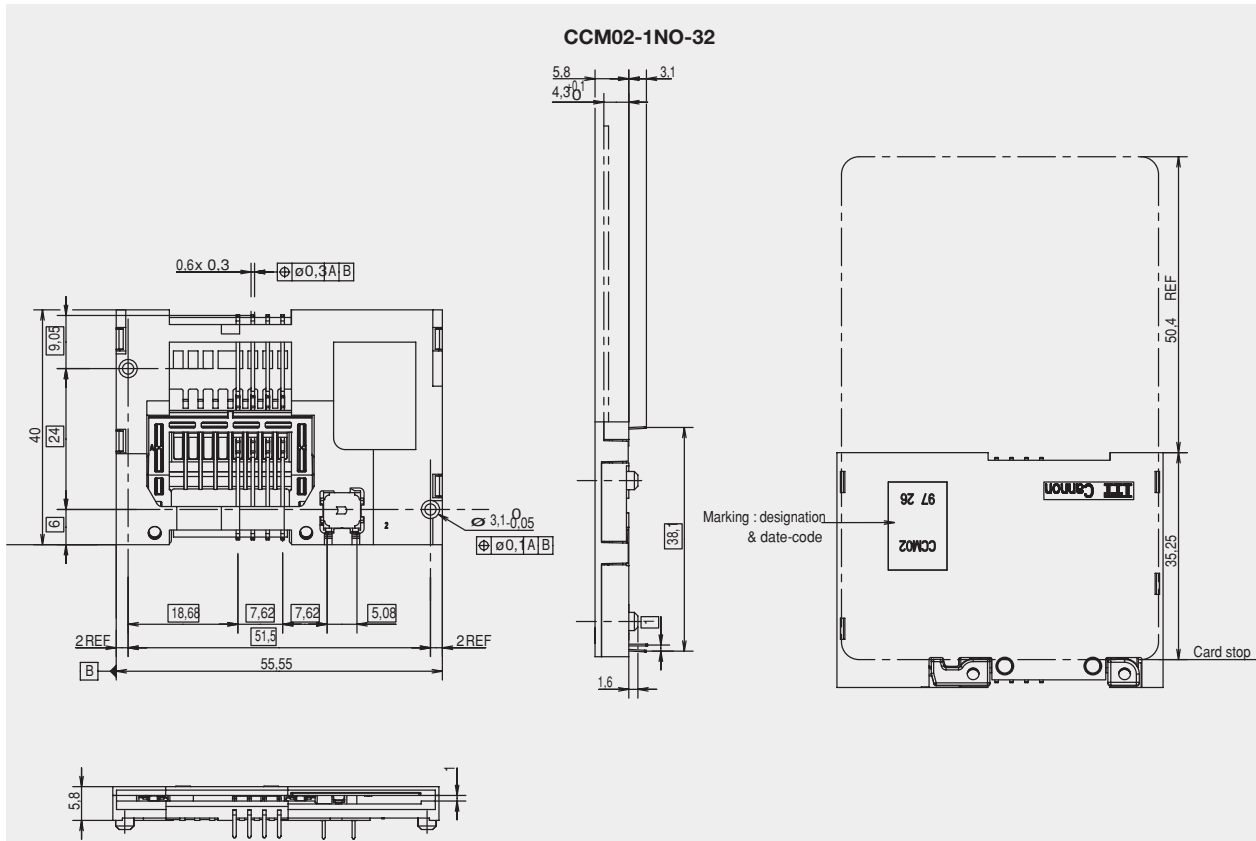

PCB Layout

