


Features

- All Junctions Completely Protected with Silicon Dioxide
- 0.5 W Capability with Proper Heat Sinking
- 50 μ A Low Operating Current
- Electrically Equivalent to 1N4678 - 1N4717

Die

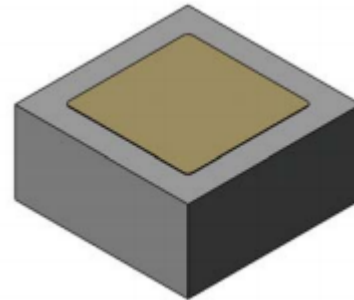

Description

These 0.5 W zener diodes are electrically equivalent to the 1N4678 - 1N4717 series diodes. They are compatible with all wire bonding and die attach techniques with the exception of solder reflow.

These diodes are available in JANHC and JANKC per MIL-PRF-19500/127.

Electrical Specifications: Zener Test Current = 50 μ A, $T_A = +25^\circ\text{C}$

Part # ¹	Zener Voltage ³ V_Z	Voltage Regulation ² $3V_Z$	Reverse Voltage $I_R @ V_R$		DC Zener Current
	Nominal	Maximum	Maximum		Maximum
	V	Ω	μ A	V	mA
CD4678	1.8	0.70	7.5	10.	120.0
CD4679	2.0	0.70	5.0	1.0	110.0
CD4680	2.2	0.75	4.0	1.0	100.0
CD4681	2.4	0.80	2.0	1.0	90.0
CD4682	2.7	0.80	1.0	1.0	90.0
CD4683	3.0	0.90	0.8	1.0	85.0
CD4684	3.3	0.95	7.5	1.5	80.0
CD4685	3.6	0.95	7.5	2.0	75.0
CD4686	3.9	0.97	5.0	2.0	70.0
CD4687	4.3	0.99	4.0	2.0	65.0
CD4688	4.7	0.99	10.0	3.0	60.0
CD4689	5.1	0.97	10.0	3.0	55.0
CD4690	5.6	0.96	10.0	4.0	50.0
CD4691	6.2	0.95	10.0	5.0	45.0
CD4692	6.8	0.90	10.0	5.1	35.0
CD4693	7.5	0.75	10.0	5.7	31.8
CD4694	8.2	0.50	1.0	6.2	29.0
CD4695	8.7	0.10	1.0	6.6	27.4
CD4696	9.1	0.08	1.0	6.9	26.2
CD4697	10.0	0.10	1.0	7.8	24.8

(Continued next page)

¹ * Restrictions on Hazardous Substances, European Union Directive 2011/65/EU.

CD4678 thru CD4717



Zener Diode Chip Series

Rev. V1

Electrical Specifications: Zener Test Current = 50 μ A, $T_A = +25^\circ\text{C}$

Part # ¹	Zener Voltage ³ V_Z	Voltage Regulation ² $3V_Z$	Reverse Voltage $I_R @ V_R$		DC Zener Current
	Nominal	Maximum	Maximum		Maximum
	V	Ω	μ A	V	mA
CD4698	11.0	0.11	0.05	8.4	21.6
CD4699	12.0	0.12	0.05	9.1	20.4
CD4700	13	0.13	0.05	9.8	19.0
CD4701	14	0.14	0.05	10.6	17.5
CD4702	15	0.15	0.05	11.4	16.3
CD4703	16	0.16	0.05	12.1	15.4
CD4704	17	0.17	0.05	12.9	14.5
CD4705	18	0.18	0.05	13.6	13.2
CD4706	19	0.19	0.05	14.4	12.5
CD4707	20	0.20	0.01	15.2	11.9
CD4708	22	0.22	0.01	16.7	10.8
CD4709	24	0.24	0.01	18.2	9.9
CD4710	25	0.25	0.01	19.0	9.5
CD4711	27	0.27	0.01	20.4	8.8
CD4712	28	0.28	0.01	21.2	8.5
CD4713	30	0.30	0.01	22.8	7.9
CD4714	33	0.33	0.01	25.0	7.2
CD4715	36	0.36	0.01	27.3	6.6
CD4716	39	0.39	0.01	29.8	6.1
CD4717	43	0.43	0.01	32.6	5.5


1. The JEDEC type numbers shown above have a standard tolerance of $\pm 5\%$ of the nominal Zener voltage. V_Z is measured with the diode in thermal equilibrium at $25^\circ\text{C} \pm 3^\circ\text{C}$.
2. $V_Z @ 100 \mu\text{A}$ minus $V_Z @ 10 \mu\text{A}$.
3. Zener voltage is read using a pulse measurement, 10 milliseconds maximum.

Absolute Maximum Ratings^{4,5}


Parameter	Absolute Maximum
Forward Voltage	1.5 V @ 200 mA
Operating Temperature	-65°C to +175°C
Storage Temperature	-65°C to +175°C

- Exceeding any one or combination of these limits may cause permanent damage to this device.
- MACOM does not recommend sustained operation near these survivability limits.

Zener Impedance vs. Operating Current

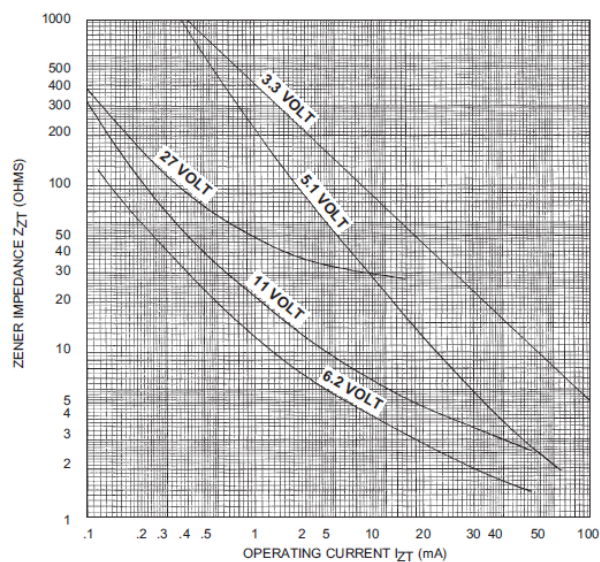

Die

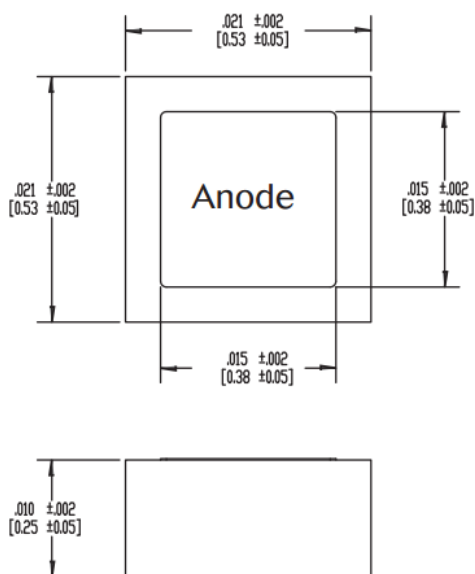

Metallization: Top: (anode) AL
Back: (cathode) Au

AL Thickness: 25,000 Å Minimum

Gold Thickness: 4,000 Å Minimum

Chip Thickness: 10 mils

Circuit Layout Data: For Zener operation, cathode must be operated positive with respect to anode.

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.