

CD5283 thru CD5314 & CD7048 thru CD7055




Current Regulator Diode Chips

Rev. V1

Features

- All Junctions Completely Protected with Silicon Dioxide
- Constant Current over Wide Voltage Range
- Electrically Equivalent to 1N5283 - 1N5314 & 1N7048 - 1N7055

Die



Description

These 0.5 W zener diodes are electrically equivalent to the 1N5283 - 1N5314, 1N7048 - 1N7055 series diodes. They are compatible with all wire bonding and die attach techniques with the exception of solder reflow.

These diodes are available in JANHC and JANKC per MIL-PRF-19500/463.

Electrical Specifications: $T_A = +25^\circ\text{C}$ (unless otherwise specified)

Part #	Regulator Current $V_S = 25\text{ V } I_P$ (mA)			Dynamic Impedance $@ V_S = 25\text{ V } Z_S$ (M) (Note 1)	Knee Impedance $@ V_K = 6.0\text{ V } Z_K$ (M) (Note 2)	Limiting Voltage $@ I_L = 0.8 I_P$ (min) V_L (V)	Peak Operating Voltage (V)
	Nominal	Minimum	Maximum	Minimum	Minimum	Maximum	
CD5283	0.22	0.198	0.242	25.0	2.75	1.00	100
CD5284	0.24	0.216	0.264	19.0	2.35	1.00	100
CD5285	0.27	0.243	0.297	14.0	1.95	1.00	100
CD5286	0.30	0.270	0.330	9.0	1.60	1.00	100
CD5287	0.33	0.297	0.363	8.0	1.35	1.00	100
CD5288	0.39	0.351	0.429	4.10	1.000	1.05	100
CD5289	0.43	0.387	0.473	3.30	0.870	1.05	100
CD5290	0.47	0.423	0.517	2.70	0.750	1.05	100
CD5291	0.56	0.504	0.616	1.90	0.560	1.10	100
CD5292	0.62	0.558	0.682	1.55	0.470	1.13	100
CD5293	0.68	0.612	0.748	1.35	0.400	1.15	100
CD5294	0.75	0.675	0.825	1.15	0.335	1.20	100
CD5295	0.82	0.738	0.902	1.00	0.290	1.25	100
CD5296	0.91	0.819	1.001	0.88	0.240	1.29	100
CD5297	1.00	0.900	1.100	0.80	0.205	1.35	100
CD5298	1.10	0.99	1.21	0.70	0.180	1.40	100
CD5299	1.20	1.08	1.32	0.64	0.155	1.45	100

(Continued next page)

1 * Restrictions on Hazardous Substances, European Union Directive 2011/65/EU.

CD5283 thru CD5314 & CD7048 thru CD7055



Current Regulator Diode Chips




Rev. V1

Electrical Specifications: $T_A = +25^\circ\text{C}$ (unless otherwise specified)

Part #	Regulator Current $V_S = 25\text{ V } I_P$ (mA)			Dynamic Impedance @ $V_S = 25\text{ V } Z_S$ (M) (Note 1)	Knee Impedance @ $V_K = 6.0\text{ V } Z_K$ (M) (Note 2)	Limiting Voltage $@ I_L = 0.8 I_P$ (min) V_L (V)	Peak Operating Voltage (V)
	Nominal	Minimum	Maximum	Minimum	Minimum	Maximum	
CD5300	1.30	1.17	1.43	0.58	0.135	1.50	100
CD5301	1.40	1.26	1.54	0.54	0.115	1.55	100
CD5302	1.50	1.35	1.65	0.51	0.105	1.60	100
CD5303	1.60	1.44	1.76	0.475	0.092	1.65	100
CD5304	1.80	1.62	1.98	0.420	0.074	1.75	100
CD5305	2.00	1.80	2.20	0.395	0.061	1.85	100
CD5306	2.20	1.98	2.42	0.370	0.052	1.95	100
CD5307	2.40	2.16	2.54	0.345	0.044	2.00	100
CD5308	2.70	2.43	2.97	0.320	0.035	2.15	100
CD5309	3.00	2.70	3.30	0.300	0.029	2.25	100
CD5310	3.30	2.97	3.63	0.280	0.024	2.35	100
CD5311	3.60	3.24	3.96	0.265	0.020	2.50	100
CD5312	3.90	3.51	4.29	0.255	0.017	2.60	100
CD5313	4.30	3.87	4.73	0.245	0.014	2.75	100
CD5314	4.70	4.23	5.17	0.235	0.012	2.90	100
CD7048	5.10	4.59	5.61	100	4.0	3.67	80
CD7049	5.60	5.04	6.16	90	4.0	4.03	80
CD7050	6.20	5.58	6.82	80	3.0	4.46	70
CD7051	6.80	6.12	7.48	70	2.0	4.90	70
CD7052	7.50	6.75	8.25	50	15	5.40	60
CD7053	8.20	7.38	9.02	30	1.5	5.90	60
CD7054	9.10	8.19	10.01	20	1.0	6.55	50
CD7055	10.00	9.00	11.10	10	1.0	7.20	50

1. Z_S is derived by superimposing A 90 Hz RMS signal equal to 10% of V_T on V_T .
2. Z_K is derived by superimposing A 90Hz RMS signal equal to 10% of V_K on V_K .

Temperature Coefficient

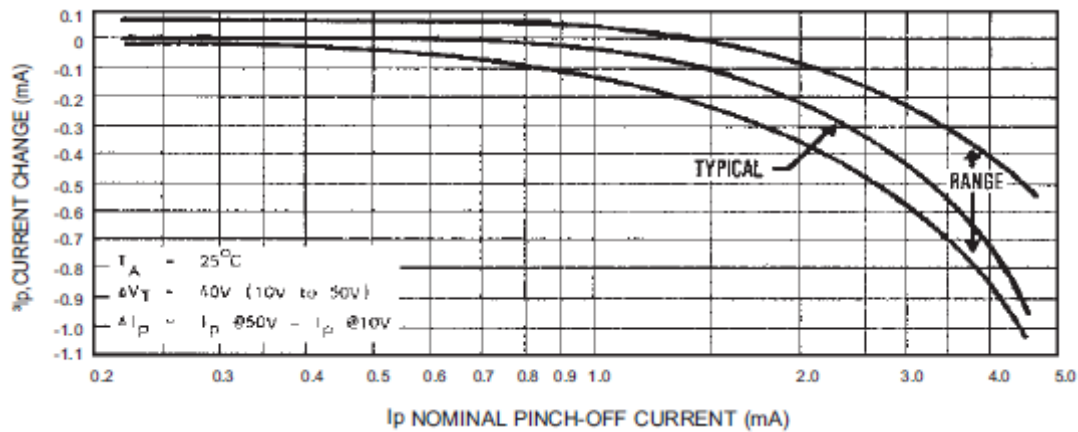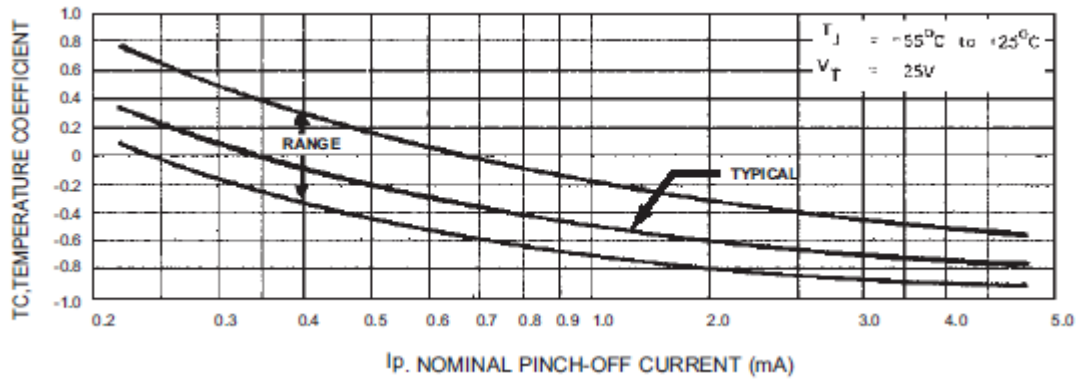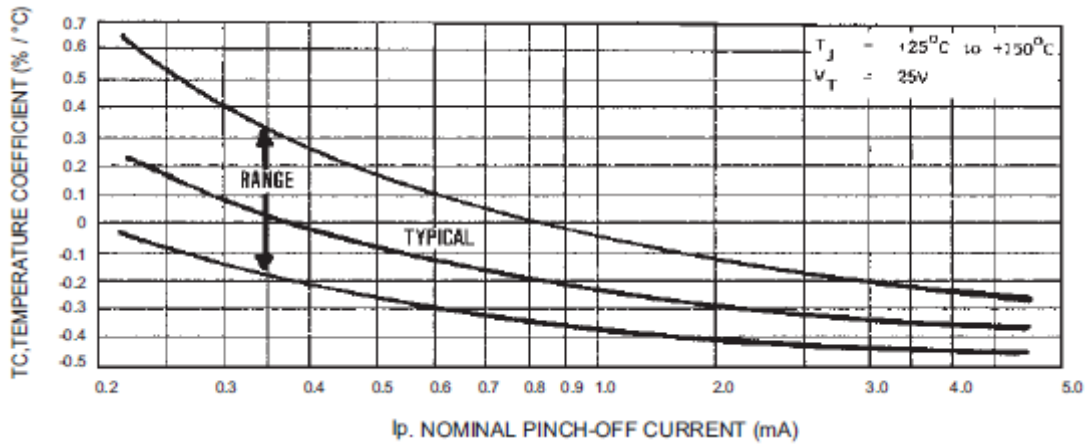

CD5283 thru CD5314 & CD7048 thru CD7055



Current Regulator Diode Chips


Rev. V1

Absolute Maximum Ratings^{3,4}

Parameter	Absolute Maximum
Operating Temperature	-65°C to +175°C
Storage Temperature	-65°C to +175°C

- Exceeding any one or combination of these limits may cause permanent damage to this device.
- MACOM does not recommend sustained operation near these survivability limits.

Die

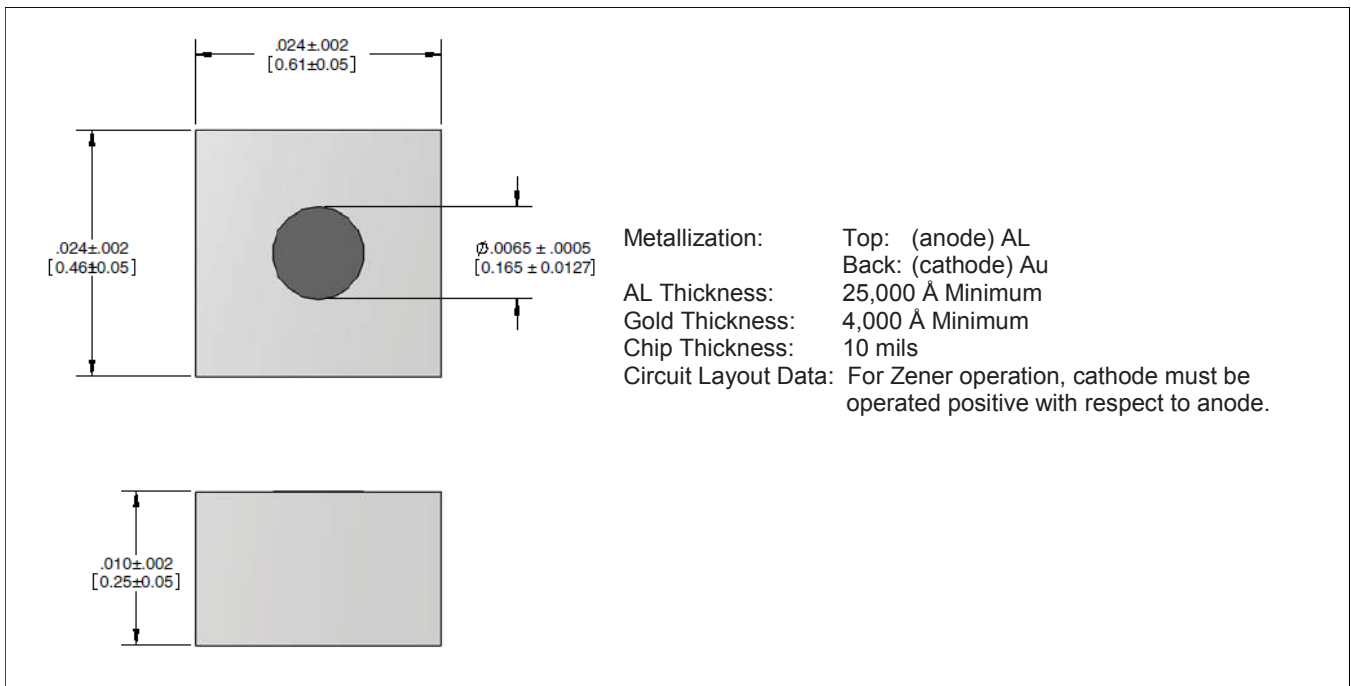

CD5283 thru CD5314 & CD7048 thru CD7055



Current Regulator Diode Chips

Rev. V1

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.