

# Zener Diode Chip Series

## CD5518B thru CD5546B




Available in JANHC and JANKC per MIL-PRF-19500/437



### Features

- All Junctions completely protected with silicon dioxide
- 0.5 Watt capability with proper heat sinking
- Electrically equivalent to 1N5518B thru 1N5546B
- Compatible with all wire bonding and die attach techniques with the exception of solder reflow



### Maximum Ratings

Operating Temperature: -65°C to +175°C

Storage Temperature: -65°C to +175°C

Forward Voltage @ 200mA: 1.5 volts maximum

### Electrical Specifications @ +25 °C (Unless Otherwise Specified)

TYPE NUMBER	NOMINAL ZENER VOLTAGE $V_Z @ I_{ZT}$ (NOTE 1)	ZENER TEST CURRENT $I_{ZT}$	MAXIMUM ZENER IMPEDANCE $Z_{ZT} @ I_{ZT}$ (NOTE 2)	MAXIMUM REVERSE LEAKAGE CURRENT		REGULATION FACTOR $\Delta V_Z$ (NOTE 3)	LOW VZ CURRENT $I_{ZL}$
				$I_R$	$V_R$		
	VOLTS	mAdc	OHMS	mAdc	VOLTS	VOLTS	mAdc
CD5518B	3.3	20	26	5.0	1.0	0.90	2.0
CD5519B	3.6	20	24	3.0	1.0	0.90	2.0
CD5520B	3.9	20	22	1.0	1.0	0.90	2.0
CD5521B	4.3	20	18	3.0	1.5	0.75	2.0
CD5522B	4.7	10	22	2.0	2.0	0.60	1.0
CD5523B	5.1	5.0	26	2.0	2.5	0.65]	0.25
CD5524B	5.6	3.0	30	2.0	3.5	0.30	0.25
CD5525B	6.2	1.0	30	1.0	5.0	0.20	0.01
CD5526B	6.8	1.0	30	1.0	6.2	0.10	0.01
CD5527B	7.5	1.0	35	0.5	6.8	0.05	0.01
CD5528B	8.2	1.0	40	0.5	7.5	0.05	0.01
CD5529B	9.1	1.0	45	0.1	8.2	0.05	0.01
CD5530B	10.0	1.0	60	0.05	9.1	0.10	0.01
CD5531B	11.0	1.0	80	0.05	9.9	0.20	0.01
CD5532B	12.0	1.0	90	0.05	10.8	0.20	0.01
CD5533B	13.0	.0	90	0.01	11.7	0.20	0.01
CD5534B	14.0	1.0	100	0.01	12.6	0.20	0.01
CD5535B	15.0	1.0	100	0.01	13.5	0.20	0.01
CD5536B	16.0	1.0	100	0.01	14.4	0.20	0.01
CD5537B	17.0	1.0	100	0.01	15.3	0.20	0.01
CD5538B	18.0	1.0	100	0.01	16.2	0.20	0.01
CD5539B	19.0	1.0	100	0.01	17.1	0.20	0.01
CD5540B	20.0	1.0	100	0.01	18.0	0.20	0.01
CD5541B	22.0	1.0	100	0.01	19.8	0.25	0.01
CD5542B	24.0	1.0	100	0.01	21.6	0.30	0.01
CD5543B	25.0	1.0	100	0.01	22.4	0.35	0.01
CD5544B	28.0	1.0	100	0.01	25.2	0.40	0.01
CD5545B	30.0	1.0	100	0.01	27.0	0.45	0.01
CD5546B	33.0	1.0	100	0.01	29.7	0.50	0.01


NOTE 1 Suffix "B" voltage range equals nominal Zener voltage.  $\pm 5\%$ . Suffix "A" equals  $\pm 10\%$ . "C" suffix= $\pm 2\%$  and "D" suffix= $\pm 1\%$ . No Suffix equals  $\pm 20\%$ . Zener voltage is read using a pulse measurement, 10 milliseconds maximum.

NOTE 2 Zener impedance is derived by superimposing on  $I_{ZT}$  a 60Hz rms ac current equal to 10 % of  $I_{ZT}$ .

NOTE 3  $\Delta V_Z$  is the maximum difference between  $V_Z @ I_{ZT}$  and  $V_Z @ I_{ZL}$  measured with the device junction in thermal equilibrium at an ambient temperature of  $+25^\circ \pm 3^\circ\text{C}$ .



**Outline Drawing**

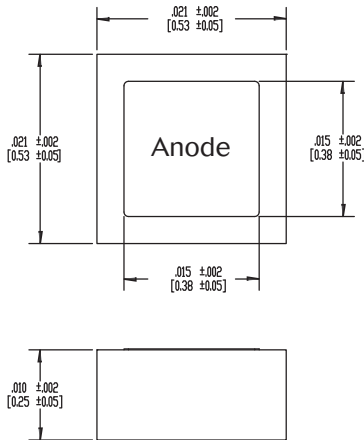

**DESIGN DATA**

**METALLIZATION:** Top: (Anode) Al  
Back: (Cathode) Au


**AL THICKNESS:** 25,000 Å Minimum

**GOLD THICKNESS:** 4,000 Å Minimum

**CHIP THICKNESS:** 10 Mils

**CIRCUIT LAYOUT DATA:** For Zener operation, cathode must be operated positive with respect to anode.

**Graphs**

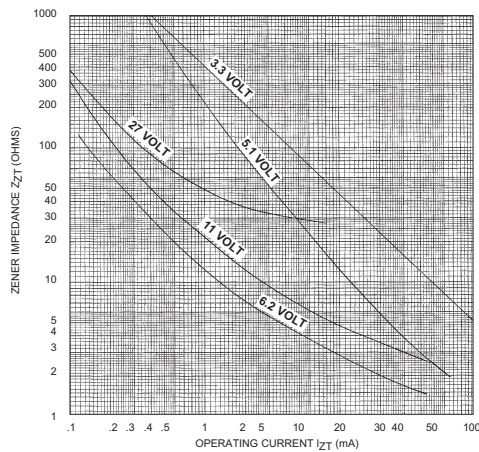

ZENER IMPEDANCE VS. OPERATING CURRENT

**Aeroflex / Metelics, Inc.**

975 Stewart Drive,  
Sunnyvale, CA 94085  
Tel: (408) 737-8181  
Fax: (408) 733-7645

Sales: 888-641-SEMI (7364)

**Hi-Rel Components**

9 Hampshire Street,  
Lawrence, MA 01840  
Tel: (603) 641-3800  
Fax: (978) 683-3264

[www.aeroflex.com/metelics-hirelcomponents](http://www.aeroflex.com/metelics-hirelcomponents)

54 Grenier Field Road,  
Londonderry, NH 03053  
Tel: (603) 641-3800  
Fax: (603)-641-3500

[www.aeroflex.com/metelics](http://www.aeroflex.com/metelics)      [metelics-sales@eroflex.com](mailto:metelics-sales@eroflex.com)

Aeroflex / Metelics, Inc. reserves the right to make changes to any products and services herein at any time without notice. Consult Aeroflex or an authorized sales representative to verify that the information in this data sheet is current before using this product. Aeroflex does not assume any responsibility or liability arising out of the application or use of any product or service described herein, except as expressly agreed to in writing by Aeroflex; nor does the purchase, lease, or use of a product or service from Aeroflex convey a license under any patent rights, copyrights, trademark rights, or any other of the intellectual rights of Aeroflex or of third parties.

Copyright 2011 Aeroflex / Metelics. All rights reserved.

**ISO 9001: 2008 certified companies**



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused.