


SMD Schottky Barrier Rectifiers



CDBB120-G Thru CDBB1100-G

Reverse Voltage: 20 - 100 Volts
 Forward Current: 1.0 Amp
 RoHS Device




Features

- Ideal for surface mount applications
- Easy pick and place
- Plastic package has Underwriters Lab. flammability classification 94V-0
- Built-in strain relief
- Low forward voltage drop

Mechanical Data

- Case: JEDEC DO-214AA molded plastic
- Terminals: solderable per MIL-STD-750, method 2026
- Polarity: Color band denotes cathode end
- Approx. Weight: 0.093 gram

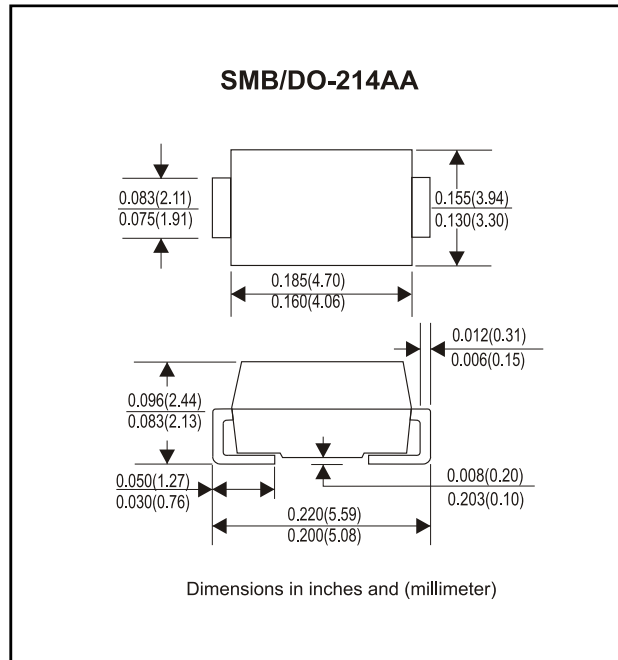

Maximum Ratings and Electrical Characteristics

Parameter	Symbol	CDBB120-G	CDBB140-G	CDBB160-G	CDBB180-G	CDBB1100-G	Unit	
Max. Repetitive Peak Reverse Voltage	V _{RRM}	20	40	60	80	100	V	
Max. DC Blocking Voltage	V _{DC}	20	40	60	80	100	V	
Max. RMS Voltage	V _{RMS}	14	28	42	56	70	V	
Peak Surge Forward Current 8.3ms single half sine-wave superimposed on rate load (JEDEC method)	I _{FSM}	30						A
Max. Average Forward Current	I _O	1.0						A
Max. Instantaneous Forward Current at 1.0 A	V _F	0.50		0.70		0.85	V	
Max. DC Reverse Current at Rated DC Blocking Voltage Ta=25°C	I _R	0.5					mA	
Ta=100°C		10						
Max. Thermal Resistance (Note 1)	R _{θJA} R _{θJL}	75 17					°C/W	
Max. Operating Junction Temperature	T _j	125					°C	
Storage Temperature	T _{STG}	-65 to +150					°C	

Note 1: Thermal resistance from junction to ambient and junction to to lead P.C.B. Mounted on 0.2 x 0.2 inch² copper pad areas

Rating and Characteristic Curves (CDBB120-G Thru CDBB1100-G)

Fig. 1 - Reverse Characteristics

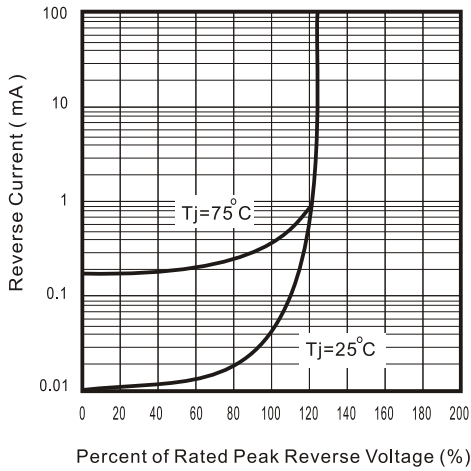


Fig.2 - Forward Characteristics

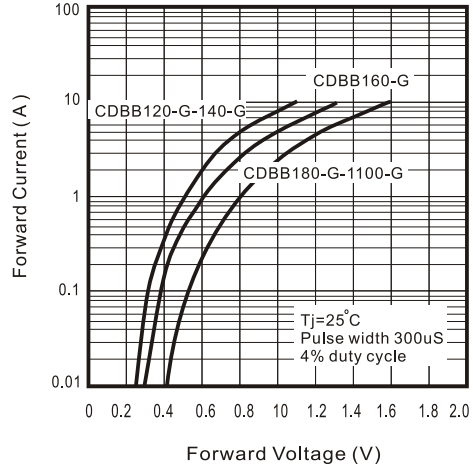


Fig. 3 - Junction Capacitance

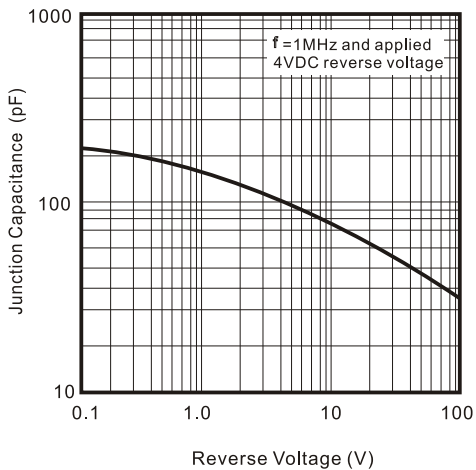


Fig. 4 - Current Derating Curve

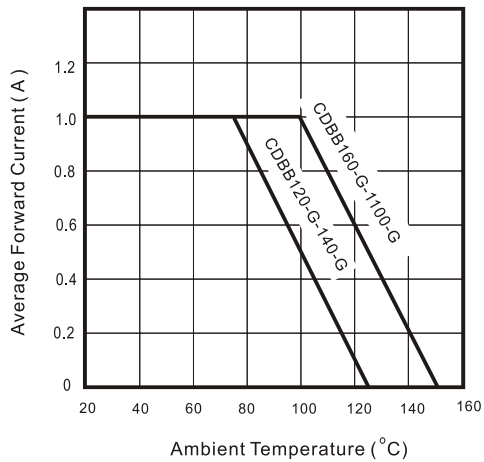


Fig. 5 - Non repetitive forward surge current

