


# Power Inductor CDMPIH Series



## ■ Features

- ◎ Magnetically shielded construction.
- ◎ Storage temperature range:  $-40^{\circ}\text{C}\sim+105^{\circ}\text{C}$ .
- ◎ Operating temperature range:  $-40^{\circ}\text{C}\sim+125^{\circ}\text{C}$  (including coil's self-heat).
- ◎ RoHS Compliance.

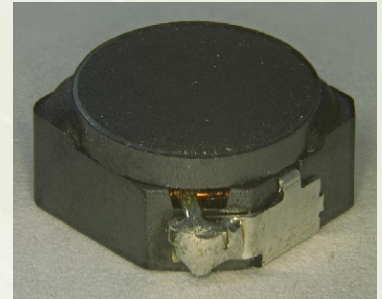


## ■ Applications


Ideally used in Car navigation、 automobile's MPV equipment and D-Amp. ,etc.

## ■ Shapes and Dimensions/Recommended Land Patterns(mm)

### ◆ Dimensions

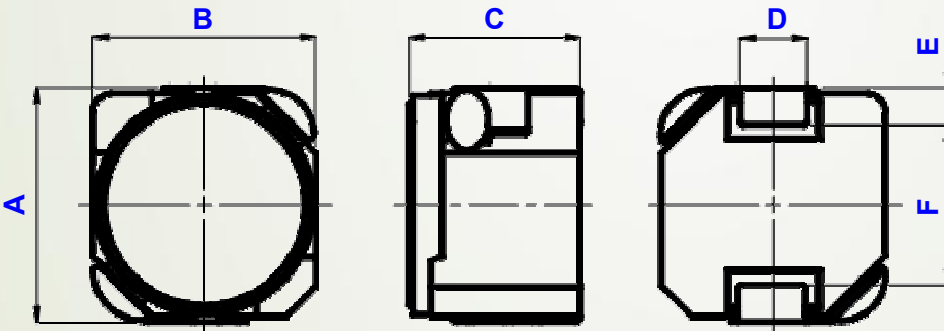

### ◆ Land pattern

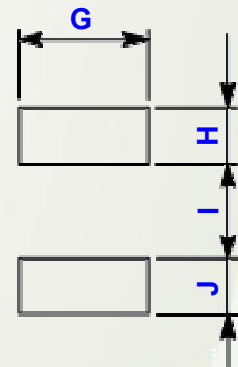

Type name	A Max.	B Max.	C Max.	D	E	F	G	H	I	J
CDMPIH60D48/T125	6.6	6.2	5.0	1.8	1.0	4.3	2.2	1.8	3.6	1.8
CDMPIH75D43/T125	8.1	7.7	4.5	2.1	1.5	5.0	3.15	3.3	1.8	2.8
CDMPIH10D48/T125	10.7	10.3	5.0	3.4	1.6	7.2	3.95	4.2	1.5	3.5

# Power Inductor CDMPIH Series



## ■ Electrical Characteristics specification.

### ◆ CDMPIH60D48/T125

Sumida P/N	Inductance ( $\mu$ H) at 100KHz	D.C.R. ( $m\Omega$ ) at 20°C	Saturation Current (A) ※1		Temperature Rise Current (A) ※2
			(at 20°C)	(at 125°C)	
CDMPIH60D48T125NP-3R9PC	3.9±25%	33(27)	4.1	3.4	3.5
CDMPIH60D48T125NP-6R2PC	6.2±25%	41(33)	3.2	2.6	3.2
CDMPIH60D48T125NP-100MC	10±20%	58(46)	2.5	2.1	2.5
CDMPIH60D48T125NP-150MC	15±20%	89(71)	2.1	1.7	1.9
CDMPIH60D48T125NP-220MC	22±20%	140(112)	1.7	1.4	1.5
CDMPIH60D48T125NP-330MC	33±20%	208(116)	1.4	1.1	1.2
CDMPIH60D48T125NP-470MC	47±20%	255(204)	1.20	0.95	1.15
CDMPIH60D48T125NP-680MC	68±20%	3.2(242)	0.95	0.80	1.05
CDMPIH60D48T125NP-101MC	100±20%	460(368)	0.80	0.65	0.85

### ◆ CDMPIH75D43/T125

Sumida P/N	Inductance ( $\mu$ H) at 100KHz	D.C.R. ( $m\Omega$ ) at 20°C	Saturation Current (A) ※1		Temperature Rise Current (A) ※2
			(at 20°C)	(at 125°C)	
CDMPIH75D43T125NP-4R7PC	4.7±25%	28(22)	4.4	3.5	3.6
CDMPIH75D43T125NP-6R8PC	6.8±25%	43(34)	3.7	2.9	2.8
CDMPIH75D43T125NP-100MC	10±20%	52(42)	3.1	2.4	2.6
CDMPIH75D43T125NP-150MC	15±20%	65(53)	2.5	1.9	2.4
CDMPIH75D43T125NP-220MC	22±20%	79(63)	2.1	1.6	2.2
CDMPIH75D43T125NP-330MC	33±20%	143(114)	1.7	1.3	1.5
CDMPIH75D43T125NP-470MC	47±20%	210(168)	1.4	1.1	1.2
CDMPIH75D43T125NP-680MC	68±20%	315(253)	1.2	0.9	1.0
CDMPIH75D43T125NP-101MC	100±20%	390(315)	1.00	0.75	0.80
CDMPIH75D43T125NP-151MC	150±20%	585(470)	0.80	0.60	0.65
CDMPIH75D43T125NP-221MC	220±20%	1005(805)	0.65	0.50	0.50

# Power Inductor CDMPIH Series



## ■ Electrical Characteristics specification.

### ◆ CDMPIH10D48/T125

Sumida P/N	Inductance ( $\mu$ H) at 100KHz	D.C.R. ( $m\Omega$ ) at 20°C	Saturation Current (A) ※1		Temperature Rise Current (A) ※2
			(at 20°C)	(at 125°C)	
CDMPIH10D48T125NP-4R3PC	4.3±25%	18.5(15.0)	7.4	5.7	5.5
CDMPIH10D48T125NP-5R6PC	5.6±25%	24.0(19.0)	6.5	5.0	4.8
CDMPIH10D48T125NP-7R5PC	7.5±25%	27.5(22.0)	5.6	4.4	4.4
CDMPIH10D48T125NP-110MC	11±20%	36(29)	4.7	3.6	4.0
CDMPIH10D48T125NP-220MC	22±20%	64(52)	3.3	2.6	3.4
CDMPIH10D48T125NP-330MC	33±20%	103(83)	2.7	2.1	2.2
CDMPIH10D48T125NP-470MC	47±20%	139(112)	2.25	1.75	1.70
CDMPIH10D48T125NP-680MC	68±20%	214(172)	1.85	1.40	1.40
CDMPIH10D48T125NP-101MC	100±20%	275(220)	1.55	1.20	1.25

※1、 Saturation Current: This indicates the value of D.C. current when the inductance decreases to 65% of its nominal value.

※2、 Temperature Rise Current: The actual current when temperature of coil becomes  $\Delta T=40^{\circ}\text{C}$ . ( $T_a=20^{\circ}\text{C}$ )

### For More Information

#### Hong Kong

Tel.+852-2880-6688  
FAX.+852-2565-9600

#### Shanghai

Tel.+86-021-58363299  
FAX.+86-021-58363266

#### Shenzhen

Tel.+86-755-82910228  
FAX.+86-755-82910338

#### Taipei

Tel.+886-2-27065228  
FAX.+886-2-27065229

#### Tokyo

Tel.+81-3-5202-7112  
FAX.+81-3-5202-7105

#### Seoul

Tel.+82-2-6237-0777  
FAX.+82-2-6237-0778

#### Singapore

Tel.+65-6296-3388  
FAX.+65-6296-3390

#### Malaysia

Tel.+60-3-8733-0900  
FAX.+60-3-8737-7384

#### Chicago

Tel.+1-847-545-6700  
FAX. +1-847-545-6720

#### California

Tel.+1-408-321-9660  
FAX. +1-408-321-9308