


# SMD Power Inductor CDRH40D18/A



**sumida**

*Under Development*



## Description

- Ferrite drum core construction.
- Magnetically shielded.
- L × W × H: 4.5 × 4.5 × 2.0 mm Max.
- Product weight: 0.1g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Qualification to AEC-Q200.

## Environmental Data

- Operating temperature range: -40°C~+125°C (excluding coil's self temperature rise)
- Storage temperature range: -40°C~+85°C
- Solder reflow temperature: 260 °C peak.


## Packaging

- Carrier tape and reel packaging.


## Applications

- Automotive and other high temperature, high reliability application.

## Dimension - [mm]

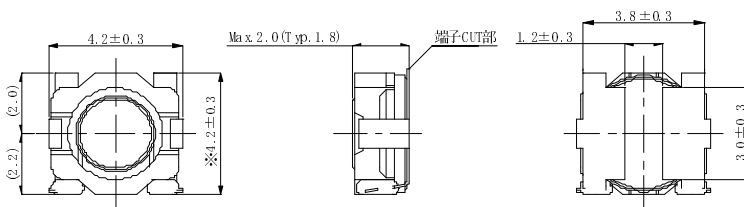

## Land pattern and Schematics - [mm]

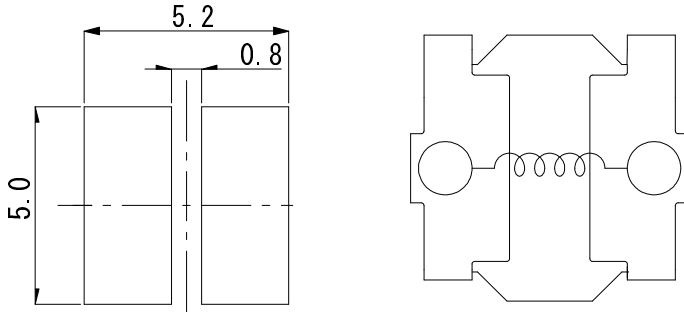

## Electrical Characteristics

Part Name	Stamp	Inductance (μH) [within] ※1	D.C.R. (mΩ) [within] (at 20°C)	Rated Current (mA) (at 125°C) ※2
CDRH40D18ANP-2R2NC	G	2.2 ± 30%	63(50)	1360
CDRH40D18ANP-3R3NC	J	3.3 ± 30%	108(86)	1100
CDRH40D18ANP-4R7NC	A	4.7 ± 30%	128(102)	840
CDRH40D18ANP-6R8NC	B	6.8 ± 30%	205(164)	730
CDRH40D18ANP-100NC	C	10 ± 30%	338(270)	590
CDRH40D18ANP-150NC	D	15 ± 30%	428(342)	490
CDRH40D18ANP-220NC	E	22 ± 30%	615(492)	410
CDRH40D18ANP-330NC	F	33 ± 30%	1175(940)	310
CDRH40D18ANP-470NC	H	47 ± 30%	1500(1200)	280

※1. Measuring condition: at 100 kHz.

※2. Rated current: The DC current at which the inductance decreases to 65% of its nominal value or when Δt=30°C, whichever is lower.










# SMD Power Inductor CDRH40D18/A




*Under Development*

## Saturation Current & Temperature Rise Graph

— L (20°C) — L (155°C) —  $\Delta T$

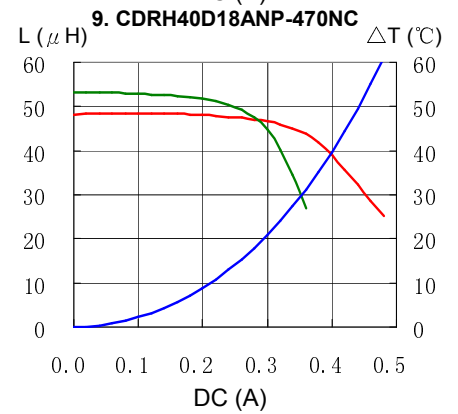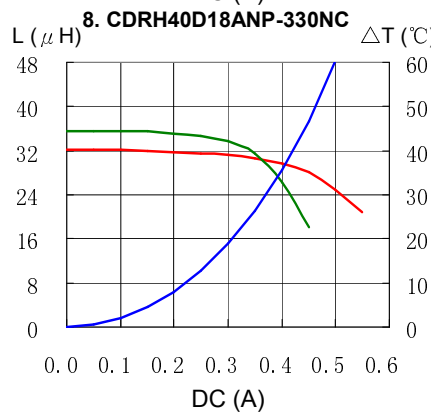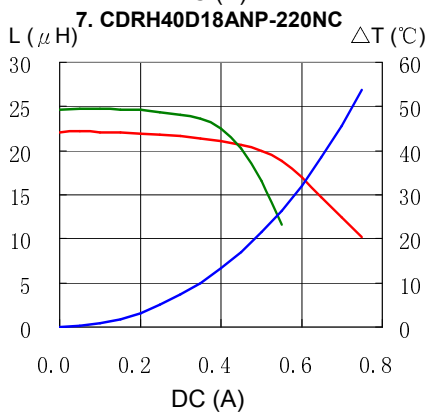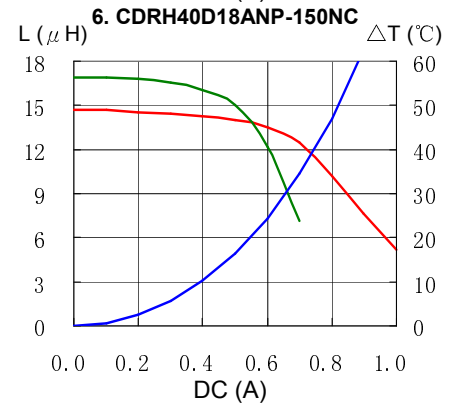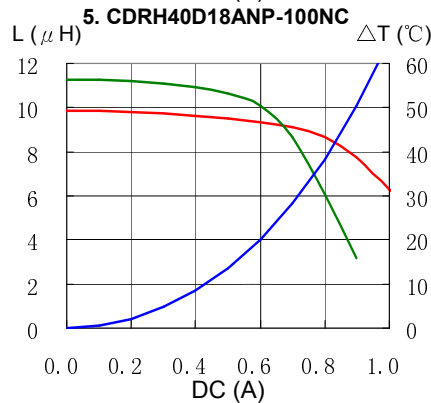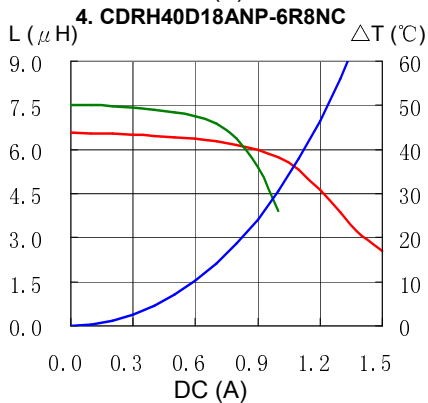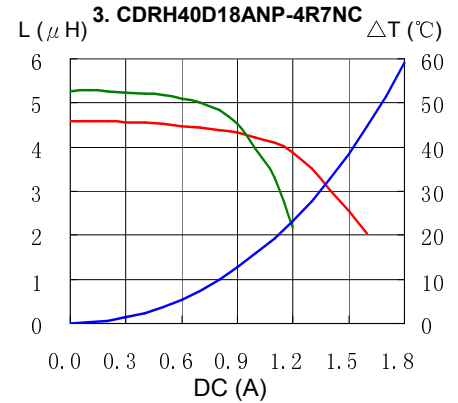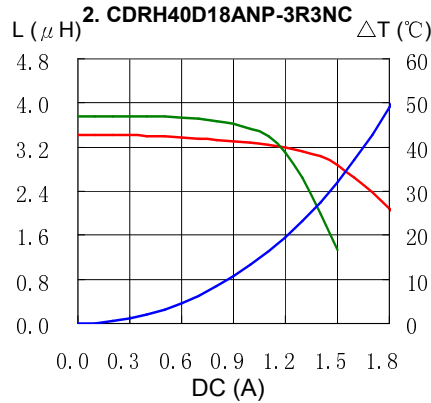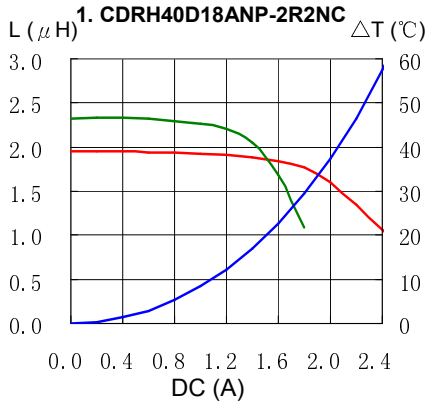



# SMD Power Inductor CDRH40D18/A



 **sumida**

*Under Development*

## Solder Reflow Condition

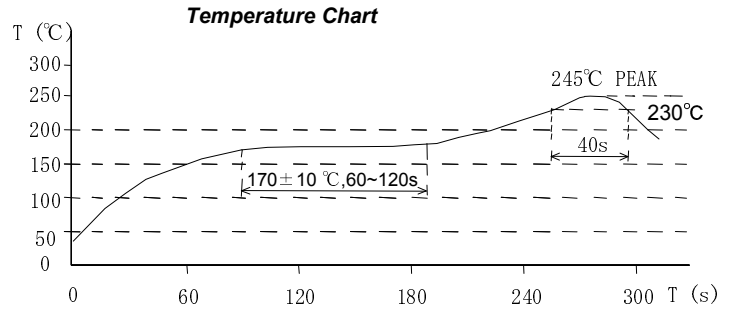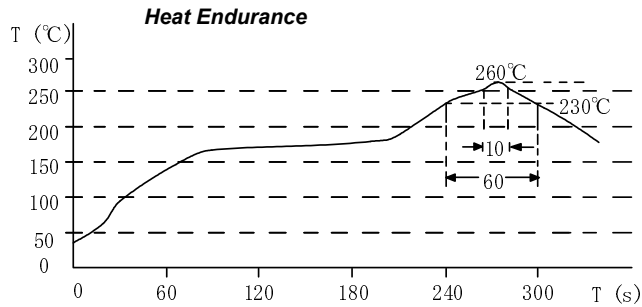

Please refer to the sales offices on our website - <http://www.sumida.com>

### Hong Kong

Tel.+852-2880-6688  
FAX.+852-2565-9600  
[sales@hk.sumida.com](mailto:sales@hk.sumida.com)

### Tokyo

Tel.+81-3-5202-7112  
FAX.+81-3-5202-7105  
[sales@jp.sumida.com](mailto:sales@jp.sumida.com)

### Chicago

Tel.+1-847-545-6700  
FAX. +1-847-545-6720  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

### Shanghai

Tel.+86-021-5836-3299  
FAX.+86-021-5836-3266  
[shanghai.sales@cn.sumida.com](mailto:shanghai.sales@cn.sumida.com)

### Seoul

Tel.+82-2-6237-0777  
FAX.+82-2-6237-0778  
[sales@kr.sumida.com](mailto:sales@kr.sumida.com)

### Oberzell

Tel.+49-8591-937-0  
FAX. +49-8591-937-103  
[contact@sumida-eu.com](mailto:contact@sumida-eu.com)

### Shenzhen

Tel.+86-755-8291-0228  
FAX.+86-755-8291-0338  
[shenzhen.sales@cn.sumida.com](mailto:shenzhen.sales@cn.sumida.com)

### Singapore

Tel.+65-6296-3388  
FAX.+65-6296-3390  
[sales@sg.sumida.com](mailto:sales@sg.sumida.com)

### Neumarkt

Tel.+49-9181-4509-110  
FAX. +49-9181-4509-310  
[infocomp@eu.sumida.com](mailto:infocomp@eu.sumida.com)

### Taipei

Tel.+886-2-8751-2737  
FAX.+886-2-8751-2738  
[sales@tw.sumida.com](mailto:sales@tw.sumida.com)

### San Jose

Tel.+1-408-321-9660  
FAX.+1-408-321-9308  
[sales@us.sumida.com](mailto:sales@us.sumida.com)