

ISSUE 8; April 2016

Description

- Surface mount temperature compensated voltage controlled crystal oscillator (TCVCXO) providing a high degree of frequency stability over a wide temperature range in a hermetically sealed ceramic package and is particularly suited to applications where space is at a premium.



Frequency Parameters

- Frequency: 10.0MHz to 30.0MHz
- Frequency Tolerance: ± 0.50 ppm
- Frequency Stability: ± 1.50 ppm to ± 5.00 ppm
- Ageing: ± 1 ppm typ in 1st year @ 25°C

Electrical Parameters

- Supply Voltage: 3.0V ± 0.15 V
- Supply Voltage Variation: ± 0.2 ppm (5% change)
- Load Variation: ± 0.2 ppm max (10% change)

Frequency Adjustment

- Pulling: ± 3 ppm min to ± 7 ppm max
- Control Voltage: 1.5V ± 1.0 V
- Input Impedance (Pad1): 1.0M Ω min

Operating Temperature Ranges

- 0 to 50°C
- 10 to 60°C
- 20 to 70°C
- 40 to 85°C
- 30 to 85°C

Output Details


- Output Compatibility: Clipped Sine
- Drive Capability: 10k Ω // 10pF $\pm 10\%$
- Output: 0.8Vpk-pk min

Noise Parameters


- Phase Noise (typical @ 13MHz)
 - 80dBc/Hz @ 10Hz
 - 105dBc/Hz @ 100Hz
 - 130dBc/Hz @ 1kHz
 - 140dBc/Hz @ 10kHz

Environmental Parameters

- Shock: MIL-STD-883D, Method 2002.3, Test Condition B: 1500G, 0.5ms, 1/2 sine wave, 3 shocks in each of 3 mutually perpendicular planes
- Vibration: MIL-STD-883D, Method 2005.2, Test Condition B: 20G (20Hz-2000Hz), 1.5mm amplitude, in 3 mutually perpendicular planes, 4hrs in each plane
- Storage Temperature Range: -55 to 125°C

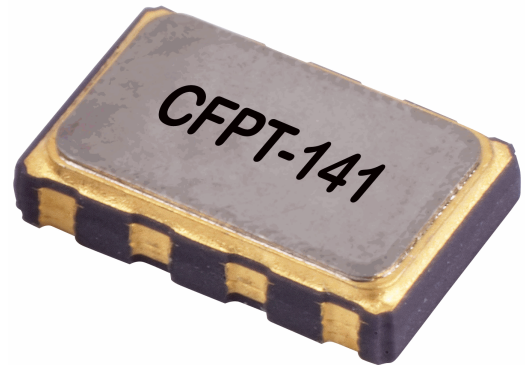


Outline (mm)

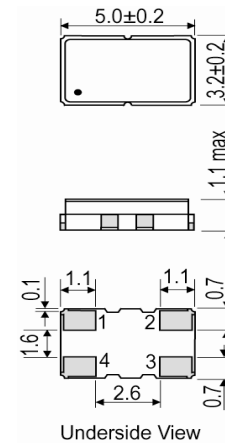


Pad Connections

1. Voltage Control
2. GND
3. Output
4. +Vs

Solder Pad Layout



Test Circuit

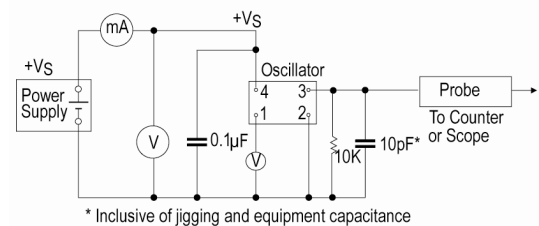

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com

Ordering Information

- Frequency*
- Model*
- Output
- Frequency Stability (over operating temperature range)*
- Operating Temperature Range*
- Supply Voltage
- Example
- 13.0MHz CFPT-141
- Clipped Sine ±2.5ppm -30 to 85C 3V

Compliance

- RoHS Status (2011/65/EU) Compliant
- REACh Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

Packaging Details

- Pack Style: Bulk Loose in bulk pack
Pack Size: 100
- Pack Style: Cutt In tape, cut from a reel
Pack Size: 1
- Pack Style: Reel Tape & reel in accordance with EIA-481-D
Pack Size: 1,000

Electrical Specification - maximum limiting values 3.0V ±0.15V

Frequency Min	Frequency Max	Temperature Range	Stability (Min)	Current Draw	Rise and Fall Time	Duty Cycle
		°C	ppm	mA	ns	%
10.0MHz	30.0MHz	0 to 50	±1.5	2	-	-
		-10 to 60	±1.5	2	-	-
		-20 to 70	±2.0	2	-	-
		-30 to 85	±2.5	2	-	-
		-40 to 85	±2.5	2	-	-

This document was correct at the time of printing; please contact your local sales office for the latest version.
[Click to view latest version on our website.](#)

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com