

ISSUE 13; April 2016

### Description


- Sub 1ppm performance TCXO, a single chip oscillator and analogue compensation circuit operating over an extended temperature range. Its ability to function down to a supply voltage of 2.4V and low power consumption make it particularly suitable for mobile applications.
- -1A No ref voltage, ageing adj option
- 1 = Optional reference voltage output on pad 1, suitable for potentiometer supply or DAC reference: No output (standard option)  
A = Ageing Adjustment:  
>±5ppm, frequency <20MHz  
>±7ppm, frequency >20MHz
- -1B No ref voltage, no freq adj option
- 1 = Optional reference voltage output on pad 1, suitable for potentiometer supply or DAC reference: No output (standard option)  
B = No frequency adjustment initial calibration @ 25°C < ±1.0ppm
- -2A Ref voltage = 2.2V, ageing adj option
- 2 = Reference voltage output on pad 1, for Min. VS>2.4V, suitable for potentiometer supply or DAC reference: 2.2V  
Note: Maximum load current (mA) = Vref/10  
A = Ageing Adjustment:  
>±5ppm, frequency <20MHz  
>±7ppm, frequency >20MHz
- -3A Ref voltage = 2.7V, ageing adj option
- 3 = Reference voltage output on pad 1, for Min. VS>3.0V, suitable for potentiometer supply or DAC reference: 2.7V  
Note: Maximum load current (mA) = Vref/10  
A = Ageing Adjustment:  
>±5ppm, frequency <20MHz  
>±7ppm, frequency >20MHz

### Frequency Parameters

- Frequency 1.25MHz to 40.0MHz
- Frequency Tolerance ±1.00ppm
- Tolerance Condition @ 25°C
- Frequency Stability ±0.30ppm to ±2.50ppm
- Ageing:  
±1ppm max in 1st year, frequency ≤20MHz  
±3ppm max for 10 years (including the 1st year), frequency ≤20MHz  
±2ppm max in 1st year, frequency >20MHz  
±5ppm max for 10 years (including the 1st year), frequency >20MHz
- Supply Voltage Variation (±10% change): ±0.2ppm typ
- Load Variation (±5pF change): ±0.2ppm typ
- After Reflow (measured at least 60mins after reflow): ±1ppm max




Outline (mm) -1A = No ref voltage, ageing adj option

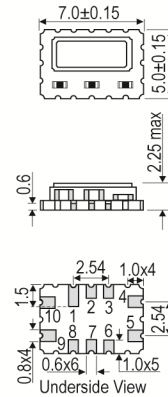

- Pad Connections
1. Vref (N/C if not required)
  2. N/C
  3. Do not connect
  4. GND
  5. Output
  6. N/C
  7. N/C
  8. Tri-state Control (Enable)
  9. +VS
  10. Voltage Control or N/C

#### Solder Pad Layout



### Sales Office Contact Details:

UK: +44 (0)1460 270200

France: 0800 901 383

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)

Germany: 0800 1808 443

USA: +1.760.318.2824

Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)

### Electrical Parameters

- Supply Voltage 3.3V ±10%
- Supply Current:  
 $1 + \text{Frequency(MHz)} * \text{Supply(V)} * \{\text{Load(pF)} + 15\} * 10^{-3}$  mA  
e.g. 20MHz, 3.3V, 15pF ≈ 2mA
- Optional reference voltage output on pad 1, suitable for potentiometer supply or DAC reference:
  - No output (standard option)
  - 2.2V for min  $V_s > 2.4V$
  - 2.7V for min  $V_s > 3.0V$Maximum load current (mA) =  $V_{ref}/10$
- For manual frequency adjustment connect an external 50kΩ potentiometer between pad 1 (Reference Voltage) and pad 4 (GND) with wiper connected to pad 10 (Voltage Control). Please specify reference voltage as part of the ordering code.
- Note: Supply Voltages in the range 2.4V to 6.0V are available, please contact an IQD Sales Office

### Frequency Adjustment

- Slope: Positive
- Standard Voltage Control Ranges:  
Without Reference Voltage  $V_s = 3.3V$  1.65V ±1.0V  
With Reference Voltage  $V_s = 0V$  to  $V_{ref}$
- Linearity: 1% max
- Input Impedance: 100kΩ min
- Modulation Bandwidth: 2kHz min
- A. Pulling:-  
≥±5ppm, frequency ≤20MHz  
≥±7ppm, frequency >20MHz
- B. No frequency adjustment initial calibration @ 25°C ±1.0ppm
- C. High Pulling ±10ppm to ±50ppm can be available depending on frequency and stability options (please contact an IQD Sales Office)

### Operating Temperature Ranges

- 0 to 50°C
- 20 to 70°C
- 0 to 70°C
- 30 to 75°C
- 40 to 85°C

### Output Details

- Output Compatibility HCMOS
- Drive Capability 15pF

### Output Control

- Tri-state Operation:  
Logic '1' (>60%  $V_s$ ) or no connection to pad 8 enables output  
Logic '0' (<20%  $V_s$ ) to pad 8 disables output  
When at logic '0' the output stage is disabled for all output options, but the oscillator and compensation circuit are still active (current consumption <1mA)

### Output Levels

- VoL: <10%  $V_s$
- VoH: >90%  $V_s$

### Sales Office Contact Details:

UK: +44 (0)1460 270200  
Germany: 0800 1808 443

France: 0800 901 383  
USA: +1.760.318.2824

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)

#### Noise Parameters

- Phase Noise (typical for 13.0MHz @ 25°C):
  - 65dBc/Hz @ 1Hz
  - 95dBc/Hz @ 10Hz
  - 120dBc/Hz @ 100Hz
  - 135dBc/Hz @ 1kHz
  - 140dBc/Hz @ 10kHz
  - 145dBc/Hz @ 100kHz

#### Environmental Parameters

- Shock: IEC 60068-2-27, Test Ea: 1500G acceleration for 0.5ms, half sine pulse, 3 shocks in each of 3 mutually perpendicular planes
- Vibration: IEC 60068-2-6, Test Fc: 10Hz-60Hz, 1.5mm displacement, 60-2000Hz at 10G, 30mins in 3 mutually perpendicular planes at 1oct/min
- Solderability: MIL-STD-202, Method 208, Category 3
- Storage Temperature Range: -55 to 125°C

#### Manufacturing Details

- Pb-free Reflow Soldering: 260°C max for 30sec max

#### Ordering Information

- Frequency\*  
Model\*  
Reference Voltage + Frequency Adjustment Options\*  
Output\*  
Frequency Stability (over operating temperature range)\*  
Operating Temperature Range\*  
Supply Voltage  
(\*minimum required)
- Example  
10.0MHz CFPT-9006-1A  
HCMOS ±1.0ppm -20 to 70C 3.3V
- Note: Certain frequency stability / temperature range combinations may not be available for all frequencies.

#### Compliance

- RoHS Status (2011/65/EU)      Compliant
- REACH Status                      Compliant
- MSL Rating (JDEC-STD-033):    1

#### Packaging Details

- Pack Style: Reel      Tape & reel in accordance with EIA-481-D  
Pack Size: 1,000
- Pack Style: Bulk      Loose in bulk pack  
Pack Size: 10

#### Electrical Specification - maximum limiting values 3.3V ±10%

Frequency Min	Frequency Max	Temperature Range	Stability	Current Draw	Rise and Fall Time	Duty Cycle
		°C	ppm	mA	ns	%
1.25MHz	40.0MHz	0 to 50	±0.3	-	8	45/55%
		-20 to 70	±0.5	-	8	45/55%
		-30 to 75	±1.0	-	8	45/55%
		-40 to 85	±1.0	-	8	45/55%

This document was correct at the time of printing; please contact your local sales office for the latest version.

[Click to view latest version on our website.](#)

#### Sales Office Contact Details:

UK: +44 (0)1460 270200

France: 0800 901 383

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)

Germany: 0800 1808 443

USA: +1.760.318.2824

Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)

Chipset Approval Table

IQD Model	Frequency	Chipset Type	IC Supplier
E2747LF	12.8MHz	ACS1790T, ACS9510, ACS9520T, ACS9522T, ACS9550, ACS9593T, ACS8522BT, ACS8509, ACS8510, ACS8514, ACS8515, ACS8520, ACS8520A, ACS8522	Semtech
E2747LF	20MHz	ZL30152, ZL30155, ZL30157, ZL30159, ZL30160, ZL30165	Microsemi
E2799LF	12.8MHz	ACS1790T, ACS9510, ACS9520T, ACS9522T, ACS9550, ACS9593T, ACS8522BT, ACS8509, ACS8510, ACS8514, ACS8515, ACS8520, ACS8520A, ACS8522	Semtech
E2801LF	20MHz	ZL30152, ZL30155, ZL30157, ZL30159, ZL30160, ZL30165	Microsemi
E2912LF	12.8MHz	ACS1790T, ACS9510, ACS9520T, ACS9522T, ACS9550, ACS9593T, ACS8522BT, ACS8509, ACS8510, ACS8514, ACS8515, ACS8520, ACS8520A, ACS8522	Semtech
E3179LF	20MHz	ZL30152, ZL30155, ZL30157, ZL30159, ZL30160, ZL30165	Microsemi
E3179LF	20MHz	BCM544841	Broadcom
E3198LF	12.8MHz	ACS1790T, ACS9510, ACS9520T, ACS9522T, ACS9550, ACS9593T, ACS8522BT, ACS8509, ACS8510, ACS8514, ACS8515, ACS8520, ACS8520A, ACS8522	Semtech
E3199LF	20MHz	ZL30152, ZL30155, ZL30157, ZL30159, ZL30160, ZL30165	Microsemi
E3394LF	12.8MHz	ACS1790T, ACS9510, ACS9520T, ACS9522T, ACS9550, ACS9593T, ACS8522BT, ACS8509, ACS8510, ACS8514, ACS8515, ACS8520, ACS8520A, ACS8522	Semtech
E4940LF	25MHz	ZL30152, ZL30155, ZL30157, ZL30159, ZL30160, ZL30165	Broadcom
E5624LF	12.8MHz	82V32### WAN PLLs	IDT

Sales Office Contact Details:

UK: +44 (0)1460 270200  
Germany: 0800 1808 443

France: 0800 901 383  
USA: +1.760.318.2824

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)