

CGJ5L2X7R0J475K160AA

TDK Item Description : CGJ5L2X7R0J475KT****




Application & Main Feature


High Reliability Grade (General (Up to 50V))

Series

CGJ5(3216) [EIA CC1206]



DC Bias Characteristic

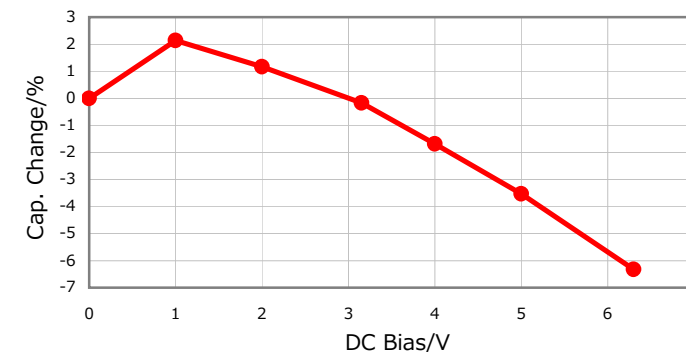

Dimensions

L 3.20mm +0.3,-0.1mm
W 1.60mm +0.3,-0.1mm
T 1.60mm +0.3,-0.1mm
B 0.20mm Min.
G 1.00mm Min.

Temperature Characteristic

X7R (-55 to 125 degC +/-15%)

Rated Voltage

0J (6.3Vdc)

Capacitance

4.7uF

Capacitance Tolerance

K (+/-10%)

Dissipation Factor

7.5% Max.


Insulation Resistance

21Mohm Min.


AEC-Q200

Yes


|Z|, ESR vs. Freq. Characteristics

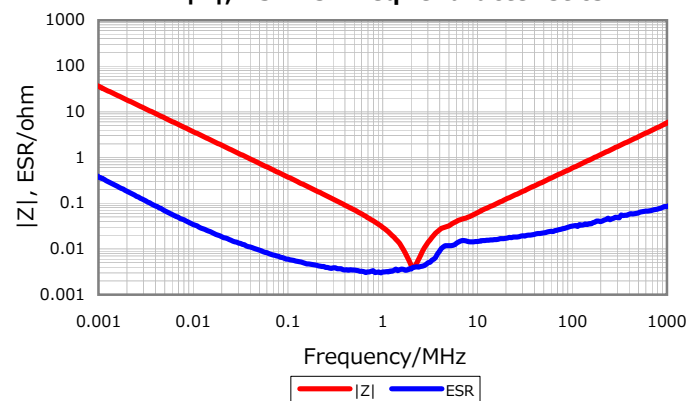


Temperature Characteristics

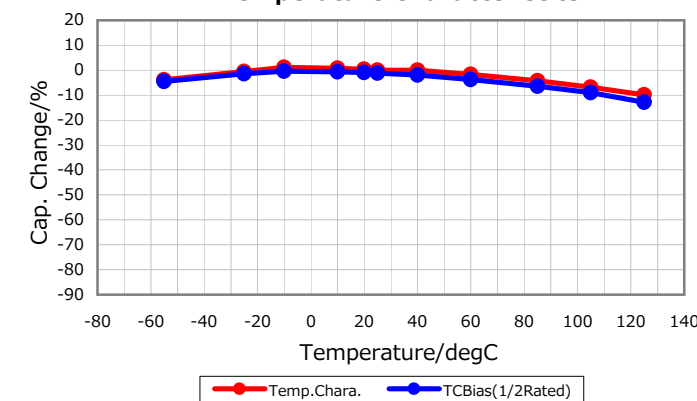

Cap. vs. Freq. Characteristic

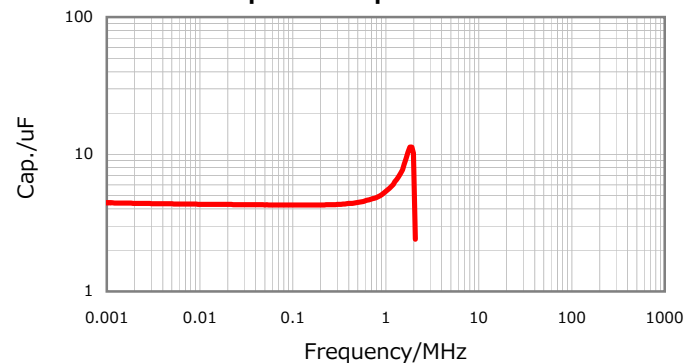

Ripple Temperature Rise Characteristics

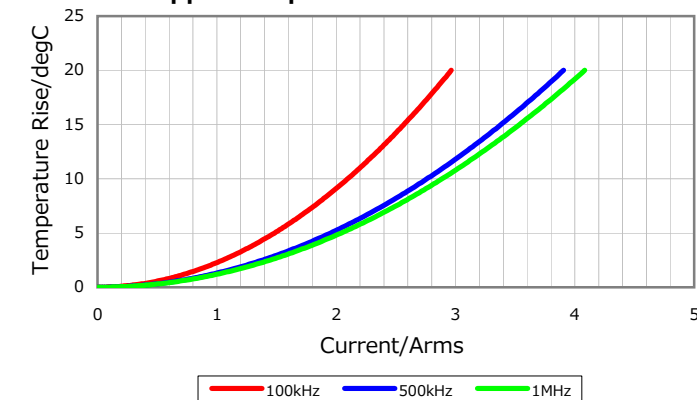

All specifications are subject to change without notice.

January 4, 2016