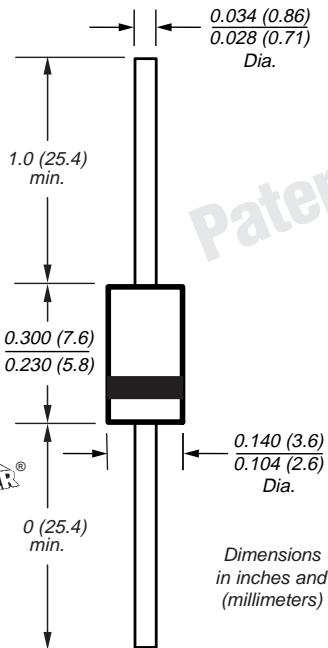


Miniature Clamper/Damper Glass Passivated Rectifier

DO-204AC (DO-15)


* Glass-plastic encapsulation technique is covered by Patent No. 3,996,602 and brazed-lead assembly by Patent No. 3,930,306.

 Reverse Voltage 1400 to 1500V
 Forward Current 1.5A

Features

- Specially designed for clamping circuits, horizontal deflection systems and damper applications
- Plastic package has Underwriters Laboratory Flammability Classification 94V-0.
- High temperature metallurgically bonded construction
- Cavity-free glass passivated junction
- 1.5 ampere operation at TA=50°C with no thermal runaway
- Typical IR less than 0.1µA
- Capable of meeting environmental standards of MIL-S-19500
- High temperature soldering guaranteed: 350°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

Mechanical Data

Case: JEDEC DO-204AC, molded plastic over glass body

Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.015 oz., 0.4 g

Maximum Ratings & Thermal Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	CGP15	DGP15	Unit
Maximum repetitive peak reverse voltage	VRMM	1400	1500	V
Maximum RMS voltage	VRMS	980	1050	V
Maximum DC blocking voltage	VDC	1400	1500	V
Maximum average forward rectified current 0.375" (9.5mm) lead length at TA = 50°C	IF(AV)	1.5		A
Peak forward surge current 8.3ms single half sine wave superimposed on rated load (JEDEC Method)	IFSM	40		A
Maximum full load reverse current full cycle average 0.375" (9.5mm) lead length at TA = 100°C	IR(AV)	50		µA
Typical thermal resistance (Note 1)	R _{θJA}	55		°C/W
Operating junction and storage temperature range	T _J , T _{STG}	-65 to +175		°C

Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	CGP15	DGP15	Unit
Maximum instantaneous forward voltage at 1.0A	V _F	1.1		V
Maximum DC reverse current TA = 25°C TA = 100°C	IR	5.0 100		µA
Maximum reverse recovery time at IF = 0.5A, IR = 50mA	trr	15	20	µs
Maximum reverse recovery time at IF=0.5A, IR=1.0A, Irr=0.25A typical maximum	trr	1.0 1.5		µs
Typical junction capacitance at 4.0V, 1MHz	C _J	15		pF

Note: (1) Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

CGP15 and DGP15

Vishay Semiconductors
formerly General Semiconductor



Ratings and Characteristic Curves (TA = 25°C unless otherwise noted)

