

24-30GHz Medium Power Amplifier


GaAs Monolithic Microwave IC

preliminary

Description

The CHA5390 is a high gain broadband four-stage monolithic medium power amplifier. It is designed for a wide range of applications, from military to commercial communication systems. The backside of the chip is both RF and DC grounded. This helps simplify the assembly process.


The circuit is manufactured with a PM-HEMT process, 0.25µm gate length, via holes through the substrate, air bridges and electron beam gate lithography. It is available in chip form.

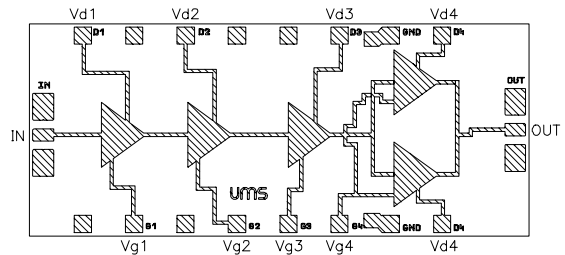

Main Features

- Broadband performances : 24-30GHz
- 25dBm output power.
- 24dB gain
- Good broadband matchings
- Low DC power consumption, 460mA @ 5V
- Chip size : 2.99 X 1.31 X 0.10 mm

Typical in JIG measurements :

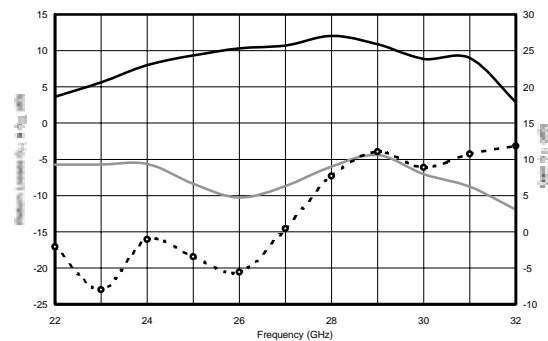

Input Loss : grey solid line - Output Loss : dash line.

Main Characteristics

Tamb. = 25°C

	Parameter	Min	Typ	Max	Unit
Fop	Operating frequency range	24		30	GHz
G	Small signal gain	21	24		dB
P01	Output power at 1dB gain compression	24	25		dBm
Id	Bias current		460	720	mA

ESD Protection : Electrostatic discharge sensitive device. Observe handling precautions !

Electrical Characteristics for Broadband Operation

Tamb = +25°C, Vd1,2,3,4 = 5V Id=460mA

Symbol	Parameter	Min	Typ	Max	Unit
Fop	Operating frequency range	24		30	GHz
G	Small signal gain (1)	21 (2)	24 (2)		dB
ΔG	Small signal gain flatness (1)		± 2		dB
Is	Reverse isolation		50		dB
P1dB	Pulsed output power at 1dB compression (1)	24	25		dBm
IP3	3 rd order intercept point		33		dBm
PAE	Power added efficiency at saturation		16		%
VSWRin	Input VSWR			3.0:1	
VSWRout	Output VSWR			3.0:1	
Id	Bias current		460	720	mA

(1) On Wafer measurements

(2) [26-29 GHz]: 24dB min [24-31 GHz]: 21dB min

For Tj<175°C (80°C ambient), Id should be below 475mA under 5V bias.

Current source biasing network is recommended.

Absolute Maximum Ratings

Tamb. = 25°C (1)

Symbol	Parameter	Values	Unit
Vd	Drain bias voltage	6.0	V
Id	Drain bias current	720	mA
Vg	Gate bias voltage	-2.0 to +0.4	V
Pin	Maximum peak input power overdrive (2)	+15	dBm
Ta	Operating temperature range	-40 to +85	°C
Tstg	Storage temperature range	-55 to +155	°C


(1) Operation of this device above anyone of these parameters may cause permanent damage.

(2) Duration < 1s.

Typical Scattering Parameters (On wafer *Sij* measurements)

Bias Conditions : $V_{d1,2,3,4} = 5$ Volt, $V_{g1}=V_{g2,3,4}$ for I_d total = 460 mA.


Freq GHz	S11 dB	S11 /°	S12 dB	S12 /°	S21 dB	S21 /°	S22 dB	S22 /°
10,00	-0,29	130,16	-75,37	-43,42	-34,97	121,53	-0,06	-86,95
11,00	-0,28	124,05	-81,16	-71,65	-28,63	83,18	-0,15	-96,45
12,00	-0,37	116,99	-72,11	-126,26	-22,61	38,63	-0,22	-107,06
13,00	-0,44	110,04	-67,15	-168,43	-16,98	-5,99	-0,60	-118,07
14,00	-0,52	101,55	-62,83	161,43	-11,59	-54,05	-1,15	-129,62
15,00	-0,72	92,63	-70,09	78,51	-6,39	-103,80	-1,82	-142,41
16,00	-0,90	82,31	-71,91	128,46	-1,14	-160,60	-3,31	-155,90
17,00	-1,27	70,45	-76,18	107,49	2,51	145,18	-4,18	-169,19
18,00	-1,67	56,58	-64,68	23,57	6,33	87,15	-5,81	178,80
19,00	-2,46	39,70	-57,90	-132,71	10,08	29,84	-7,79	163,19
20,00	-3,43	20,21	-70,93	-36,12	12,99	-40,94	-12,99	172,06
21,00	-4,70	-3,92	-72,62	-152,80	16,09	-93,03	-14,82	133,35
22,00	-6,51	-32,14	-63,69	-136,16	18,62	-165,91	-29,66	66,63
23,00	-8,25	-65,38	-63,11	-140,18	19,93	124,97	-19,94	-63,84
24,00	-9,14	-101,40	-58,44	139,63	21,09	56,97	-12,89	-82,46
25,00	-8,55	-132,96	-61,00	143,50	21,95	-10,22	-10,26	-100,64
26,00	-7,35	-166,59	-57,18	129,53	22,91	-80,46	-8,40	-116,75
27,00	-6,98	162,62	-58,79	86,49	24,06	-154,23	-7,08	-132,67
28,00	-7,08	131,98	-59,95	98,53	24,67	120,37	-6,87	-152,96
29,00	-8,55	104,51	-53,56	39,77	24,75	27,75	-7,49	-160,23
30,00	-10,35	86,80	-56,73	63,65	22,41	-81,77	-5,44	173,15
31,00	-10,35	55,09	-56,70	39,90	15,27	167,03	-5,66	134,04
32,00	-10,57	12,96	-60,16	8,74	5,20	76,86	-7,23	94,35
33,00	-9,06	-29,71	-60,33	3,48	-5,52	4,57	-8,61	52,15
34,00	-5,85	-67,30	-62,25	10,68	-13,87	-54,17	-8,80	13,41
35,00	-4,00	-102,02	-57,44	106,73	-25,98	-129,57	-7,32	-20,49
36,00	-2,75	-128,52	-50,88	63,61	-40,47	149,77	-5,61	-44,58
37,00	-2,05	-147,84	-54,34	37,74	-54,58	67,95	-4,56	-65,34
38,00	-1,57	-163,57	-52,72	21,62	-57,99	-11,22	-3,80	-81,87
39,00	-1,31	-176,44	-49,31	8,02	-44,73	-27,42	-2,84	-96,60
40,00	-1,13	172,84	-46,92	-24,29	-46,12	-20,40	-2,52	-109,78
41,00	-0,92	163,42	-50,28	-74,06	-50,08	-74,61	-2,34	-121,05
42,00	-0,78	154,77	-53,84	-95,08	-51,70	-137,05	-1,76	-132,13
43,00	-0,68	146,73	-52,16	-99,63	-53,15	-122,09	-1,64	-141,28
44,00	-0,65	139,75	-52,59	-134,12	-50,20	-107,23	-1,46	-149,16
45,00	-0,54	133,59	-61,38	-168,80	-54,54	110,71	-1,40	-157,67
46,00	-0,36	127,43	-51,37	122,79	-39,96	-168,88	-1,33	-165,36
47,00	-0,27	121,26	-46,98	89,44	-35,22	-157,54	-1,26	-171,65
48,00	-0,34	115,63	-41,66	36,57	-32,62	-134,30	-1,02	-179,72
49,00	-0,36	110,09	-51,95	3,01	-39,27	-123,83	-1,07	174,56
50,00	-0,33	104,27	-48,05	39,26	-35,81	-4,84	-1,07	168,39




Typical In JIG Measurements

Bias Conditions : Vd1,2,3,4 = 5 Volt, Vg1,2,3,4 for Id = 460 mA


In JIG Scattering Parameters

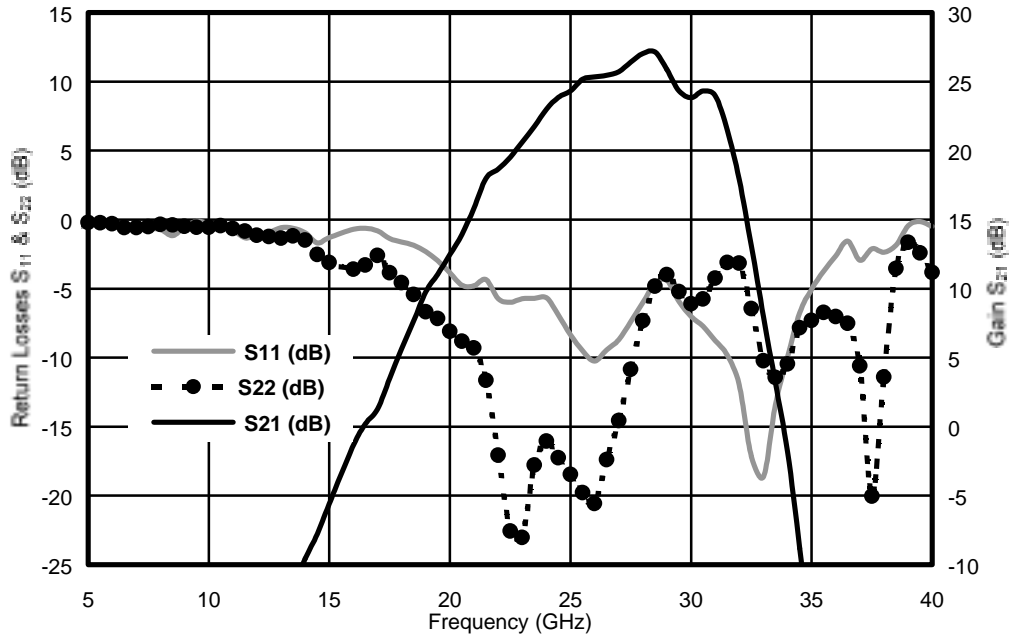


Power Measurements

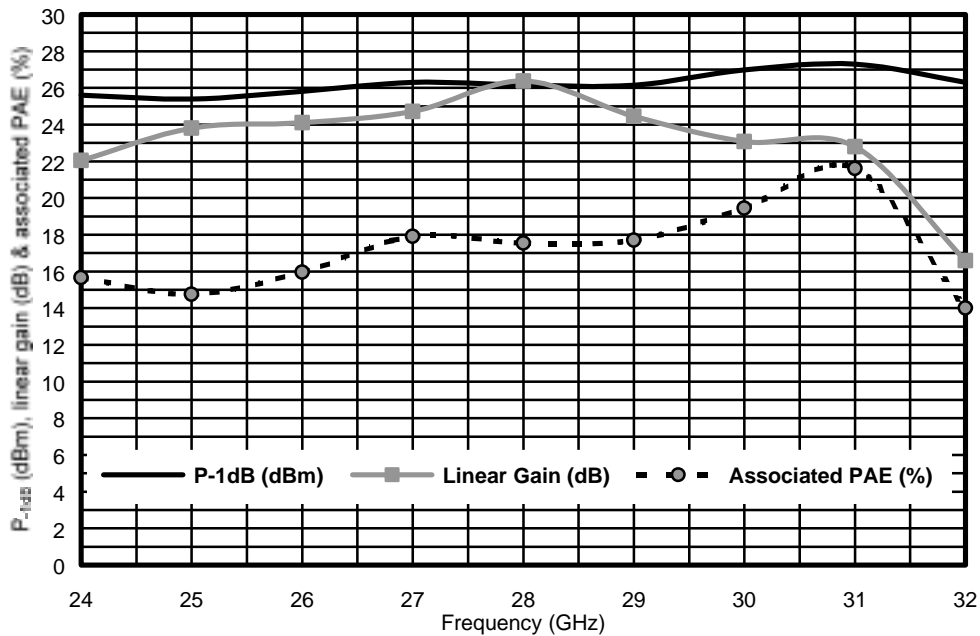

Chip Assembly and Mechanical Data

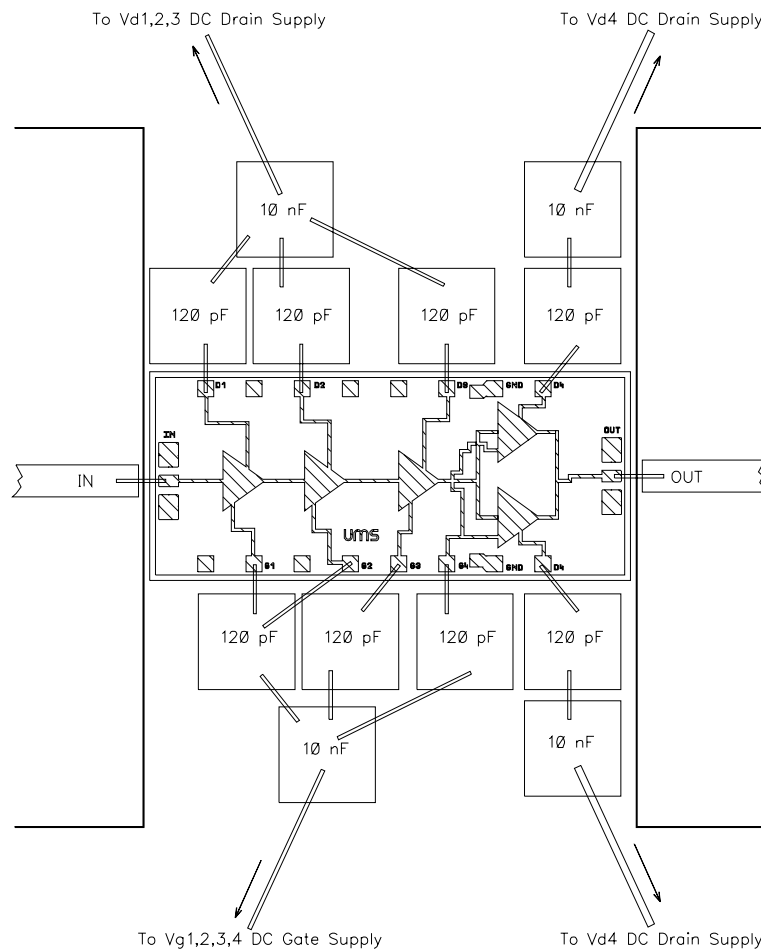

Note : Supply feed should be capacitively bypassed. 25µm diameter gold wire is recommended

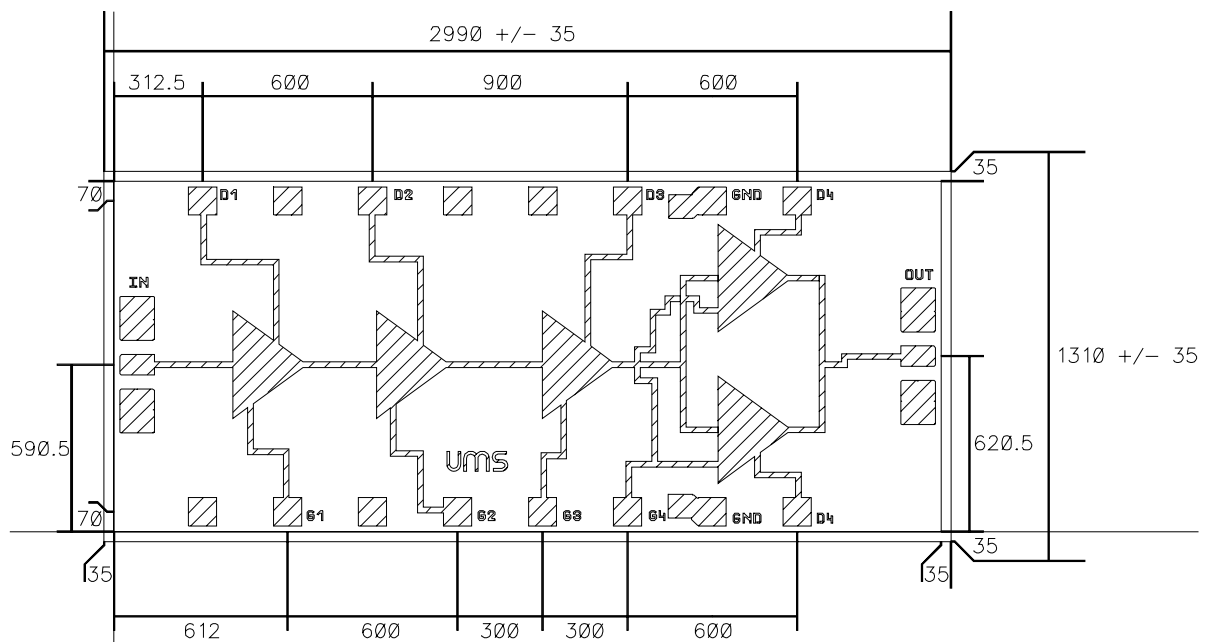


Bonding pad positions

Ref. : CHA53901012 - 12-Jan.-01

6/6

Specifications subject to change without notice

(Chip thickness : 100 μ m. All dimensions are in micrometers)



Ordering Information

Chip form : CHA5390-99F

Information furnished is believed to be accurate and reliable. However **United Monolithic Semiconductors S.A.S.** assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of **United Monolithic Semiconductors S.A.S.** Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. **United Monolithic Semiconductors S.A.S.** products are not authorised for use as critical components in life support devices or systems without express written approval from **United Monolithic Semiconductors S.A.S.**