



Features

- DC to 1 GHz
- Flanged model
- Low VSWR

Applications

- High power RF transmission

CHF12545CBF Series 500 W Power RF Flanged Chip Termination


General Specifications

SubstrateBeo
 Resistive Film.....Thick Film
 TabAg
 Cover Substrate.....AL203
 Mounting FlangeCu plated with Ni
 Resistance.....50 Ω
 Tolerance.....±5 %
 Packaging20 pcs./tray


Absolute Ratings

Power.....500 W
 Frequency1.0 GHz
 VSWR.....1.1 Maximum

Characteristic Curve

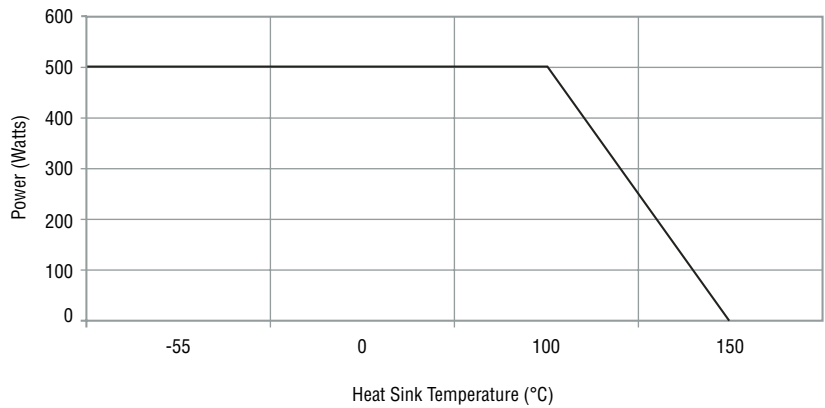

Product Dimensions

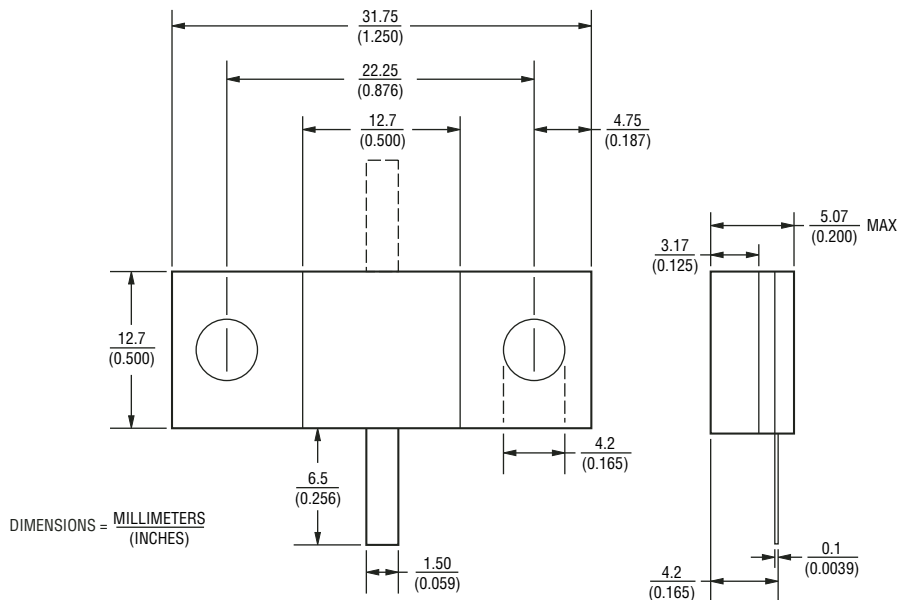

Reliable Electronic Solutions

Asia-Pacific:
 Tel: +886-2 2562-4117
 Fax: +886-2 2562-4116

Europe:
 Tel: +41-41 768 5555
 Fax: +41-41 768 5510

The Americas:
 Tel: +1-951 781-5500
 Fax: +1-951 781-5700

www.bourns.com

How To Order

CHF 12545 C B F 500 L

Model _____
 Size _____
 Version _____
 Substrate _____
 Mount _____
 F = Flange
 Value _____
 500 = 50 Ohm
 Function _____
 L = Termination
 R = Resistor

www.DataSheet4U.com