



Features

- DC to 3.0 GHz
- Flanged model
- Low VSWR
- Beryllium Oxide ceramic

Applications

- High power RF transmission

CHF9838CBF Series 250 W Power RF Flanged Chip Termination


General Specifications

Substrate	Beo
Resistive Film.....	Thick Film
Tab	Ag
Cover Substrate.....	AL2O3
Mounting Flange	Cu plated with Ni
Resistance.....	50 Ω
Tolerance	±5 %
Packaging60 pcs./tray


Absolute Ratings

Power.....	250 W
Frequency	3.0 GHz
VSWR.....	1.25 Maximum

Characteristic Curve

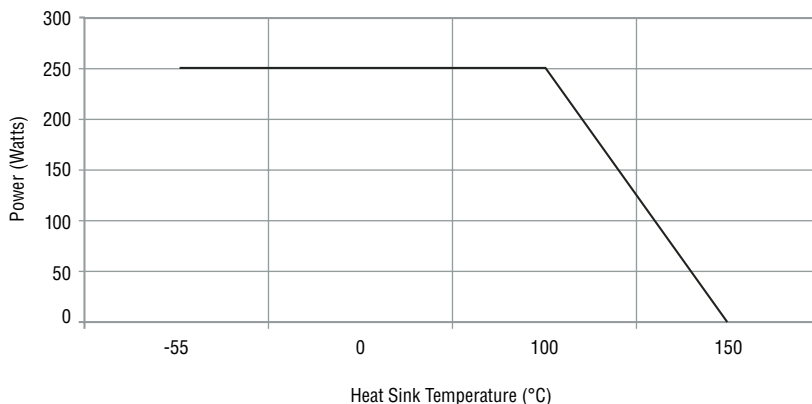

Product Dimensions

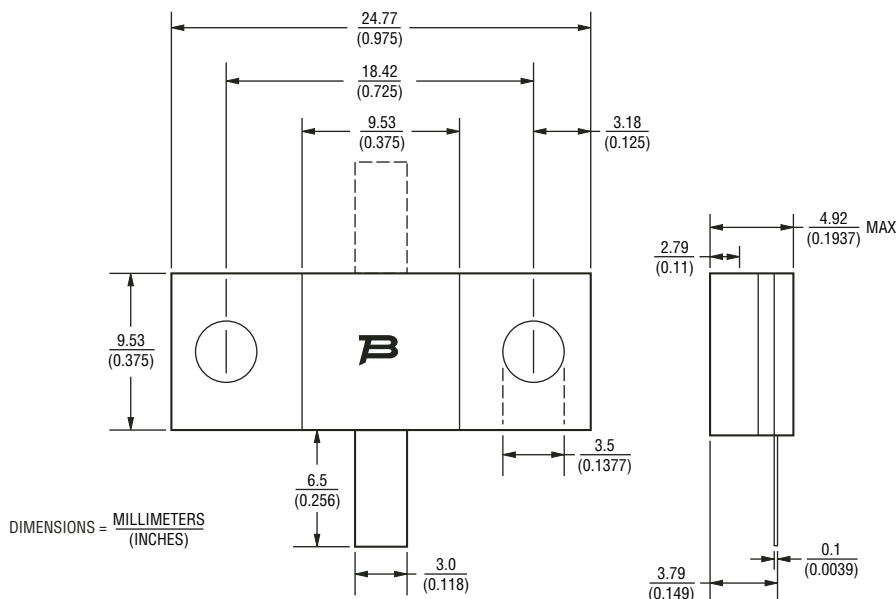

Reliable Electronic Solutions

Asia-Pacific:

Tel: +886-2 2562-4117
Fax: +886-2 2562-4116

Europe:

Tel: +41-41 768 5555
Fax: +41-41 768 5510

The Americas:

Tel: +1-951 781-5500
Fax: +1-951 781-5700

www.bourns.com

How To Order

Model	CHF 9838 C B F 500 L
Size	
Version	
Substrate	
Mount	
F = Flange	
Value	500 = 50 Ohm
Function	L = Termination