



CHENMKO ENTERPRISE CO.,LTD

CHM4410BJPT

SURFACE MOUNT

N-Channel Enhancement Mode Field Effect Transistor

VOLTAGE 30 Volts CURRENT 12.5 Ampere

Lead free devices

APPLICATION

- * Servo motor control.
- * Power MOSFET gate drivers.
- * Other switching applications.

FEATURE

- * Small flat package. (SO-8)
- * Super high dense cell design for extremely low R_{DS(ON)}.
- * High power and current handling capability.
- * Lead free product is acquired.


CONSTRUCTION

- * N-Channel Enhancement

www.DataSheet4U.com




SO-8

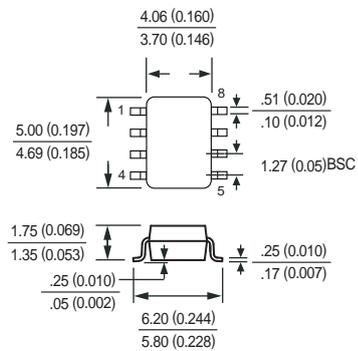

Dimensions in millimeters

SO-8

CIRCUIT

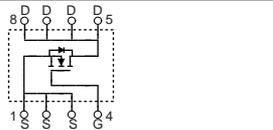

Absolute Maximum Ratings T_A = 25°C unless otherwise noted

Symbol	Parameter	CHM4410BJPT	Units
V _{DSS}	Drain-Source Voltage	30	V
V _{GSS}	Gate-Source Voltage	±20	V
I _D	Maximum Drain Current - Continuous	12.5	A
	- Pulsed (Note 3)	50	
P _D	Maximum Power Dissipation	2500	mW
T _J	Operating Temperature Range	-55 to 150	°C
T _{STG}	Storage Temperature Range	-55 to 150	°C

- Note : 1. Surface Mounted on FR4 Board , t <=10sec
 2. Pulse Test , Pulse width <= 300us , Duty Cycle <= 2%
 3. Repetitive Rating , Pulse width limited by maximum junction temperature
 4. Guaranteed by design , not subject to production trsting

Thermal characteristics

R _{θJA}	Thermal Resistance, Junction-to-Ambient (Note 1)	50	°C/W
------------------	--	----	------

2006-02

www.DataSheet4U.com

RATING CHARACTERISTIC CURVES (CHM4410BJPT)

Electrical Characteristics $T_A = 25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Conditions	Min	Typ	Max	Units
--------	-----------	------------	-----	-----	-----	-------

OFF CHARACTERISTICS

BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS} = 0\text{ V}, I_D = 250\ \mu\text{A}$	30			V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS} = 30\text{ V}, V_{GS} = 0\text{ V}$			1	μA
I_{GSSF}	Gate-Body Leakage	$V_{GS} = 20\text{ V}, V_{DS} = 0\text{ V}$			+100	nA
I_{GSSR}	Gate-Body Leakage	$V_{GS} = -20\text{ V}, V_{DS} = 0\text{ V}$			-100	nA

ON CHARACTERISTICS (Note 2)

$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_D = 250\ \mu\text{A}$	1		3	V
$R_{DS(ON)}$	Static Drain-Source On-Resistance	$V_{GS}=10\text{V}, I_D=10\text{A}$		7.5	9.5	m Ω
		$V_{GS}=4.5\text{V}, I_D=5\text{A}$		11	14	
g_{FS}	Forward Transconductance	$V_{DS} = 15\text{V}, I_D = 10\text{A}$		18		S

SWITCHING CHARACTERISTICS (Note 4)

Q_g	Total Gate Charge	$V_{DS}=15\text{V}, I_D=10\text{A}$ $V_{GS}=10\text{V}$		57	68	nC
Q_{gs}	Gate-Source Charge			9		
Q_{gd}	Gate-Drain Charge			16		
t_{on}	Turn-On Time	$V_{DD}= 10\text{V}$ $I_D = 1.0\text{A}, V_{GS} = 10\text{ V}$ $R_{GEN} = 6\ \Omega$		33	65	nS
t_r	Rise Time			60	108	
t_{off}	Turn-Off Time			65	117	
t_f	Fall Time			50	90	

DRAIN-SOURCE DIODE CHARACTERISTICS AND MAXIMUM RATINGS

I_S	Drain-Source Diode Forward Current	(Note 1)			2.3	A
V_{SD}	Drain-Source Diode Forward Voltage	$I_S = 2.3\text{A}, V_{GS} = 0\text{ V}$ (Note 2)			1.2	V

RATING CHARACTERISTIC CURVES (CHM4410BJPT)

Typical Electrical Characteristics

Figure 1. Output Characteristics

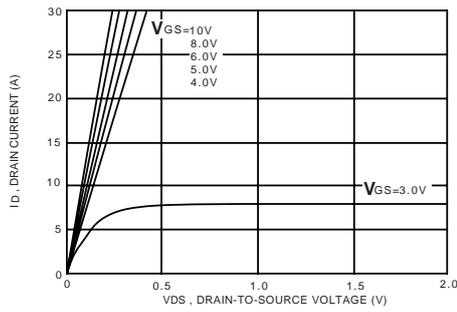


Figure 2. Transfer Characteristics

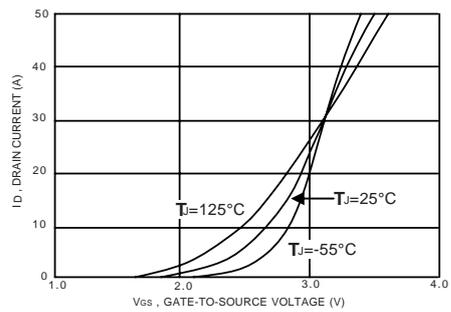


Figure 3. Gate Charge

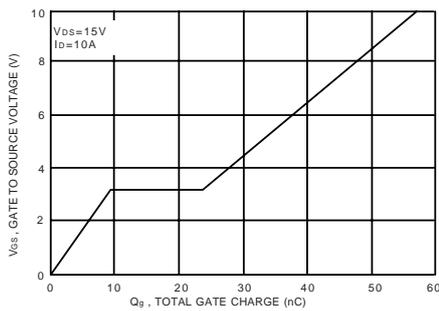


Figure 4. On-Resistance Variation with Temperature

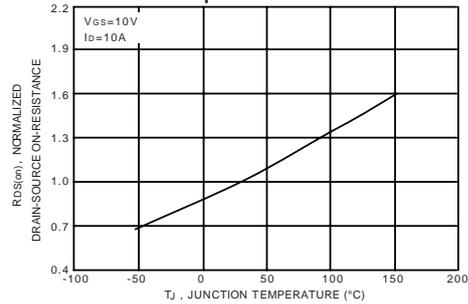


Figure 5. Gate Threshold Variation with Temperature

