

CJ75XXS

INTRODUCTION


The CJ75XXS Series are a group of positive voltage regulators manufactured by CMOS technologies with low power consumption and low dropout voltage, which provide large output currents even when the difference of the input-out-put voltage is small.

The CJ75XXS Series can deliver 300 mA output current and allow an input voltage as high as 36V. The series are very suitable for the battery powered equipments, such as RF applications and other systems requiring a quiet voltage source.


FEATURES

- Low Quiescent Current: 2 μ A
- Operating Voltage Range: 2.5V~36V
- Output Current: 300mA
- Low Dropout Voltage:
200mV@100mA($V_{OUT}=3.3V$)
- Output Voltage: 1.2~ 12V
- High Accuracy: $\pm 1\%$ (Typ.)
- High Power Supply Rejection Ratio:
70dB@1kHz
- Low Output Noise:
27x V_{OUT} μ V_{RMS}(10Hz~100kHz)
- Excellent Line and Load Transient Response
- Built-in Current Limiter, Short-Circuit Protection
- Over-Temperature Protection

BLOCK DIAGRAM

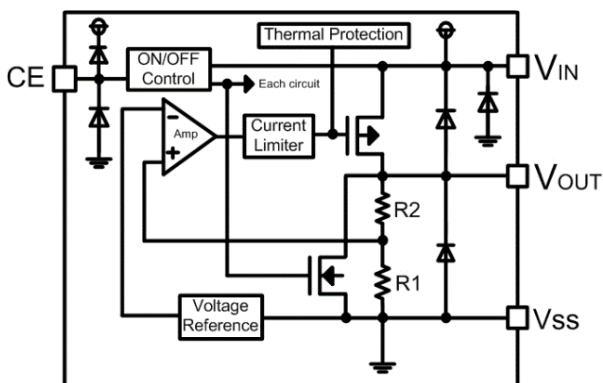

SOT-89-3L



1.GND


2.IN

3.OUT

APPLICATIONS

- Cordless Phones
- Radio control systems
- Laptop, Palmtops and PDAs
- Single-lens reflex DSC
- PC peripherals with memory
- Wireless Communication Equipments
- Portable Audio Video Equipments
- Car Navigation Systems
- LAN Cards
- Ultra Low Power Microcontrollers

TYPICAL APPLICATION CIRCUIT

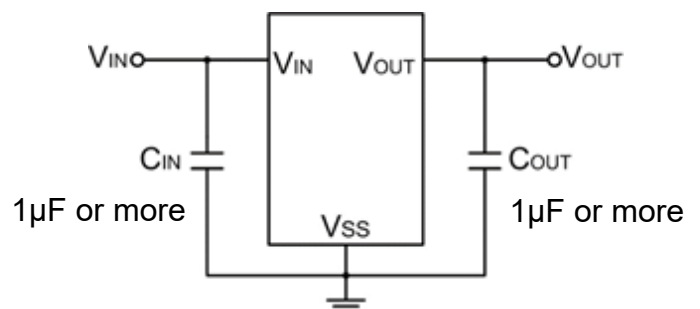

Electrical Characteristics

ABSOLUTE MAXIMUM RATINGS

(Unless otherwise specified, $T_A=25^{\circ}\text{C}$)

PARAMETER	SYMBOL	RATINGS	UNITS
Input Voltage ⁽²⁾	V_{IN}	-0.3~40	V
Output Voltage ⁽²⁾	V_{OUT}	-0.3~13	V
Power Dissipation	P_D	0.6	W
Operating Ambient Temperature Range	T_A	-40~+85	$^{\circ}\text{C}$
Operating Junction Temperature Range ⁽³⁾	T_j	-40~+125	$^{\circ}\text{C}$
Storage Temperature	T_{stg}	-40~+125	$^{\circ}\text{C}$
Lead Temperature(Soldering, 10 sec)	T_{solder}	260	$^{\circ}\text{C}$
ESD rating	Human Body Model -(HBM)	2	kV
	Machine Model- (MM)	200	V

(1) Stresses beyond those listed under *absolute maximum ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *recommended operating conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

(2) All voltages are with respect to network ground terminal.

(3) This IC includes over temperature protection that is intended to protect the device during momentary overload. Junction temperature will exceed 125°C when over temperature protection is active. Continuous operation above the specified maximum operating junction temperature may impair device reliability.

RECOMMENDED OPERATING CONDITIONS

PARAMETER	MIN.	NOM.	MAX.	UNITS
Supply voltage at V_{IN}	2.5		36	V
Operating junction temperature range, T_j	-40		125	$^{\circ}\text{C}$
Operating free air temperature range, T_A	-40		85	$^{\circ}\text{C}$

Electrical Characteristics

ELECTRICAL CHARACTERISTICS

(Unless otherwise specified, TA=25°C)

PARAMETER	SYMBOL	CONDITIONS		MIN.	TYP. ⁽⁴⁾	MAX.	UNITS
Input Voltage	V _{IN}			2.5	—	36	V
Output Voltage Range	V _{OUT}			2.1	—	12	V
DC Output Accuracy		I _{OUT} =1mA		-1	—	1	%
Dropout Voltage	V _{dif} ⁽⁵⁾	I _{OUT} =100mA,V _{OUT} =3.3V		—	200	—	mV
Supply Current	I _{SS}	I _{OUT} =0A	1.2≤V _{OUT} ≤7.0V	—	2	5	μA
			7.0<V _{OUT} ≤12V	—	3	6	μA
Line Regulation	$\frac{\Delta V_{OUT}}{V_{OUT} \times \Delta V_{IN}}$	I _{OUT} =10mA V _{OUT} +1V≤V _{IN} ≤36V		—	0.01	0.3	%/V
Load Regulation	ΔV _{OUT}	V _{IN} = V _{OUT} +1V, 1mA≤I _{OUT} ≤100mA		—	10	—	mV
Temperature Coefficient	$\frac{\Delta V_{OUT}}{V_{OUT} \times \Delta T_A}$	I _{OUT} =10mA, -40°C<T _J <125°C			50		ppm
Output Current Limit	I _{LIM}	V _{OUT} = 0.5 x V _{OUT(Normal)} , Vin=5.0V		350	600		mA
Short Current	I _{SHORT}	V _{OUT} =V _{SS}		—	100	—	mA
Power Supply Rejection Ratio	PSRR	I _{OUT} =50mA	100Hz		75		dB
			1kHz	—	70	—	
			10kHz	—	55	—	
			100kHz	—	40	—	
Output Noise Voltage	V _{ON}	BW=10Hz to 100kHz		—	27 x V _{OUT}	—	μV _{RMS}
Thermal Shutdown Temperature	T _{SD}	—		—	160	—	°C
Thermal Shutdown Hysteresis	ΔT _{SD}	—		—	20	—	°C

(4) Typical numbers are at 25°C and represent the most likely norm.

(5)V_{dif}: The Difference Of Output Voltage And Input Voltage When Input Voltage Is Decreased Gradually Till Output Voltage Equals To 98% Of V_{OUT} (E).


MODEL DEFINITION INFORMATION

Model	Output Voltage
CJ7533S	3.3V
CJ7550S	5.0V
CJ75C0S	12.0V


Typical Characteristics

(Unless otherwise specified, $T_A=25^\circ\text{C}$)


I_{OUT} vs. V_{drop}

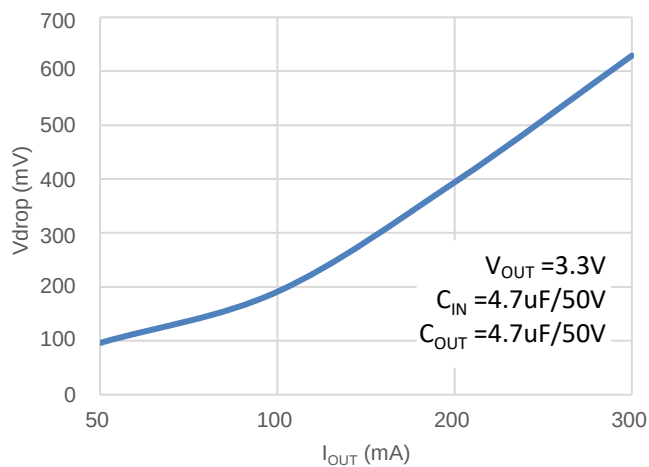


I_{OUT} vs. V_{drop}

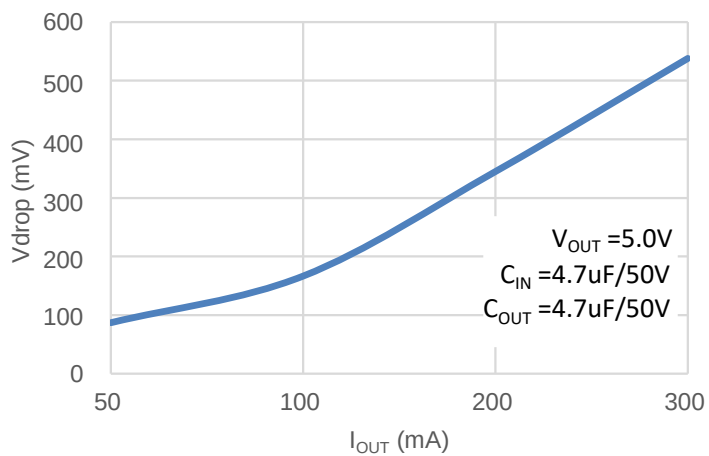


V_{in} vs I_q

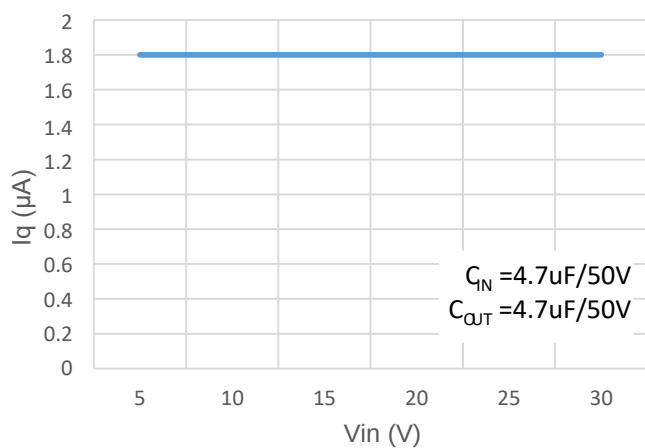

Output Voltage vs Temperature

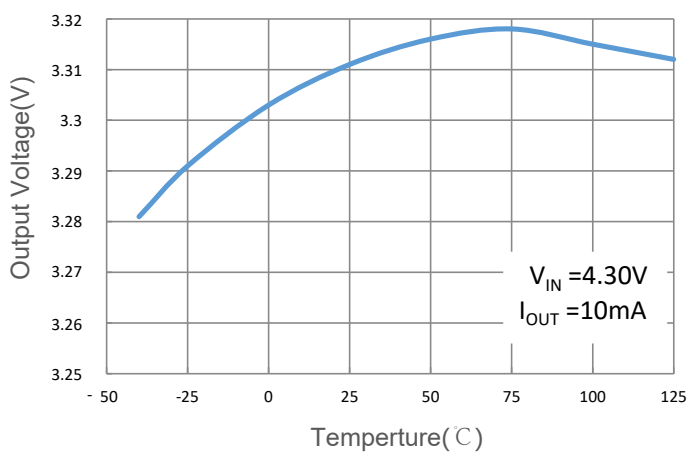


PSRR vs Frequency

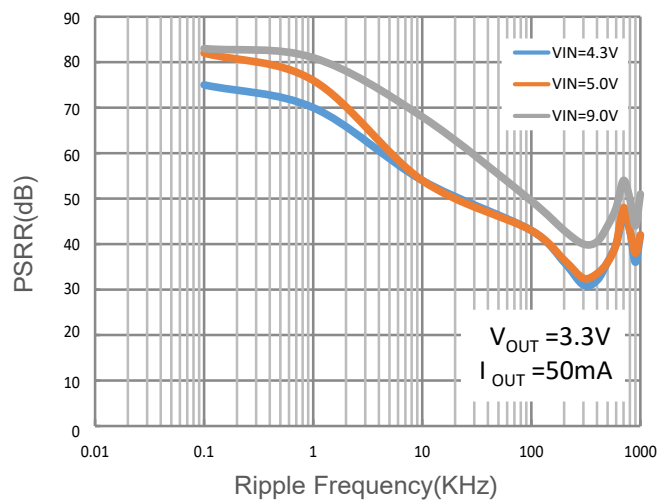


Typical Characteristics

(Unless otherwise specified, $T_A=25^{\circ}\text{C}$)


Power Up Response

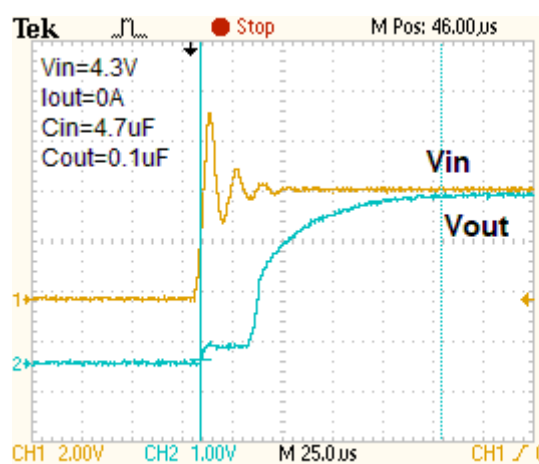


Power Up Response

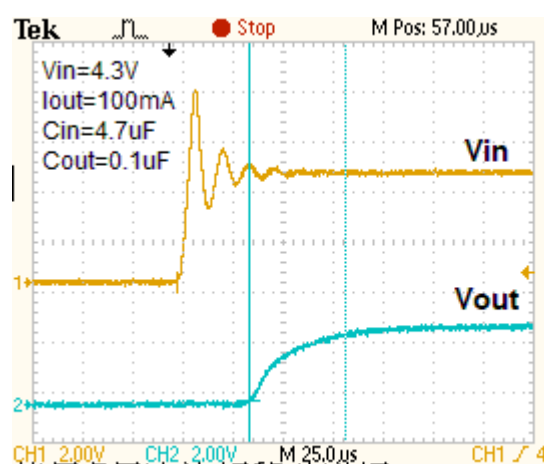


Load Transient Response

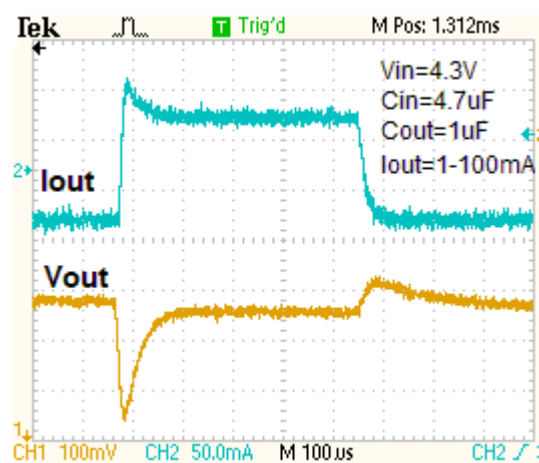

Load Transient Response

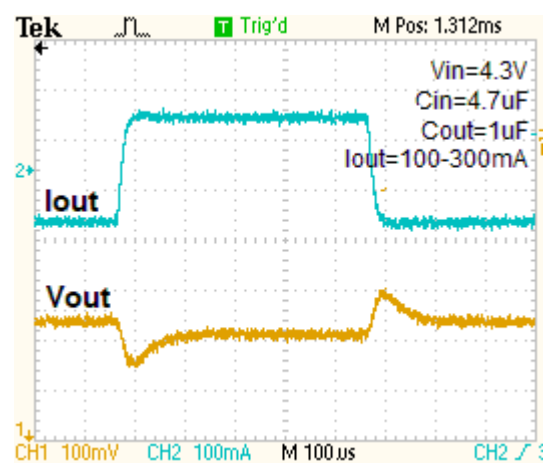


SOT-89-3L Package Outline Dimensions

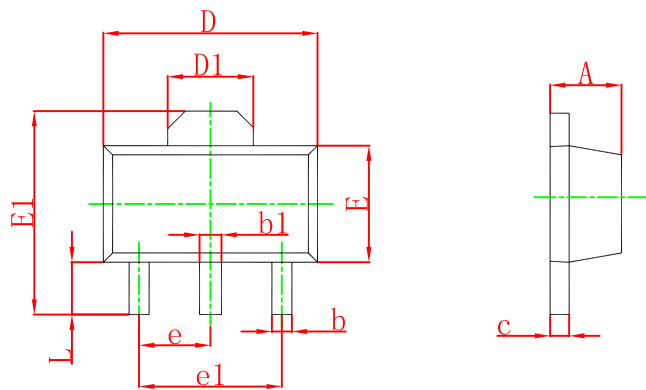

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.197
b1	0.400	0.580	0.016	0.023
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.550 REF		0.061 REF	
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
e	1.500 TYP		0.060 TYP	
e1	3.000 TYP		0.118 TYP	
L	0.900	1.200	0.035	0.047

SOT-89-3L Suggested Pad Layout

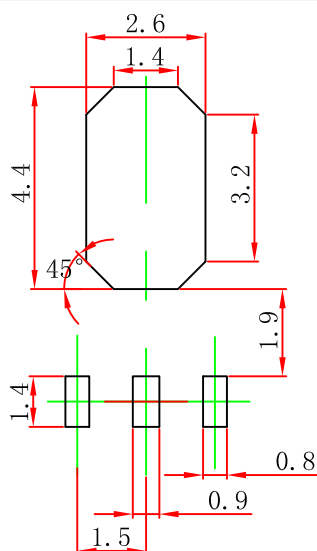

Note:

1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.

NOTICE

JSCJ reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. JSCJ does not assume any liability arising out of the application or use of any product described herein.