


SOT-23-3L Plastic-Encapsulate MOSFETS

CJK2333 P-channel MOSFET

$V_{(BR)DSS}$	$R_{DS(on)MAX}$	I_D
-12V	28mΩ@-4.5V	-6A
	32mΩ@-3.7V	
	40mΩ@-2.5V	
	63mΩ@-1.8V	
	150mΩ@-1.5V	

SOT-23-3L

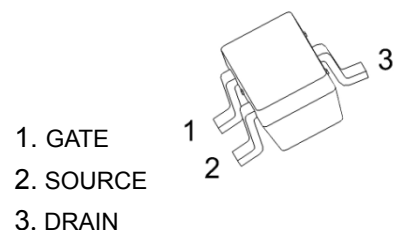

FEATURE

- TrenchFET Power MOSFET
- Excellent $R_{DS(on)}$ and Low Gate Charge


APPLICATION

- DC/DC Converter
- Load Switch for Portable Devices
- Battery Switch

MARKING



Equivalent Circuit



Solid dot = Green molding compound device,
if none, the normal device.

ABSOLUTE MAXIMUM RATINGS ($T_a=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	-12	V
Gate-Source Voltage	V_{GS}	±8	V
Continuous Drain Current	I_D	-6	A
Pulsed Drain Current ($t=300\mu\text{s}$)	I_{DM}	-20	A
Power Dissipation	P_D	0.4	W
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	312.5	$^{\circ}\text{C/W}$
Junction Temperature	T_J	150	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	-55~ +150	$^{\circ}\text{C}$

MOSFET ELECTRICAL CHARACTERISTICS


$T_a=25^{\circ}\text{C}$ unless otherwise specified

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Static Characteristics						
Drain-source breakdown voltage	V _{(BR)DSS}	V _{GS} = 0V, I _D =-250μA	-12			V
Zero gate voltage drain current	I _{DSS}	V _{DS} =-12V,V _{GS} = 0V			-1	μA
Gate-body leakage current	I _{GSS}	V _{GS} =±8V, V _{DS} = 0V			±0.1	μA
Gate threshold voltage (note 1)	V _{GS(th)}	V _{DS} =V _{GS} , I _D =-250μA	-0.4		-1	V
Drain-source on-resistance (note 1)	R _{DS(on)}	V _{GS} =-4.5V, I _D =-5A			28	mΩ
		V _{GS} =-3.7V, I _D =-4.6A			32	
		V _{GS} =-2.5V, I _D =-4.3A			40	
		V _{GS} =-1.8V, I _D =-1A			63	
		V _{GS} =-1.5V, I _D =-0.5A			150	
Forward tranconductance (note 1)	g _{FS}	V _{DS} =-5V, I _D =-5A		18		S
Dynamic characteristics (note 2)						
Input Capacitance	C _{iSS}	V _{DS} =-6V,V _{GS} =0V,f =1MHz		1275		pF
Output Capacitance	C _{oSS}			255		pF
Reverse Transfer Capacitance	C _{rSS}			236		pF
Gate resistance	R _g	f =1MHz	1.9		19	Ω
Total Gate Charge	Q _g	V _{DS} =-6V,V _{GS} =-4.5V,I _D =-5A		14	21	nC
Gate-Source Charge	Q _{gs}			2.3		nC
Gate-Drain Charge	Q _{gd}			3.6		nC
Turn-on delay time	t _{d(on)}	V _{DD} =-6V,V _{GEN} =-4.5V,I _D =-4A R _L =6Ω,R _{GEN} =1Ω		26	40	ns
Turn-on rise time	t _r			24	40	ns
Turn-off delay time	t _{d(off)}			45	70	ns
Turn-off fall time	t _f			20	35	ns
Source-Drain Diode characteristics						
Diode forward current	I _S	T _C =25°C			-1.4	A
Diode pulsed forward current	I _{SM}				-20	A
Diode Forward voltage (note 1)	V _{DS}	V _{GS} =0V, I _S =-4A			-1.2	V
Diode reverse recovery time (note 2)	t _{rr}	I _F =-4A,dI/dt=100A/μs		24	48	ns
Diode reverse recovery charge (note 2)	Q _{rr}			8	16	nC





Notes : 1. Pulse test; pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$.
2. Guaranteed by design, not subject to production testing.

Typical Characteristics


Output Characteristics

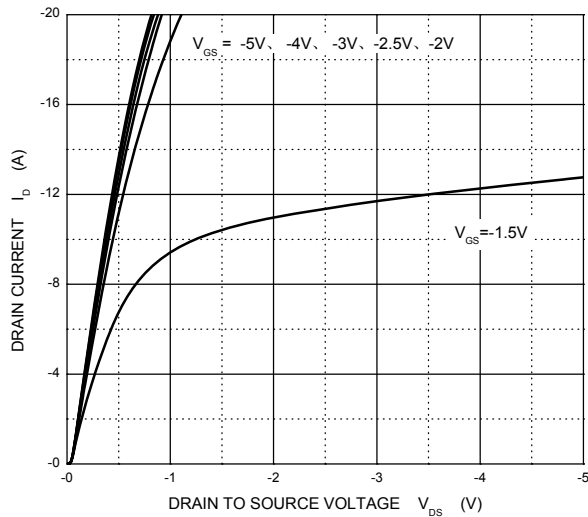



Transfer Characteristics

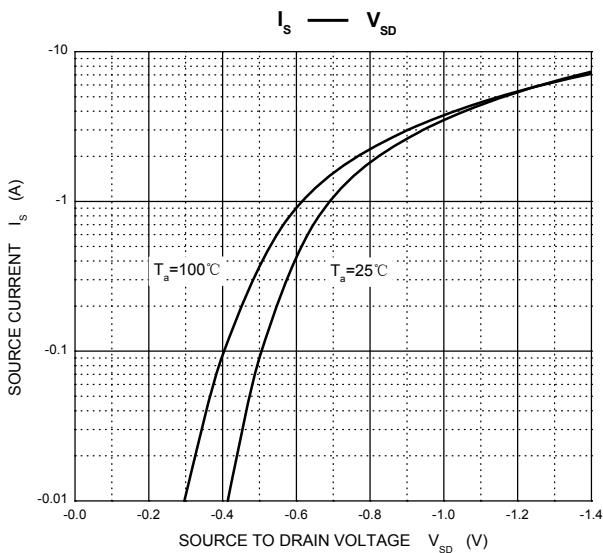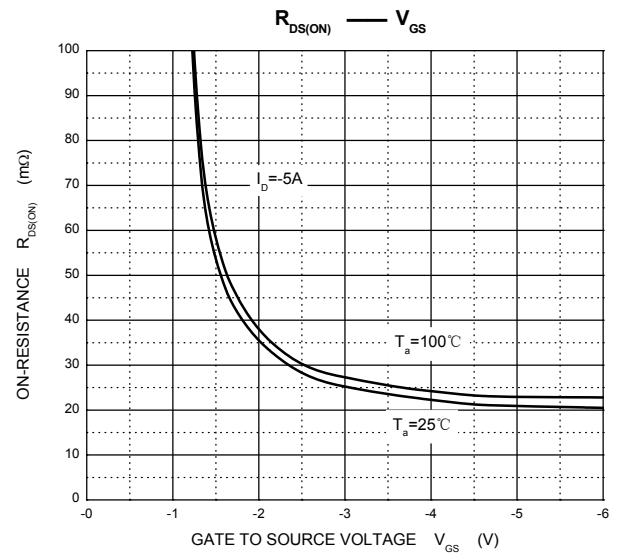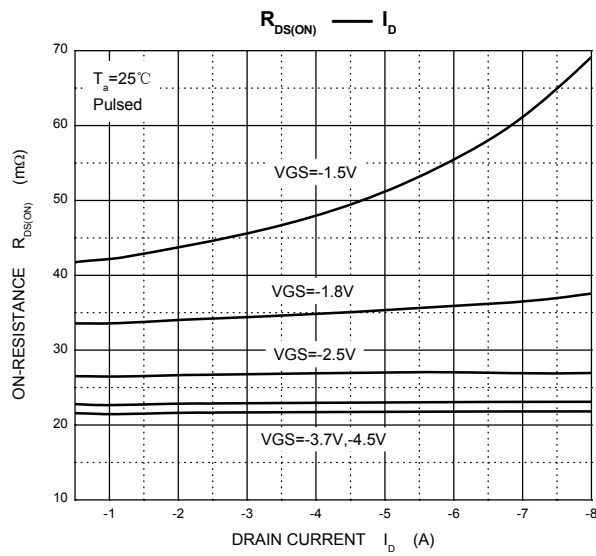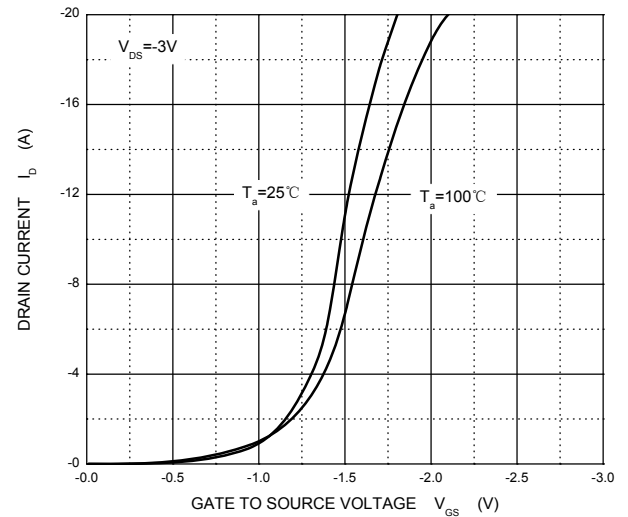

Threshold Voltage

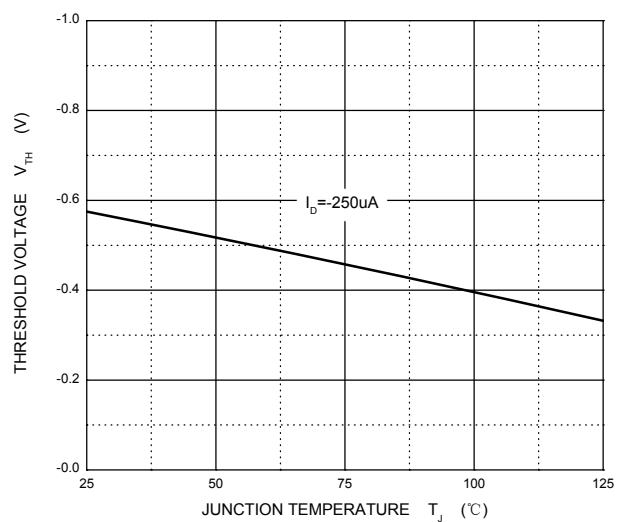


SOT-23-3L Package Outline Dimensions

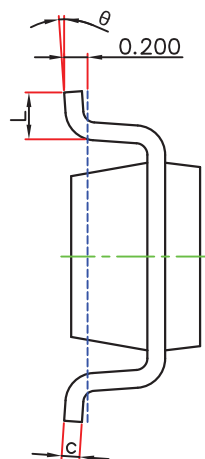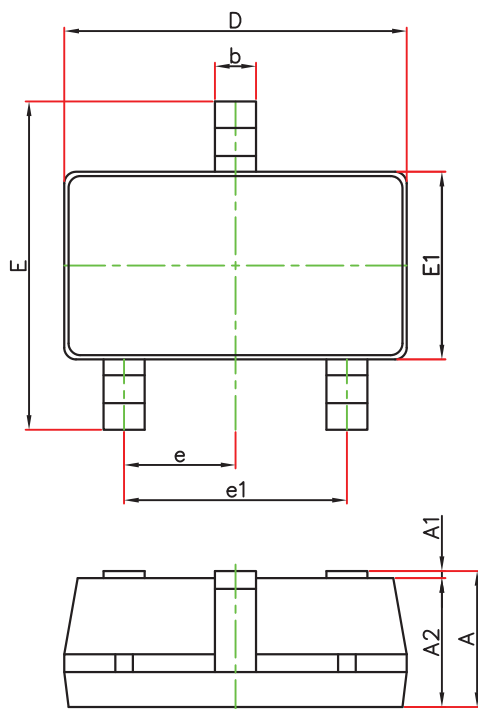

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E1	1.500	1.700	0.059	0.067
E	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

SOT-23-3L Suggested Pad Layout

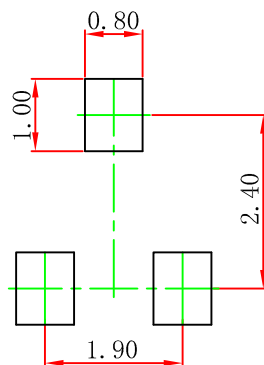


Note:
1. Controlling dimension: in millimeters.
2. General tolerance: ± 0.05 mm.
3. The pad layout is for reference purposes only.

NOTICE

JCET reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. JCET does not assume any liability arising out of the application or use of any product described herein.

SOT-23-3L Tape and Reel

SOT-23-3L Embossed Carrier Tape

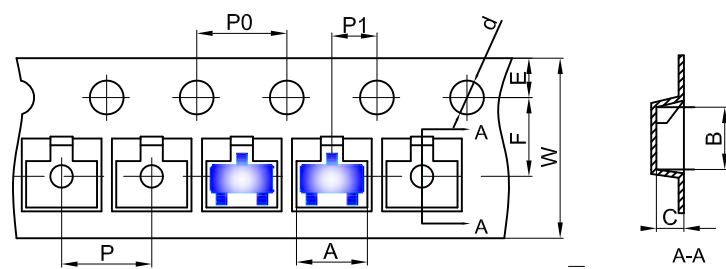


Packaging Description:


SOT-23-3L parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3,000 units per 7" or 18.0cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
SOT-23-3L	3.18	3.28	1.32	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00

SOT-23-3L Tape Leader and Trailer

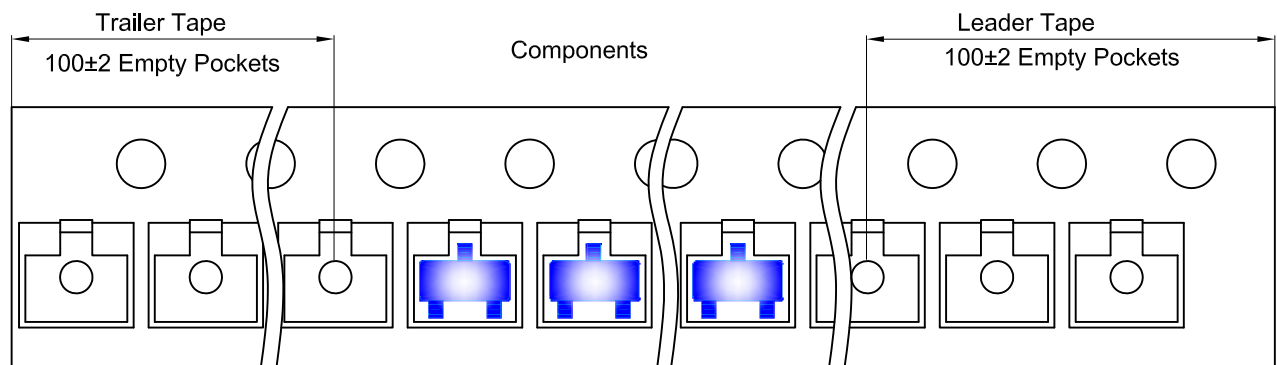

SOT-23-3L Reel

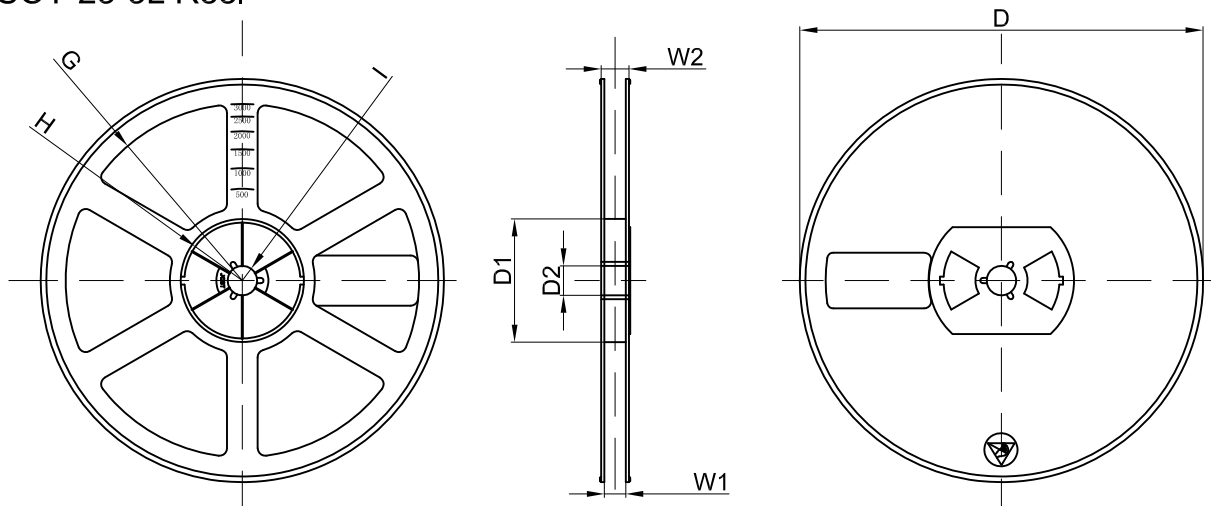

Dimensions are in millimeter								
Reel Option	D	D1	D2	G	H	I	W1	W2
7"Dia	Ø180.00	60.00	13.00	R78.00	R25.60	R6.50	9.50	13.10

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
3000 pcs	7 inch	30,000 pcs	203×203×195	120,000 pcs	438×438×220	