

TO-220F Plastic-Encapsulate MOSFETS

CJPF06N70

N-Channel Power MOSFET


$V_{(BR)DSS}$	$R_{DS(on)MAX}$	I_D
700V	$1.8\Omega@10V$	6A

GENERAL DESCRIPTION

This is a high voltage power MOSFET and is designed to have better characteristics, such as fast switching time, low gate charge, low on-state resistance and high rugged avalanche. This high speed switching power MOSFET is usually used in power supplies, PWM motor controls, high efficient DC to DC converters and bridge circuits.

TO-220F

1. GATE
2. DRAIN
3. SOURCE



FEATURE


- Low gate charge
- Low C_{rss}
- Fast switching
- 100% avalanche tested
- Improved dv/dt capability
- RoHS product

MARKING



CJPF06N70= Device code
Solid dot = Green molding compound device,
if none, the normal device
XXX=Date Code

EQUIVALENT CIRCUIT



Maximum ratings ($T_a=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	700	V
Gate-Source Voltage	V_{GS}	± 30	
Continuous Drain Current	I_D	6	A
Pulsed Drain Current	I_{DM}	24	
Single Pulsed Avalanche Energy (note1)	E_{AS}	270	mJ
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	62.5	$^\circ\text{C}/\text{W}$
Junction Temperature	T_J	150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 ~ +150	
Maximum Lead Temperature for Soldering Purposes , 1/8" from Case for 5 Seconds	T_L	260	

MOSFET ELECTRICAL CHARACTERISTICS







$T_a=25^{\circ}\text{C}$ unless otherwise specified

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Off characteristics						
Drain-source breakdown voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = 250\mu A$	700			V
Zero gate voltage drain current	I_{DSS}	$V_{DS} = 700V, V_{GS} = 0V$			25	μA
		$V_{DS} = 560V, V_{GS} = 0V, T_J = 125^{\circ}C$			250	μA
Gate-body leakage current (note2)	I_{GSS}	$V_{DS} = 0V, V_{GS} = \pm 30V$			± 100	nA
On characteristics						
Gate-threshold voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\mu A$	2	3.5	4	V
Static drain-source on-resistance	$R_{DS(on)}$	$V_{GS} = 10V, I_D = 3A$		1.6	1.8	Ω
Dynamic characteristics (note 3)						
Input capacitance	C_{iss}	$V_{DS} = 25V, V_{GS} = 0V, f = 1MHz$		840	1200	pF
Output capacitance	C_{oss}			75	115	
Reverse transfer capacitance	C_{rss}			12		
Switching characteristics (note 2,3)						
Total gate charge	Q_g	$V_{DS} = 560V, V_{GS} = 10V, I_D = 6A$		75	90	nC
Gate-source charge	Q_{gs}			18		
Gate-drain charge	Q_{gd}			17.5		
Turn-on delay time	$t_{d(on)}$	$V_{DD} = 350V, R_G = 11.5V, I_D = 6A$		45	75	ns
Turn-on rise time	t_r			50	80	
Turn-off delay time	$t_{d(off)}$			180	220	
Turn-off fall time	t_f			55	90	
Source-drain diode characteristics						
Maximum diode forward continuous current	I_S				6	A
Maximum diode forward pulse current	I_{SM}				24	A
Diode forward voltage	V_{SD}	$I_S = 6A, V_{GS} = 0V$			1.4	V


Notes :

1. $L = 10\text{mH}, V_{DD} = 50V, V_{GS} = 10V, R_G = 25\Omega$, Starting $T_J = 25^{\circ}\text{C}$.
2. Pulse Test : Pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$.
3. These parameters have no way to verify.

Typical Characteristics

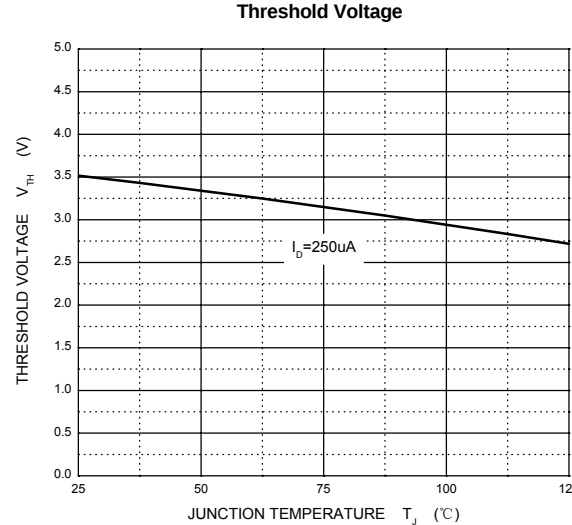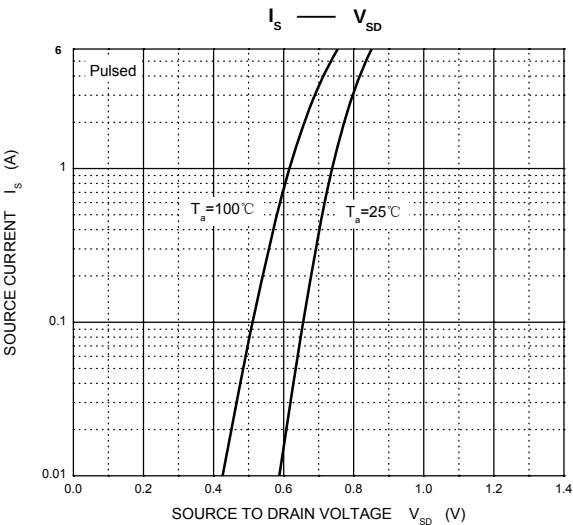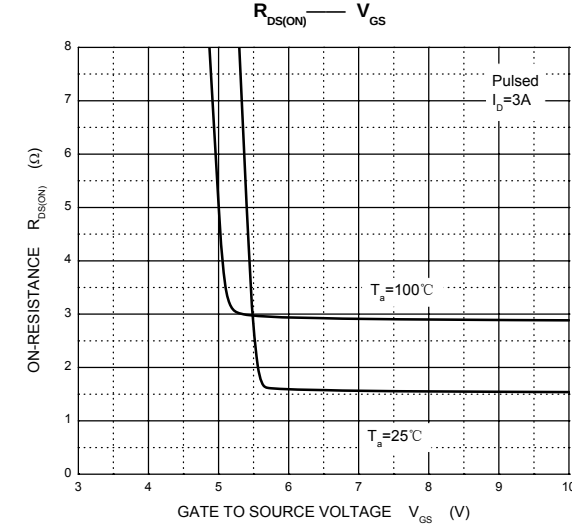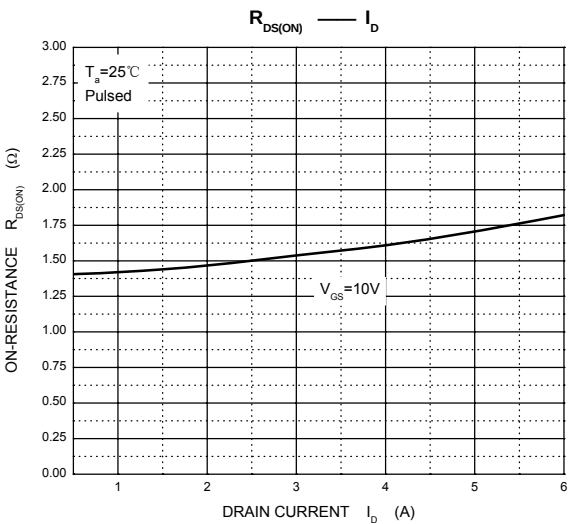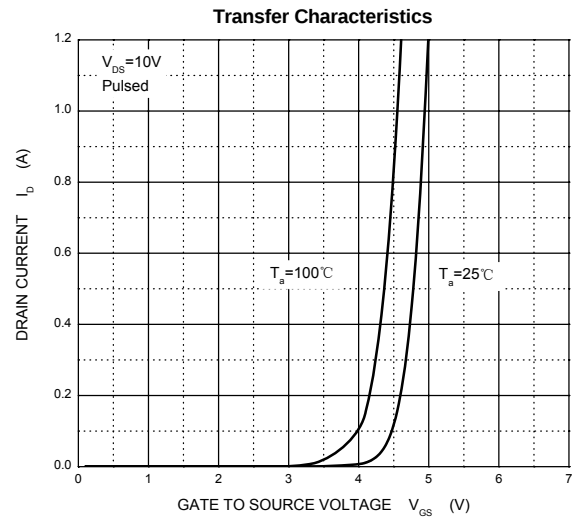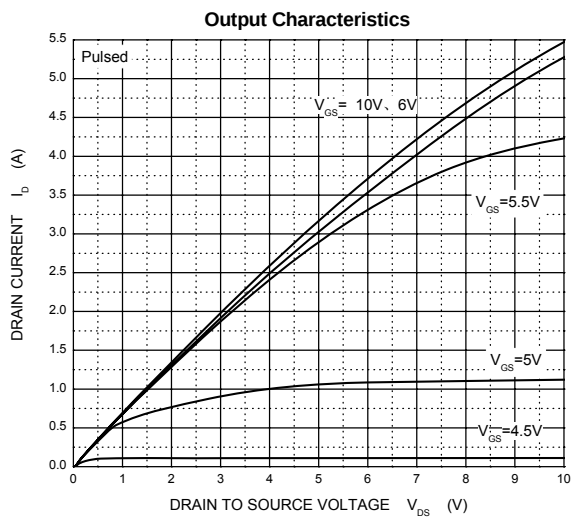

TO-220F Package Outline Dimensions

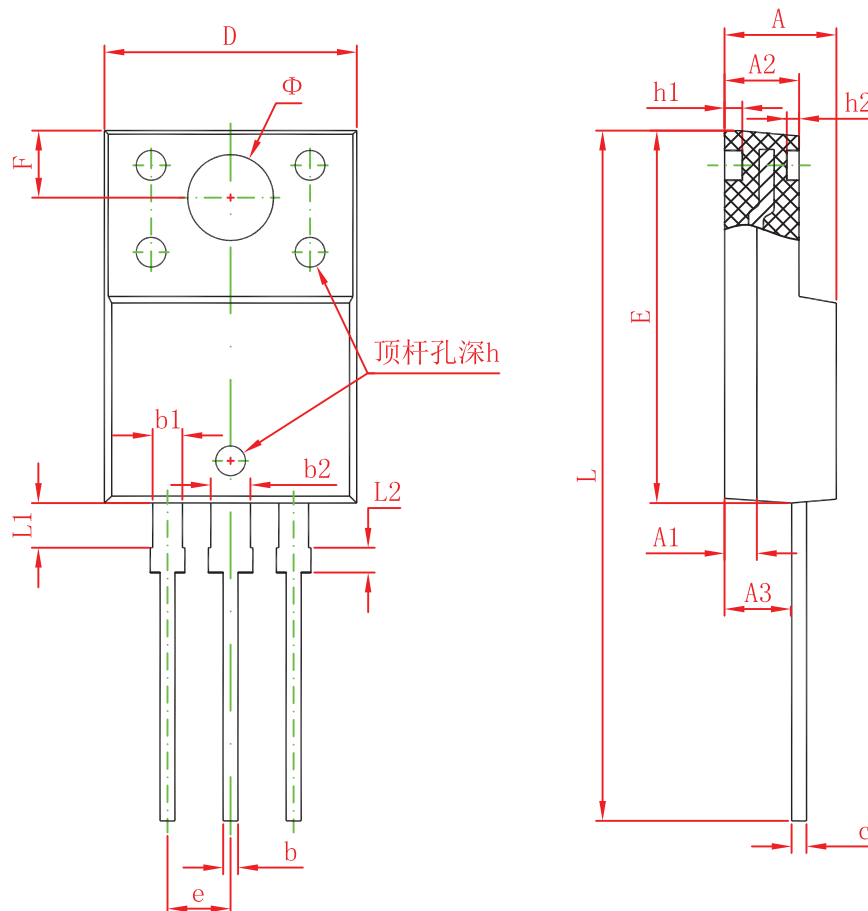

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	4.300	4.700	0.169	0.185
A1	1.300 REF.		0.051 REF.	
A2	2.800	3.200	0.110	0.126
A3	2.500	2.900	0.098	0.114
b	0.500	0.750	0.020	0.030
b1	1.100	1.350	0.043	0.053
b2	1.500	1.750	0.059	0.069
c	0.500	0.750	0.020	0.030
D	9.960	10.360	0.392	0.408
E	14.800	15.200	0.583	0.598
e	2.540 TYP.		0.100 TYP.	
F	2.700 REF.		0.106 REF.	
Φ	3.500 REF.		0.138 REF.	
h	0.000	0.300	0.000	0.012
h1	0.800 REF.		0.031 REF.	
h2	0.500 REF.		0.020 REF.	
L	28.000	28.400	1.102	1.118
L1	1.700	1.900	0.067	0.075
L2	0.900	1.100	0.035	0.043