


型名: CKD32

## 1. 尺寸(毫米)

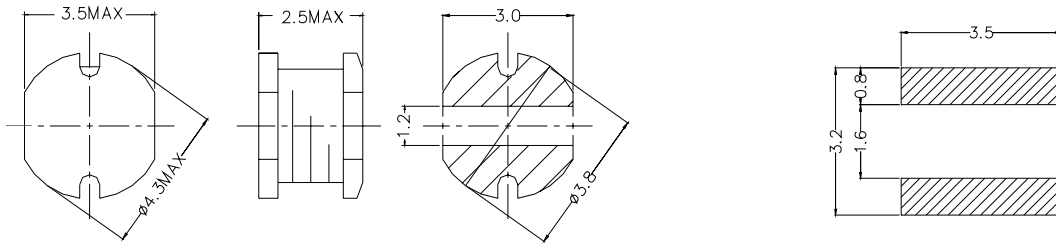

## 2. 技术参数

NO.	品名	电感( $\mu$ H)	电阻 (m $\Omega$ ) (MAX)	额定电流 (A)
1	CKD32-1R0	1.0	72	2.06
2	CKD32-2R2	2.2	130	1.39
3	CKD32-3R3	3.3	200	1.25
4	CKD32-3R9	3.9	210	1.20
5	CKD32-4R7	4.7	330	1.00
6	CKD32-5R6	5.6	350	0.91
7	CKD32-6R8	6.8	430	0.85
8	CKD32-100	10	650	0.74
9	CKD32-120	12	820	0.64
10	CKD32-150	15	900	0.60
11	CKD32-180	18	1140	0.52
12	CKD32-220	22	1390	0.50
13	CKD32-270	27	1550	0.43
14	CKD32-330	33	2150	0.37
15	CKD32-390	39	2440	0.36
16	CKD32-470	47	2680	0.31
17	CKD32-560	56	3050	0.30
18	CKD32-680	68	3480	0.28
19	CKD32-820	82	3840	0.25
20	CKD32-101	100	5760	0.20
21	CKD32-121	120	6620	0.19
22	CKD32-151	150	7360	0.17
23	CKD32-181	180	8380	0.16
24	CKD32-221	220	13700	0.14

无铅

测定频率 100kHz

电感公差范围 ( $\pm 30\%$ )

额定电流: 指电感值减小到原值 65%时的电流