


型名: CKD75

1. 尺寸(毫米)

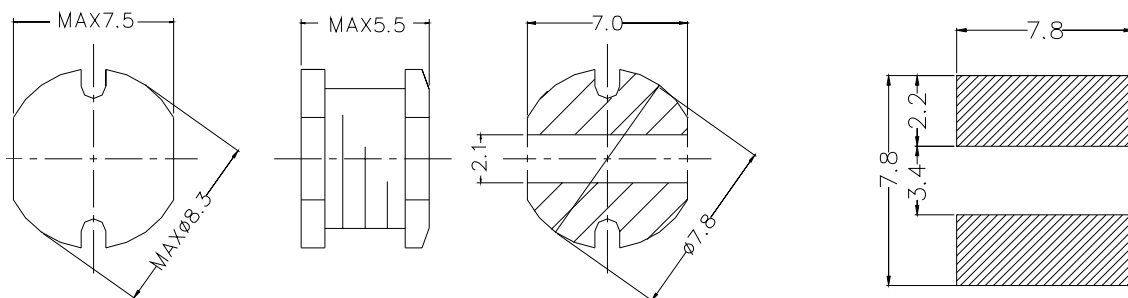

2. 技术参数

NO.	品 名	电感(μ H)	电阻 (m Ω) (MAX)	额定电流 (A)
1	CKD75-100	10	72	2.28
2	CKD75-120	12	80	2.00
3	CKD75-150	15	92	1.78
4	CKD75-180	18	100	1.60
5	CKD75-220	22	110	1.50
6	CKD75-270	27	122	1.28
7	CKD75-330	33	130	1.20
8	CKD75-390	39	160	1.10
9	CKD75-470	47	180	1.08
10	CKD75-560	56	242	0.92
11	CKD75-680	68	280	0.85
12	CKD75-820	82	370	0.78
13	CKD75-101	100	430	0.70
14	CKD75-121	120	470	0.66
15	CKD75-151	150	640	0.56
16	CKD75-181	180	710	0.51
17	CKD75-221	220	960	0.48
18	CKD75-271	270	1110	0.41
19	CKD75-331	330	1260	0.40
20	CKD75-391	390	1770	0.36
21	CKD75-471	470	1960	0.32

无铅

测定频率 100kHz

电感公差范围 ($\pm 30\%$)

额定电流: 指电感值减小到原值 65%时的电流