


型名: CKH3218

1. 尺寸(毫米)

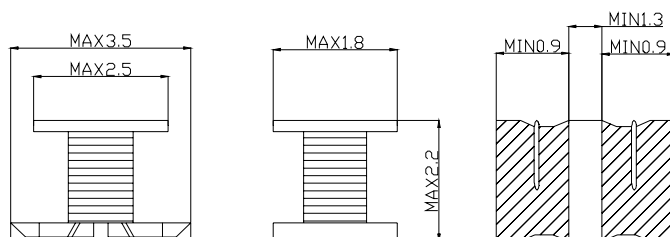

2. 技术参数

NO.	品名	电感(μ H)	电阻 (m Ω) (MAX)	额定电流 (A)
1	CKH3218-1R0	1.0	490	0.170
2	CKH3218-1R2	1.2	500	0.163
3	CKH3218-1R5	1.5	520	0.153
4	CKH3218-1R8	1.8	530	0.13
5	CKH3218-2R2	2.2	540	0.14
6	CKH3218-2R7	2.7	550	0.132
7	CKH3218-3R3	3.3	610	0.13
8	CKH3218-3R9	3.9	1500	0.123
9	CKH3218-4R7	4.7	1700	0.12
10	CKH3218-5R6	5.6	1800	0.113
11	CKH3218-6R8	6.8	2000	0.11
12	CKH3218-8R2	8.2	2200	0.103
13	CKH3218-100	10	2500	0.10
14	CKH3218-120	12	2700	0.093
15	CKH3218-150	15	2900	0.09
16	CKH3218-180	18	3000	0.083
17	CKH3218-220	22	3100	0.083
18	CKH3218-270	27	3400	0.083
19	CKH3218-330	33	3800	0.08
20	CKH3218-390	39	4500	0.083
21	CKH3218-470	47	6300	0.083
22	CKH3218-560	56	7100	0.05
23	CKH3218-680	68	7900	0.05
24	CKH3218-820	82	8700	0.043
25	CKH3218-101	100	11570	0.043
26	CKH3218-111	110	13000	0.025
27	CKH3218-151	150	15030	0.015
28	CKH3218-181	180	16600	0.013
29	CKH3218-221	220	26460	0.012
30	CKH3218-271	270	29700	0.011
31	CKH3218-331	330	43060	0.01
32	CKH3218-471	470	53500	0.006
33	CKH3218-821	820	66100	0.003

无铅

测定频率 100kHz

电感公差范围 ($\pm 30\%$)

额定电流: 指电感值减小到原值 65%时的电流