


型名:CKH4526

1. 尺寸(毫米)

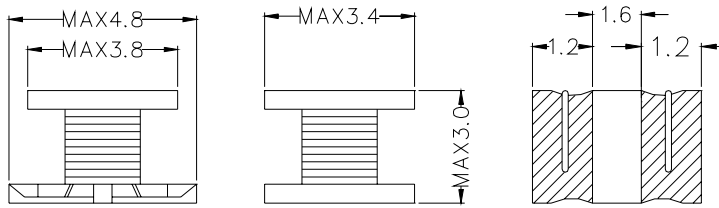

2. 技术参数

NO.	品名	电感(μ H)	电阻 ($m\Omega$) (MAX)	额定电流 (A)
1	CKH4526-1R0	1.0	200	0.50
2	CKH4526-1R2	1.2	200	0.50
3	CKH4526-1R5	1.5	300	0.50
4	CKH4526-1R8	1.8	300	0.50
5	CKH4526-2R2	2.2	300	0.50
6	CKH4526-2R7	2.7	320	0.50
7	CKH4526-3R3	3.3	350	0.50
8	CKH4526-3R9	3.9	380	0.50
9	CKH4526-4R7	4.7	400	0.50
10	CKH4526-5R6	5.6	470	0.50
11	CKH4526-6R8	6.8	500	0.45
12	CKH4526-8R2	8.2	560	0.45
13	CKH4526-100	10	560	0.40
14	CKH4526-120	12	620	0.38
15	CKH4526-150	15	730	0.36
16	CKH4526-180	18	820	0.34
17	CKH4526-220	22	940	0.32
18	CKH4526-270	27	1100	0.30
19	CKH4526-330	33	1200	0.26
20	CKH4526-390	39	1400	0.24
21	CKH4526-470	47	1500	0.22
22	CKH4526-560	56	1700	0.20
23	CKH4526-680	68	1900	0.18
24	CKH4526-820	82	2200	0.17
25	CKH4526-101	100	2500	0.16
26	CKH4526-121	120	3000	0.15
27	CKH4526-151	150	3700	0.13
28	CKH4526-181	180	4500	0.12
29	CKH4526-221	220	5400	0.11
30	CKH4526-271	270	6800	0.10
31	CKH4526-331	330	8200	0.092
32	CKH4526-391	390	9700	0.090
33	CKH4526-471	470	11800	0.078

无铅
测定频率 100kHz
电感公差范围 ($\pm 30\%$)
额定电流: 指电感值减小到原值 65%时的电流