


型名: CKH5747

## 1. 尺寸(毫米)

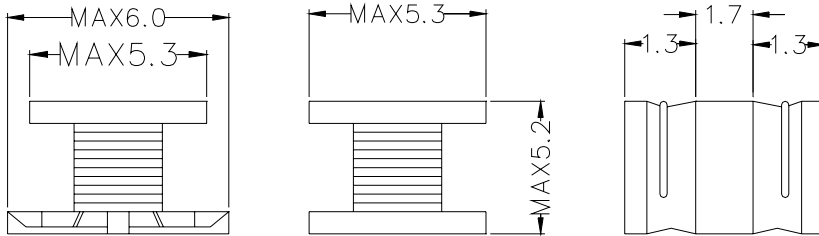

## 2. 技术参数

| NO. | 品名          | 电感( $\mu$ H) | 电阻 ( $m\Omega$ ) (MAX) | 额定电流 (A) |
|-----|-------------|--------------|------------------------|----------|
| 1   | CKH5747-1R0 | 1.0          | 27                     | 4.0      |
| 2   | CKH5747-1R5 | 1.5          | 32                     | 3.6      |
| 3   | CKH5747-2R2 | 2.2          | 41                     | 3.2      |
| 4   | CKH5747-3R3 | 3.3          | 50                     | 2.9      |
| 5   | CKH5747-4R7 | 4.7          | 58                     | 2.6      |
| 6   | CKH5747-6R8 | 6.8          | 100                    | 2.0      |
| 7   | CKH5747-100 | 10           | 130                    | 1.7      |
| 8   | CKH5747-150 | 15           | 212                    | 1.2      |
| 9   | CKH5747-220 | 22           | 270                    | 1.2      |
| 10  | CKH5747-330 | 33           | 450                    | 0.9      |
| 11  | CKH5747-470 | 47           | 560                    | 0.8      |
| 12  | CKH5747-680 | 68           | 940                    | 0.62     |
| 13  | CKH5747-101 | 100          | 1200                   | 0.56     |
| 14  | CKH5747-151 | 150          | 2660                   | 0.40     |
| 15  | CKH5747-221 | 220          | 3360                   | 0.32     |
| 16  | CKH5747-331 | 330          | 6160                   | 0.25     |
| 17  | CKH5747-471 | 470          | 7560                   | 0.24     |
| 18  | CKH5747-681 | 680          | 11300                  | 0.17     |

无铅

测定频率 100kHz

电感公差范围 ( $\pm 30\%$ )

额定电流: 指电感值减小到原值 65%时的电流