


型名: CKRH105R

1. 尺寸(毫米)

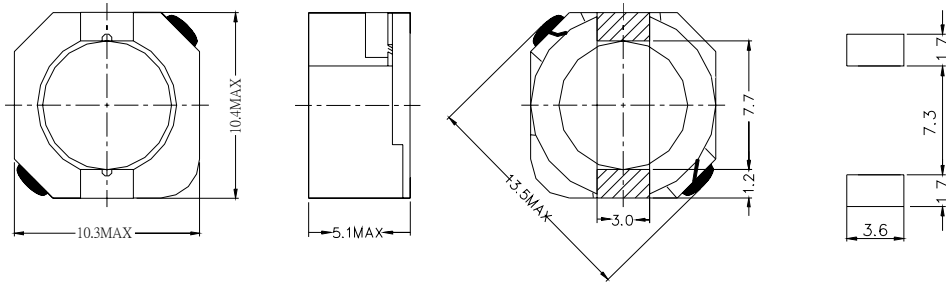

2. 技术参数

NO.	品名	电感(μ H)	电阻 (m Ω) (MAX)	额定电流 (A)
1	CKRH105R-0R8	0.8	4	9.50
2	CKRH105R-1R5	1.5	5	8.30
3	CKRH105R-2R2	2.2	7	7.50
4	CKRH105R-3R3	3.3	10	6.48
5	CKRH105R-4R7	4.7	12	6.10
6	CKRH105R-6R8	6.8	18	5.38
7	CKRH105R-8R2	8.2	21	5.00
8	CKRH105R-100	10	25	4.48
9	CKRH105R-120	12	32	3.78
10	CKRH105R-150	15	42	3.38
11	CKRH105R-180	18	45	3.08
12	CKRH105R-220	22	62	2.88
13	CKRH105R-270	27	70	2.58
14	CKRH105R-330	33	87	2.46
15	CKRH105R-390	39	107	2.23
16	CKRH105R-470	47	130	2.00
17	CKRH105R-560	56	152	1.86
18	CKRH105R-680	68	200	1.60
19	CKRH105R-820	82	230	1.40
20	CKRH105R-101	100	254	1.35
21	CKRH105R-121	120	307	1.14
22	CKRH105R-151	150	370	1.10
23	CKRH105R-181	180	420	1.00
24	CKRH105R-221	220	500	0.90
25	CKRH105R-271	270	674	0.80
26	CKRH105R-331	330	815	0.70
27	CKRH105R-391	390	953	0.68
28	CKRH105R-471	470	1290	0.54
29	CKRH105R-561	560	1430	0.51
30	CKRH105R-681	680	1598	0.50
31	CKRH105R-821	820	1770	0.46
32	CKRH105R-102	1000	1990	0.38

无铅

测定频率 100kHz

电感公差范围 ($\pm 30\%$)

额定电流: 指电感值减小到原值 65%时的电流

