


型号: CKRH127

1. 尺寸(毫米)

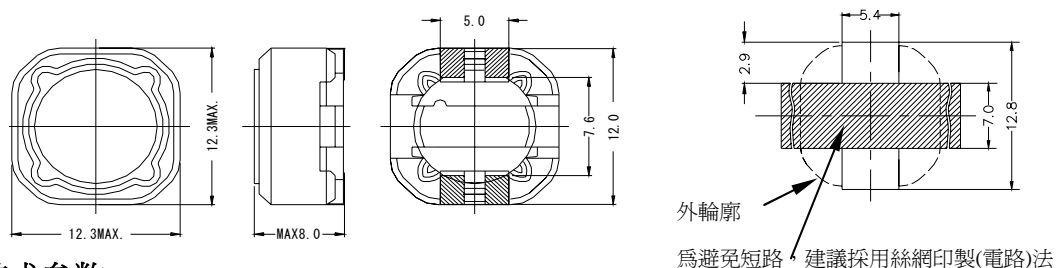

2. 技术参数

NO.	品名	电感(μ H)	电阻 ($M\Omega$) (MAX)	额定电流 (A)
1	CKRH127-1R2	1.2	7	9.78
2	CKRH127-2R4	2.4	11	8.0
3	CKRH127-3R5	3.5	13	7.5
4	CKRH127-4R7	4.7	15	6.8
5	CKRH127-6R1	6.1	18	6.6
6	CKRH127-7R6	7.6	20	5.8
7	CKRH127-100	10	21	5.4
8	CKRH127-120	12	24	4.9
9	CKRH127-150	15	29	4.5
10	CKRH127-180	18	39	3.9
11	CKRH127-220	22	43	3.5
12	CKRH127-270	27	45	3.4
13	CKRH127-330	33	64	3.0
14	CKRH127-390	39	72	2.75
15	CKRH127-470	47	100	2.50
16	CKRH127-560	56	110	2.35
17	CKRH127-680	68	140	2.10
18	CKRH127-820	82	160	1.95
19	CKRH127-101	100	220	1.68
20	CKRH127-121	120	250	1.60
21	CKRH127-151	150	280	1.42
22	CKRH127-181	180	350	1.28
23	CKRH127-221	220	390	1.14
24	CKRH127-271	270	560	1.06
25	CKRH127-331	330	640	0.95
26	CKRH127-391	390	700	0.88
27	CKRH127-471	470	980	0.77
28	CKRH127-561	560	1070	0.73
29	CKRH127-681	680	1460	0.67
30	CKRH127-821	820	1640	0.60
31	CKRH127-102	1000	1820	0.53

无铅

测定频率 100kHz

电感公差范围 ($\pm 30\%$)

额定电流: 指电感值减小到原值 65%时的电流

