


型名: CKRH4D22/HP

1. 尺寸(毫米)

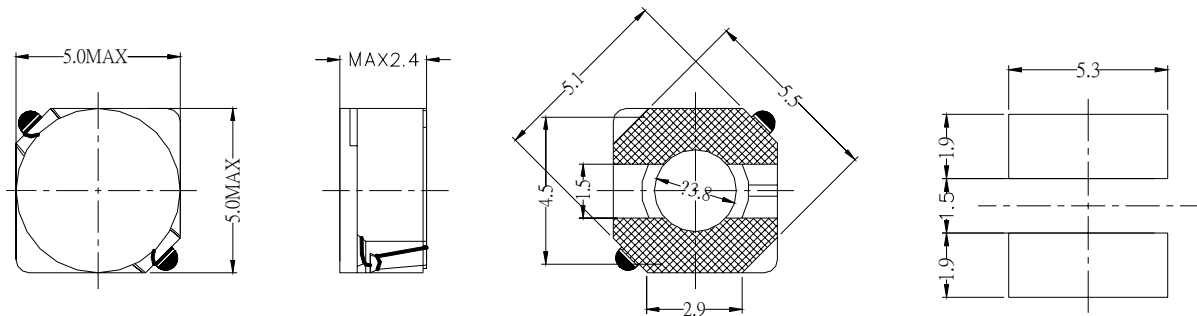

2. 技术参数

NO.	品 名	电感(μ H)	电阻 (m Ω) (MAX)	额定电流 (A)
1	CKRH4D22/HP-1R2	1.2	26	4.00
2	CKRH4D22/HP-1R5	1.5	32	3.78
3	CKRH4D22/HP-2R2	2.2	45	3.10
4	CKRH4D22/HP-2R7	2.7	59	2.88
5	CKRH4D22/HP-3R5	3.5	65	2.40
6	CKRH4D22/HP-4R7	4.7	82	2.10
7	CKRH4D22/HP-5R2	5.2	95	1.96
8	CKRH4D22/HP-6R3	6.3	110	1.82
9	CKRH4D22/HP-8R2	8.2	129	1.60
10	CKRH4D22/HP-100	10	144	1.48
11	CKRH4D22/HP-120	12	187	1.28
12	CKRH4D22/HP-150	15	215	1.16
13	CKRH4D22/HP-180	18	239	1.08
14	CKRH4D22/HP-220	22	269	1.00
15	CKRH4D22/HP-270	27	394	0.89
16	CKRH4D22/HP-330	33	451	0.76
17	CKRH4D22/HP-390	39	668	0.73
18	CKRH4D22/HP-470	47	723	0.68
19	CKRH4D22/HP-560	56	810	0.63
20	CKRH4D22/HP-680	68	915	0.56
21	CKRH4D22/HP-820	82	1221	0.53
22	CKRH4D22/HP-101	100	1372	0.45

无铅

测定频率 100kHz

电感公差范围 ($\pm 30\%$)

额定电流: 指电感值减小到原值 65%时的电流.

