


型名: CKRH4D28

1. 尺寸(毫米)

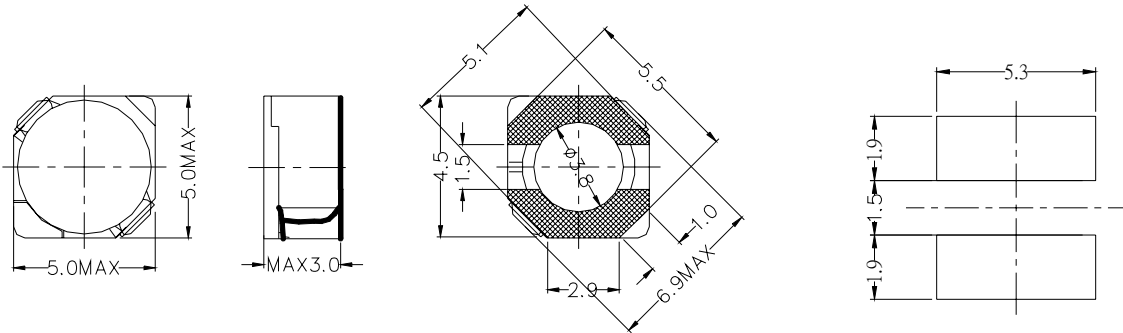

2. 技术参数

NO.	品名	电感(μ H)	电阻 (m Ω) (MAX)	额定电流 (A)
1	CKRH4D28-1R2	1.2	25	2.52
2	CKRH4D28-1R8	1.8	27	2.18
3	CKRH4D28-2R2	2.2	31	2.02
4	CKRH4D28-2R7	2.7	43	1.58
5	CKRH4D28-3R3	3.3	49	1.56
6	CKRH4D28-3R9	3.9	66	1.40
7	CKRH4D28-4R7	4.7	72	1.30
8	CKRH4D28-5R6	5.6	100	1.15
9	CKRH4D28-6R8	6.8	110	1.08
10	CKRH4D28-8R2	8.2	117	1.02
11	CKRH4D28-100	10	128	1.00
12	CKRH4D28-120	12	131	0.82
13	CKRH4D28-150	15	149	0.75
14	CKRH4D28-180	18	168	0.70
15	CKRH4D28-220	22	235	0.68
16	CKRH4D28-270	27	261	0.56
17	CKRH4D28-330	33	333	0.53
18	CKRH4D28-390	39	383	0.50
19	CKRH4D28-470	47	587	0.48
20	CKRH4D28-560	56	624	0.40
21	CKRH4D28-680	68	699	0.35
22	CKRH4D28-820	82	916	0.28
23	CKRH4D28-101	100	1020	0.29
24	CKRH4D28-121	120	1270	0.27
25	CKRH4D28-151	150	1352	0.23
26	CKRH4D28-181	180	1540	0.22

无铅

测定频率 100kHz

电感公差范围 ($\pm 30\%$)

额定电流: 指电感值减小到原值 65%时的电流。

