


型名: CKRH5D28

1. 尺寸(毫米)

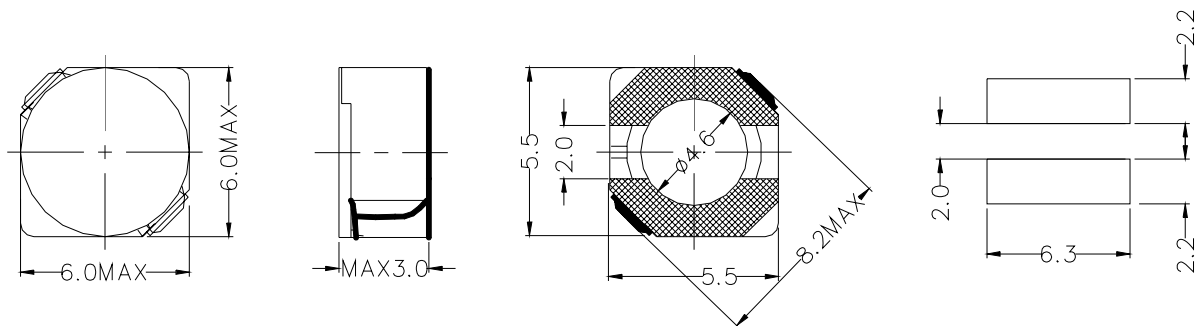

2. 技术参数

NO.	品 名	电感(μ H)	电阻 (m Ω) (MAX)	额定电流 (A)
1	CKRH5D28-2R5	2.5	20	2.56
2	CKRH5D28-3R0	3.0	25	2.40
3	CKRH5D28-4R2	4.2	34	2.16
4	CKRH5D28-5R3	5.	38	1.90
5	CKRH5D28-6R2	6.2	46	1.75
6	CKRH5D28-8R2	8.2	55	1.60
7	CKRH5D28-100	10	67	1.24
8	CKRH5D28-120	12	75	1.20
9	CKRH5D28-150	15	102	1.04
10	CKRH5D28-180	18	112	1.00
11	CKRH5D28-220	22	120	0.85
12	CKRH5D28-270	27	176	0.78
13	CKRH5D28-330	33	190	0.75
14	CKRH5D28-390	39	212	0.66
15	CKRH5D28-470	47	250	0.62
16	CKRH5D28-560	56	309	0.54
17	CKRH5D28-680	68	350	0.52
18	CKRH5D28-820	82	460	0.45
19	CKRH5D28-101	100	524	0.40

无铅

测定频率 100kHz

电感公差范围 ($\pm 30\%$)

额定电流: 指电感值减小到原值 65%时的电流.

