


型名: CKRH5D28R

1. 尺寸(毫米)

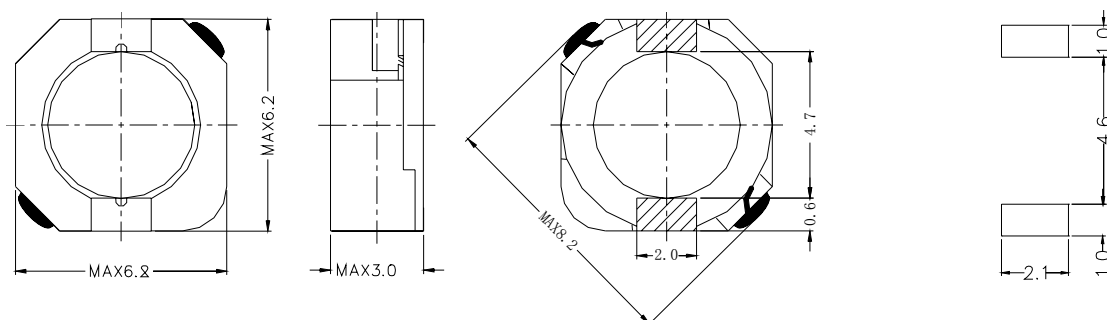

2. 技术参数

NO.	品 名	电感(μ H)	电阻 (m Ω) (MAX)	额定电流 (A)
1	CKRH5D28R-2R5	2.5	18	2.53
2	CKRH5D28R-3R3	3.3	20	2.30
3	CKRH5D28R-4R0	4.0	29	2.04
4	CKRH5D28R-5R0	5.0	31	1.80
5	CKRH5D28R-6R0	6.0	43	1.64
6	CKRH5D28R-8R0	8.0	49	1.50
7	CKRH5D28R-100	10	54	1.25
8	CKRH5D28R-120	12	71	1.18
9	CKRH5D28R-150	15	83	1.10
10	CKRH5D28R-180	18	101	1.03
11	CKRH5D28R-220	22	120	0.90
12	CKRH5D28R-270	27	146	0.80
13	CKRH5D28R-330	33	182	0.75
14	CKRH5D28R-390	39	210	0.65
15	CKRH5D28R-470	47	229	0.60
16	CKRH5D28R-560	56	305	0.54
17	CKRH5D28R-680	68	353	0.46
18	CKRH5D28R-820	82	418	0.43
19	CKRH5D28R-101	100	522	0.38

无铅

测定频率 100kHz

电感公差范围 ($\pm 30\%$)

额定电流: 指电感值减小到原值 65%时的电流.

