


型名: CKRH6D38

1. 尺寸(毫米)

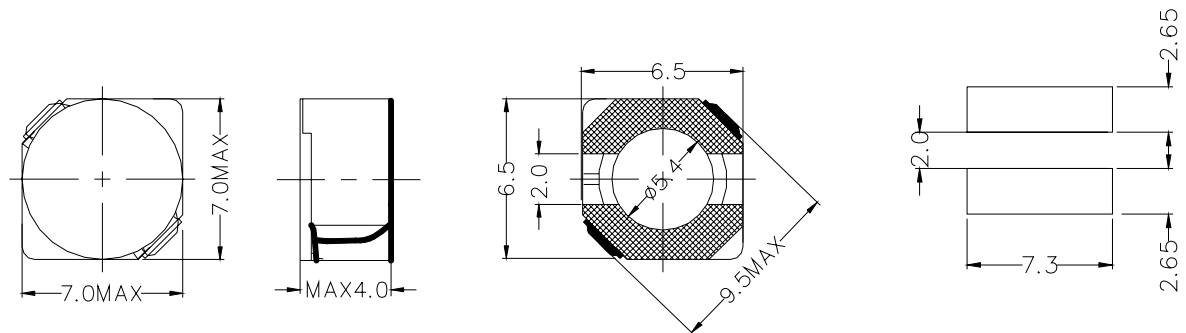

2. 技术参数

NO.	品 名	电感(μ H)	电阻 (m Ω) (MAX)	额定电流 (A)
1	CKRH6D38-3R3	3.3	22	3.48
2	CKRH6D38-5R0	5.0	25	2.88
3	CKRH6D38-6R2	6.2	28	2.50
4	CKRH6D38-7R4	7.4	34	2.28
5	CKRH6D38-8R7	8.7	35	2.18
6	CKRH6D38-100	10	38	2.00
7	CKRH6D38-120	12	55	1.64
8	CKRH6D38-150	15	58	1.58
9	CKRH6D38-180	18	92	1.46
10	CKRH6D38-220	22	95	1.30
11	CKRH6D38-270	27	112	1.16
12	CKRH6D38-330	33	125	1.08
13	CKRH6D38-390	39	140	1.00
14	CKRH6D38-470	47	157	0.93
15	CKRH6D38-560	56	200	0.84
16	CKRH6D38-680	68	237	0.72
17	CKRH6D38-820	82	325	0.70
18	CKRH6D38-101	100	362	0.62

无铅

测定频率 100kHz

电感公差范围 ($\pm 30\%$)

额定电流: 指电感值减小到原值 65%时的电流.

