


型名: CKRH8D38

1. 尺寸(毫米)

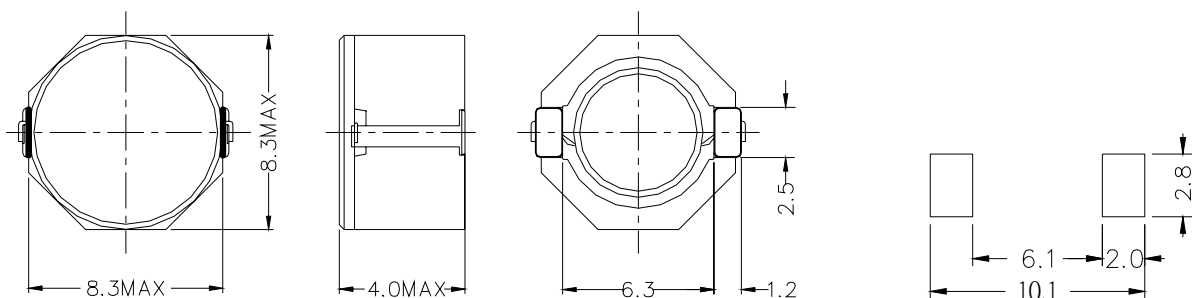

2. 技术参数

NO.	品名	电感(μ H)	电阻 ($m\Omega$) (MAX)	额定电流 (A)
1	CKRH8D38-1R8	1.8	16	7.00
2	CKRH8D38-2R5	2.5	19	6.43
3	CKRH8D38-3R5	3.5	24	5.00
4	CKRH8D38-4R7	4.7	30	4.56
5	CKRH8D38-6R0	6.0	30	4.10
6	CKRH8D38-100	10	47	3.00
7	CKRH8D38-150	15	67	2.70
8	CKRH8D38-220	22	100	2.28
9	CKRH8D38-330	33	152	1.70
10	CKRH8D38-470	47	180	1.50
11	CKRH8D38-680	68	280	1.30
12	CKRH8D38-101	100	397	1.02

无铅

测定频率 100kHz

电感公差范围 ($\pm 30\%$)

额定电流: 指电感值减小到原值 65%时的电流.

